

Solid State Relays SOLITRON MIDI Current Sensing Type RJCS



- AC semiconductor contactor
- Integrated under current monitoring
- Zero switching (RJCS1A)
- Direct copper bonding (DCB) technology
- LED-indication
- Cage clamp output terminals
- 4-32 VDC control input
- Operational ratings up to 50 AACrms and 600 VAC
- Local and remote alarm status
- Set-point adjustable
- Time delay adjustable
- Local and remote setup

Product Description

The SOLITRON Midi Current Sensing is a compact, single-phase SSR that is sensitive to variations in load conditions in industrial heating applications. This microprocessor-based device is ideal for detection of partial load failure and to ensure the highest process quality. Current sensing is integrated inside to eliminate the need to install an external current transformer. A membrane "button" on the front is used to effect a simple "teach in" of the current setpoint. Alarm delay time is set by a potentiometer. A drop in setpoint current of more than 13% will trigger an open collector alarm. Up to 50 alarm outputs can be connect-

ed in parallel to a standard PLC input. Typical conditions that can be detected are heater break or open-circuit, blown fuse, semiconductor short-circuit and faulty power connection.

Device over-temperature protection is integrated as a standard feature.

The product is ready to mount on DIN-rail or chassis and comes with integral heatsink. The standard housing dimensions enable straightforward replacement of alternative products.

Ordering Key RJCS 1 A 60 D 50 E P NO

Solid State Relay	_____
Current Sensing	_____
Number of poles	_____
Switching mode	_____
Rated operational voltage	_____
Control voltage	_____
Rated operational current	_____
Terminal layout	_____
Over-temperature protection	_____
Alarm output type	_____

Type Selection

Switching mode	Rated operational voltage	Control voltage	Rated operational current	Terminal layout	Protection	Alarm output type
A: Zero switching	23: 230 VACrms 60: 600 VACrms	D: 4 - 32 VDC	50: 50 AACrms	E: Contactor	P: Over-temp. protection	NO: NPN, Normally open PO: PNP, Normally open

Selection Guide

Rated operational voltage	Non-rep. voltage	Control voltage	Supply voltage	Alarm output type	Rated operational current 50 A
230 VACrms	650 Vp	4 - 32 VDC	24 VDC	NPN, NO PNP, NO	RJCS1A23D50EPNO RJCS1A23D50EPPO
600 VACrms	1200 Vp	4 - 32 VDC	24 VDC	NPN, NO PNP NO	RJCS1A60D50EPNO RJCS1A60D50EPPO

General Specifications

	RJCS1.23..	RJCS1.60..
Operational voltage range	24 to 265 VAC	42 to 660 VAC
Non-rep. peak voltage	650 V _p	1200 V _p
Operational frequency range	45 to 65 Hz	45 to 65 Hz
Measuring range	8-50 AACrms	8-50 AACrms
Power factor	≥ 0.5 @ 230 VACrms	≥ 0.5 @ 600 VACrms
Approvals	UL, cUL	
CE-marking	Yes	
Supply status indication	Green LED, half intensity	
Control status indication	Green LED	
Over-temperature alarm trip indication	Red LED, intermittent	
Alarm indication (except for over-temperature trip)	Red LED	

Input Specifications

Control voltage range	4 - 32 VDC
Pick-up voltage	3.8 VDC
Reverse voltage	32 VDC
Drop-out voltage	1.2 VDC
Maximum control input current	1.5 mA
Response time pick-up	≤ 1/2 cycle
Response time drop-out	≤ 1/2 cycle

Supply Specifications

Power supply voltage, V _{cc}	24 VDC ± 15%
Max. supply current	22 mA (per device)
Max. PLC current @ 24VDC during normal conditions	275 µA (per device)

Output Specifications

Rated operational current	
AC51 @Ta=25°C	50 AACrms
AC53a @Ta=25°C	30 AACrms
Min. TEACH current	8 AACrms
Min. partial load current	1.3 AACrms
Rep. overload current t = 1s	< 200 AACrms
Non rep. surge current T _j (init.) = 25°C and t = 10 ms	1900 A _p
Off-state leakage current @ rated voltage and frequency	< 3 mArms
I ² t for fusing t = 10 ms	18000 A ² s
On-state voltage drop @ rated current	1.6 Vrms
Critical dV/dt off-state	1000 V/µs

Housing Specifications

Weight	Approx. 380 g
Housing material	PBT Flame retardant
Control terminal cable size	
Min	1 x 0.5 mm ² (1 x AWG20)
Max	1 x 4.0 mm ² (1 x AWG12) or 2 x 2.5 mm ² (2 x AWG14)
Mounting torque max.	0.6 Nm Posidriv 0 bit
Control terminal screws	M3
Power terminal cable size	
Min	1 x 4 mm ² (1 x AWG12)
Max	1 x 25 mm ² (1 x AWG3) or 2 x 10 mm ² (2 x AWG6)
Mounting torque max.	2.5 Nm Posidriv 2 bit
Power terminal screws	M5

Thermal Specifications

Operating temperature	-20 to +60°C (-4 to +140 °F)
Storage temperature	-40 to +100°C (-40 to +212 °F)


Insulation

Rated insulation voltage	
Input to output	≥ 4000 VACrms
Output to case	≥ 4000 VACrms


Alarm Specifications

Output current, i _o	≤50 mADC
Output voltage	
NPN	1 + 0.15i _o
PNP	V _{cc} - 1 - 0.15i _o
No. of outputs in parallel	≤50

Derating Curve

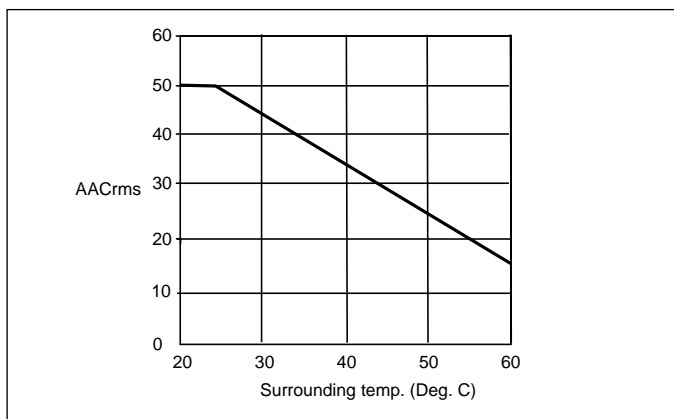


Dissipation Curve

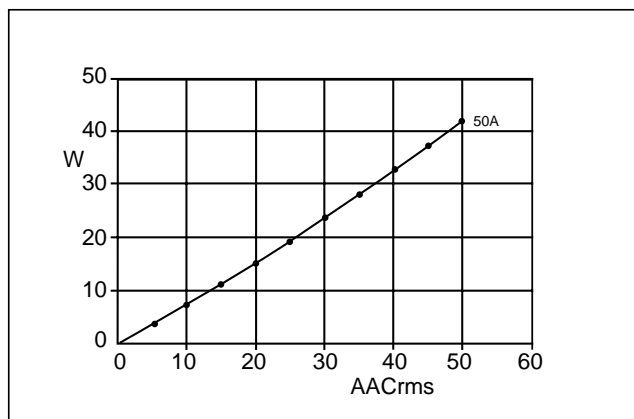

Note: Based on 100% duty cycle

Connection Examples

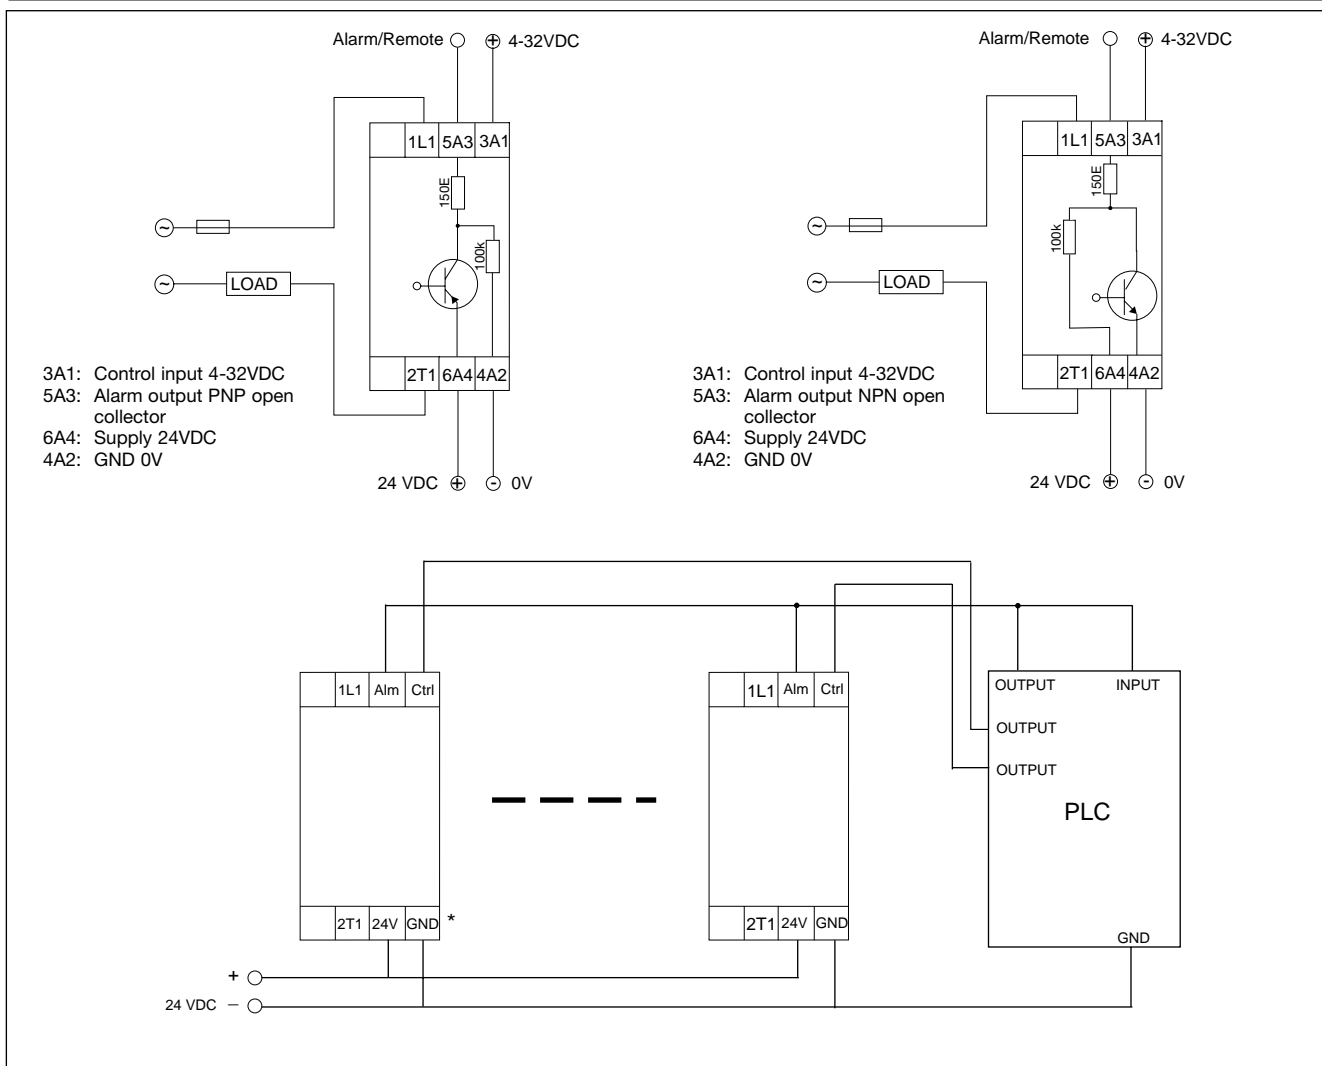

Notes:

1. Control input (terminal A1) and 24VDC supply (terminal A3) must have common ground
2. RJCS ... and PLC should be sourced from the same 24VDC supply
3. RJCS ... PO and RJCS ...NO should not be connected to the same alarm line
4. It is recommended that up to 6 identical loads are connected in parallel.

Alarm Operation

1.1 Current Setpoint

The current setpoint is the nominal operating current that is expected when all the heater loads are functioning properly. If the heater loads are faulty or the supply voltage is not close to the nominal level, the wrong setpoint will be stored.

1.2 Initialisation

When the device is shipped, no setpoint is stored in the flash memory. Both green and red LEDs will flash intermittently to indicate that a setpoint must be stored using the **TEACH** procedure.

1.3 Local Functions

Local functions can be activated by using the push button on the front of the device. While an alarm is being issued by any SSR connected to the common alarm line, no local commands are accepted.

1.3.1 Local TEACH

Press and hold the push button for approximately 3 seconds. The red LED will flash after each second. After the LED flashes 3 times, release the button. If the "teach" command has been accepted the heater loads are automatically switched ON. The red LED will flash quickly 10 times. When the current setpoint has been stored successfully, the red and green LEDs will scroll intermittently to indicate that the **TEACH** procedure has been completed.

It is very important to hold the button down for only 3 flashes of the red LED to make a successful **TEACH**. If the **TEACH** procedure is not successful, the device will automatically reset to factory default (i.e. no setpoint stored).

1.3.2 Local RESET

When an alarm has occurred the device can be locally **RESET** by pressing the push button for 1 second. The red LED will flash once. This will reset the alarm. If the alarm condition has been cleared

the device will return to normal operation. If the alarm condition is still active, the device will automatically go back to alarm status.

1.3.3 Local TEST

In the absence of a signal on the "control input" terminal, a local TEST can be made by pressing and holding the button for 5 seconds. After the red LED flashes 5 times, release the button. The device will switch ON the loads for 1 second. This test detects if there is an under-current or heater break alarm condition.

1.4 Remote Setup Procedure

Remote functions can be activated with a PLC or any other logic controller by applying timed pulses to the alarm terminal: >10V for RJCS...PO and <10V for RJCS...NO.

1.4.1 Remote TEACH

Apply a 3 second pulse. The red LED will flash after each second. After the LED flashes 3 times and the "teach" command has been accepted, the heater loads (of all SSRs connected to the same alarm line) are automatically switched ON and the red LED will flash quickly 10 times. When the current setpoint has been stored successfully, the red and green LEDs will scroll intermittently to indicate that the **TEACH** procedure has been completed.

1.4.2 Remote RESET/UNBLOCK

When an alarm has occurred the device can be remotely **RESET** by applying a 1 second pulse. A 1 second pulse will also unblock local **TEACH** of all SSRs connected to the similar alarm line. The red LED will flash once. This will reset the alarm. If the alarm condition has been cleared the device will return to normal operation. If the alarm condition is still active, the device will automatically go back to alarm status.

1.4.3 Remote BLOCK

Applying a 5 second pulse will induce the device to block local **TEACH**. After this, no local **TEACH** commands are accepted. To unblock this situation, a remote **RESET** must be issued. If 24V supply is removed, local **TEACH BLOCK** is lost. Another **REMOTE BLOCK** should be issued.

2 Alarms

2.1 Alarm DELAY

A potentiometer on the front of the device allows a time delay on the heater break alarm between 2 and 40 seconds. For an alarm signal to occur, the alarm condition must persist throughout this time period. The alarm output is enabled only after this time delay has passed. However, if the control input is disabled for a period of time equal to four times the delay setting, the internal alarm delay count is reset automatically.

2.2 Relay remains OFF due to Line Voltage Loss or Thyristor Open Circuit Failure.

The device generates one pulse with duration of 7 seconds on the alarm terminal. This alarm is non-latching. The red LED remains ON after this alarm condition until a **RESET** is issued.

2.3 Heater Break.

A **Heater Break** alarm is given if the current measured through the device is 13% less than the Current Setpoint stored in the flash memory. The device generates one pulse with duration of 8 seconds on the alarm terminal. The alarm signal is non-latching. The red LED remains ON after this alarm condition until a **RESET** is made. If the measured current changes to within 10% of the Current Setpoint, before the **Alarm DELAY** time has elapsed, the **Alarm DELAY** timer is reset.

2.4 Over-temperature or Over-current.

This alarm occurs if any one of following two conditions is true:

1. The device detects an internal over-temperature condition at any time during operation and switches off the output. The red LED flashes intermittently.
2. A current above the nominal device rating is measured during current setpoint **TEACH**. This action erases the current setpoint from flash memory and both red and green LEDs will flash intermittently until a **TEACH** procedure with an acceptable current is carried out.

In both cases, the device generates one pulse with duration of 9 seconds on the alarm terminal. The alarm signal is non-latching.

2.5 Thyristor Short Circuit.

The device generates one pulse with duration of 10 seconds on the alarm terminal. The alarm signal is non-latching. The red LED remains ON after this alarm condition until a **RESET** is made.


2.6 Alarms Connected in Parallel to one PLC Input and one PLC Output.

For **REMOTE** operation, up to 50 devices can be connected in parallel to at least one PLC input. This PLC input must also be connected in parallel to the PLC output. The PLC input must be programmed to detect alarms while the PLC output must be programmed to supply the pulses required for **REMOTE Setup**. When more than one device is present, pulses from the PLC output or alarm pulses from any device will cause the red LEDs on all devices in parallel to flash intermittently for a max. of 6.25 seconds. After this time, if there is a device in alarm condition, only the red LED of that device will be ON.


Example

The alarm delay is set at 2s (min). If the full load current is set at 30A, then there will be an alarm condition if the current is under 26.1A for more than 2s. (Any fluctuation in the load current that is present for <2s will not be signalled – this is intended to eliminate false alarms due to short duration under-voltage conditions on the supply phase). If the control input goes off within the 2s, the alarm timer will not be reset provided the control input goes on again within 8s (4x2s).


Alarm Operation

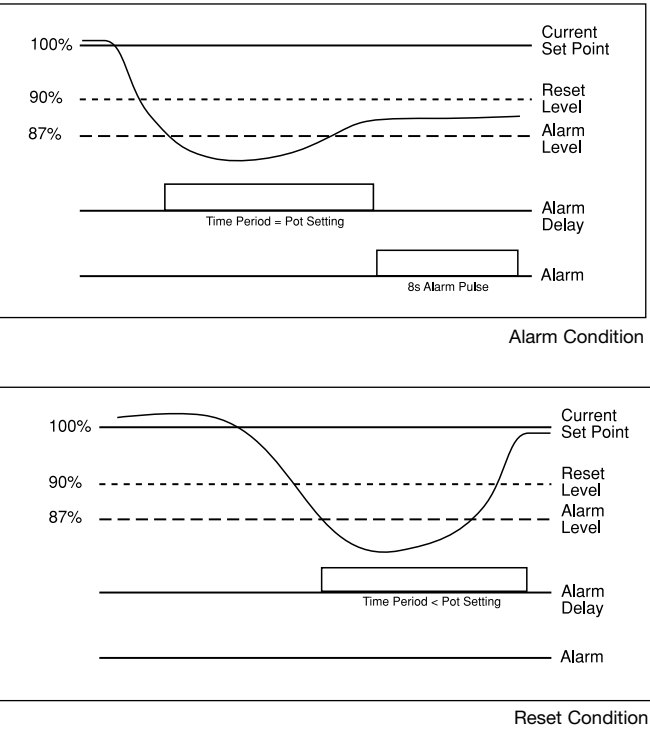

Dimensions

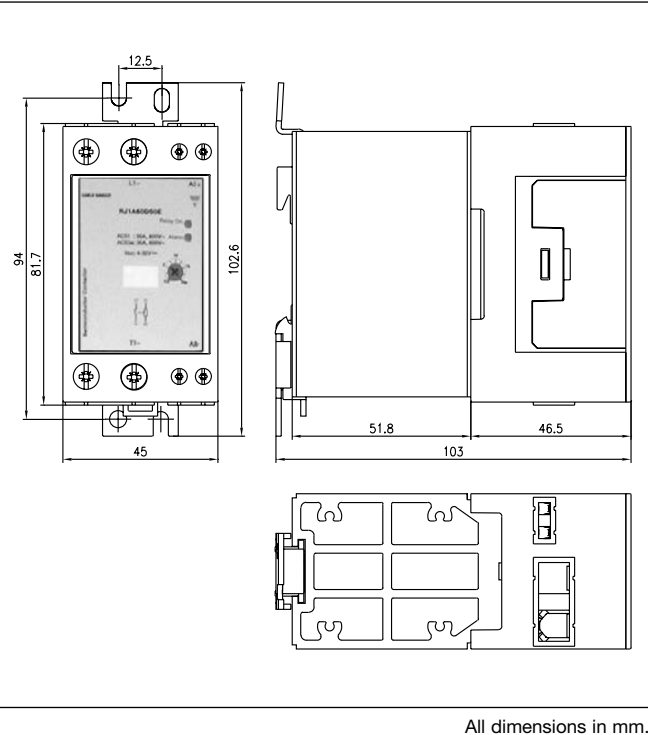












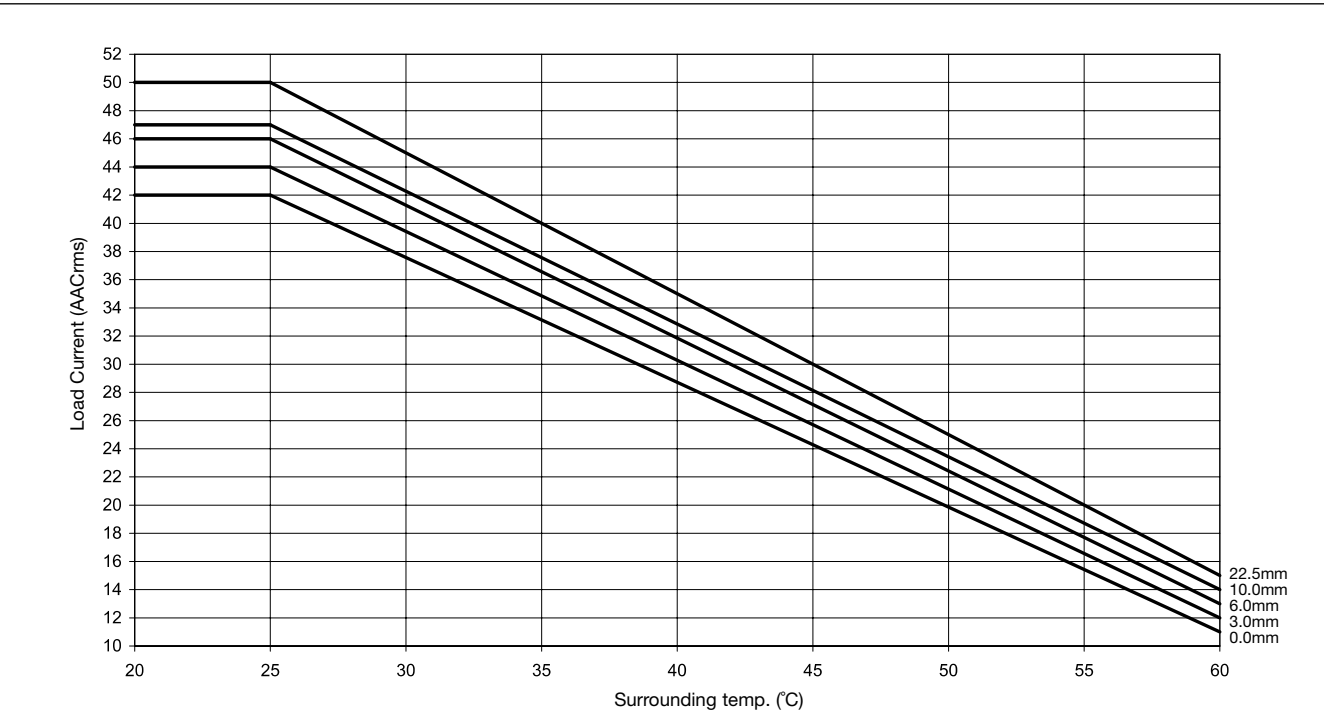
















Derating vs. Spacing Curves



Note: Based on 100% duty cycle
Specifications are subject to change without notice (27.06.2006)

Setup and Alarms

RESET	Remote reset	PLC output to alarm terminal high >1s (<2s)	
	Local reset	Push and hold button for >1s (<2s)	
	Visual indication	Red LED ON	
TEACH	Remote teach	PLC output to alarm terminal high >3s (<4s)	
	Local teach	Push and hold button for >3s (<4s)	
	Visual indication	Red LED ON	
TEST	Remote test	Not available	
	Local test	Push and hold button for >5s (<6s)	
	Visual indication	Red LED ON	
BLOCK	Remote block	PLC output to alarm terminal high >5s (<6s)	
	Local Block	Not available	
	Visual Indication	Red LED ON	
ALARMS	Control input	Green LED - full intensity	
	Relay remains OFF due to line voltage loss or thyristor open circuit fault	Transistor alarm non-latching pulse (7s)	
	Visual indication	Red LED ON (latching)	
	A current less than 84% of minimum TEACH current flows during TEACH	Transistor alarm non-latching pulse (7s)	
	Visual indication	Red and GREEN LEDs flashing together	
	Control input	Green LED - full intensity	
	Heater Break alarm	Transistor alarm non-latching pulse (8s)	
	Visual indication	Red LED ON (latching)	
	Current over-range detected during TEACH	Transistor alarm non-latching pulse (8s)	
	Visual indication	Red and GREEN LEDs flashing together	
	Control input	Green LED - full intensity	
	Reset	Local or remote 1s pulse	
	Over-temperature alarm	Transistor alarm non-latching pulse (9s)	
	Visual indication	Red LED flashing	
	SSR output	Output is switched off during an OTP alarm	
	Control input	Green LED - full intensity	
	Thyristor short-circuit	Transistor alarm non-latching pulse (10s)	
	Visual indication	Red LED ON (latching)	

Note: Above shows pulses for PNP device