

CDT3050

P. 1

3-DIGIT DOWN TIMER IC

■ DESCRIPTION

The CDT3050 is a low voltage 3 digits LCD driver for advanced **Count Down Timer**.

Minimal components are used.

With START/STOP and RECALL setting functions.

LCD: 1/2 Duty, 1/2 Bias, 2 Commons

■ FEATURES

- CMOS Technology
- Supply Voltage Range : 1.2 ~ 1.8VDC
- Low Standby Current < 5 μ A
- With a Trigger Output Capability
- Time Setting : Max: 999 Minutes
Min: 1 Minute
- 32768 Hz Crystal used
- LCD displays Seconds until the last minute
- 16 seconds, 4Hz (64 Sounds) BiBi Alarm when time runs out
- “★” - Operating symbol
- “S” - Seconds symbol

■ APPLICATIONS

- Count Down Timer
- Electronic Timer
- Setting Control Timer

■ DEVICE TYPE


Type No.	Package
CDT3050	Chip form

■ DC ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min	Type	Max	Unit
Operation Voltage	VDD	1.2	1.5	1.8	V
Operation Current	I _{dd}	-	-	2.0	μ A
BZ Driver Current	I _{bz}	2.0	-	-	mA
Crystal		-	32768	-	Hz
LCD Display Freq		-	32	-	Hz
K0~K9 Input Current	I _{key}	-	-	5	μ A
Trigger Output Current	I _{trig}	1	-	-	mA

Above testing conditions are based on VDD=1.5V


■ PAD ASSIGNMENT

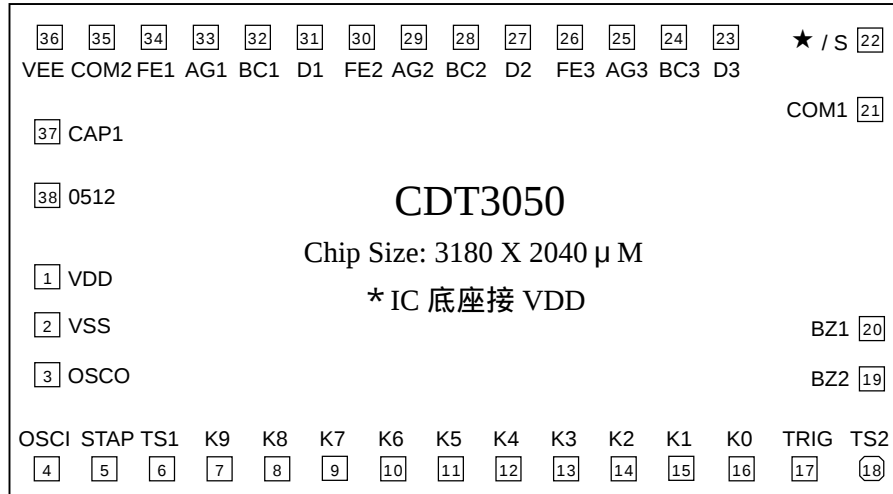

■ PIN DESCRIPTIONS


Chip PAD	Symbol	Functions Description
1	VDD	Positive Power Supply
2	VSS	Negative Power Supply
3	OSCO	Oscillator Output , with 32,768Hz Crystal
4	OSCI	Oscillator Input
5	STAP	START/STOP key, START, STOP push switch
6	TS1	Internal Testing pin
7	K9	Time Setting Key (9)
8	K8	Time Setting Key (8)
9	K7	Time Setting Key (7)
10	K6	Time Setting Key (6)
11	K5	Time Setting Key (5)
12	K4	Time Setting Key (4)
13	K3	Time Setting Key (3)
14	K2	Time Setting Key (2)
15	K1	Time Setting Key (1)
16	K0	Time Setting Key (0)

CDT3050	P. 3
3-DIGIT DOWN TIMER IC	

Chip PAD	Symbol	Functions Description
17	TRIG	Trigger Output : 
18	TS2	Internal Testing pin
19	BZ2	Buzzer Output
20	BZ1	Buzzer Output Continues BiBi Alarm, 16sec 4Hz – 64 Sounds
21	COM1	LCD Common1
22	/S	() Timer is working ; (S) <u>Seconds</u> symbol
23	D3	LCD segment
24	BC3	LCD segment
25	AG3	LCD segment
26	FE3	LCD segment
27	D2	LCD segment
28	BC2	LCD segment
29	AG2	LCD segment
30	FE2	LCD segment
31	D1	LCD segment
32	BC1	LCD segment
33	AG1	LCD segment
34	FE1	LCD segment
35	COM2	LCD Common2
36	VEE	Voltage Doubled Input
37	CAP1	Voltage Doubled Capacitor
38	0512	Voltage Doubled Capacitor

■ APPLICATION CIRCUITS

10 KEYS SETTING TIMER

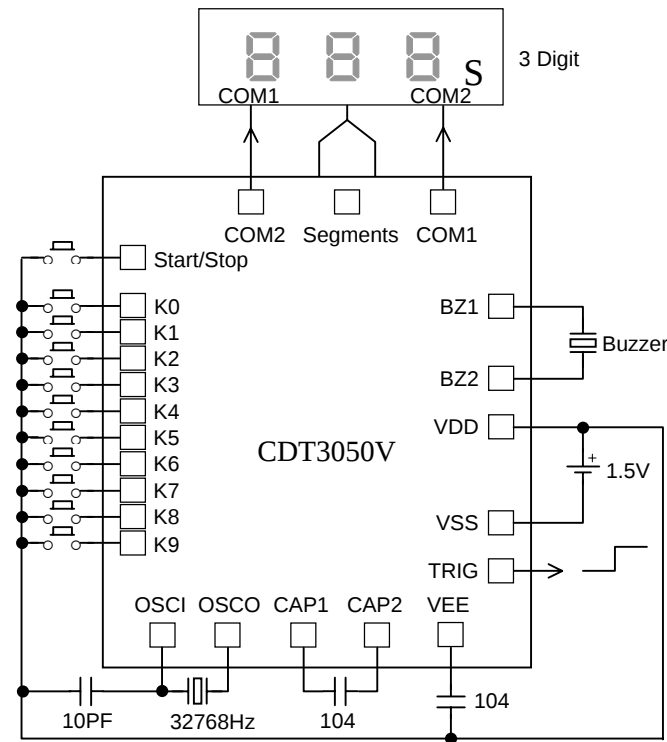

■ LCD DRAWING

