

NON-ISOLATED DC/DC CONVERTERS

2.4 V - 5.5 V Input 0.75 V - 3.63 V/16 A Output

bel
POWER PRODUCTS

SRBC-16F1Ax Series

RoHS Compliant

- Non-Isolated
- High Efficiency
- High Power Density
- Fixed Frequency (300 kHz)
- Remote On/Off
- Converter Can Sink and Source Current
- Under-voltage Lockout (UVLO)
- Over Temperature Protection
- OCP/SCP
- Wide Input
- Wide Trim Range
- Remote Sense
- Active High/Low (option)



Description

The Bel SRBC-16F1Ax modules are a series of non-isolated dc/dc converters that deliver up to 16 A of output current with full load efficiency of 94% at 3.3 V output. These modules provide precisely regulated voltage programmable via external resistor from 0.75 V to 3.63 V over a wide range of input voltage ($V_{in}=2.4-5.5V$). The open-frame construction and small footprint enable designers to develop cost and space-efficient solutions. Standard features include remote On/Off, over current protection, short current protection, wide input, and programmable output voltage.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active Low	Model Number Active High	Model Number Active Low
0.75 V-3.63 V ¹	2.4 V-5.5 V	16 A	58 W	94%	SRBC-16F1AL	SRBC-16F1A0	SRBC-16F1AW ²

Notes: 1. These modules use a buck topology, so the output voltages must be 0.8 V less than the input voltage.
2. "W" indicates special coating.
3. Add "G" to the end of the Model Number to indicate Tray Packaging.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	5.8 V	
Output Enable Terminal Voltage	-0.3 V	-	5.8 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Note: All specifications are typical at 25 °C unless otherwise stated.

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage				
$V_o \leq 1.5 V$	2.4 V	-	5.5 V	
$V_o = 1.8 - 2.5 V$	3.0 V	-	5.5 V	
$V_o = 3.3 V$	4.5 V	-	5.5 V	
Input Current (full load)				
$V_o = 3.3 V$	-	11.23 A	15.10 A	
$V_o = 2.5 V$	-	8.70 A	14.81 A	
$V_o = 1.8 V$	-	6.40 A	13.64 A	
$V_o = 1.5 V$	-	5.45 A	11.76 A	
$V_o = 1.2 V$	-	4.52 A	9.64 A	
$V_o = 0.75 V$	-	3.05 A	6.69 A	

NON-ISOLATED DC/DC CONVERTERS

2.4 V - 5.5 V Input 0.75 V - 3.63 V/16 A Output



Input Specifications (continued)

Parameter	Min	Typ	Max	Notes
Input Current (no load)	-	80 mA	-	
Remote Off Input Current	-	10 mA	22 mA	
Input Reflected Ripple Current (pk-pk)	-	100 mA	-	With simulated source impedance of 1 μ H, 5 Hz to 20 MHz and two 100 μ F /10 V external input Tantalum capacitors at the input.
Input Reflected Ripple Current (rms)	-	40 mA	-	
I ² t Inrush Current Transient	-	0.15 A ² s	0.3 A ² s	
Turn-on Voltage Threshold	-	2.2 V	-	
Turn-off Voltage Threshold	-	2.0 V	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	-2% V _{o,set}	-	2% V _{o,set}	V _{in} =5 V, I _o =I _o max
Output Voltage Set Point	-3% V _{o,set}	-	3% V _{o,set}	Over all operating input voltage, resistive load, and temperature conditions
Load Regulation	-	0.4% V _{o,set}	-	I _o =I _o min to I _o max
Line Regulation	-	0.3% V _{o,set}	-	V _{in} =V _{in} min to V _{in} max
Regulation Over Temperature (-40 °C to +85 °C)	-	0.5% V _{o,set}	-	
Output Current	0 A	-	16 A	
Current Limit Threshold	19 A	-	35 A	
Short Circuit Surge Transient	-	1.6 A ² s	2 A ² s	
Ripple and Noise (pk-pk)	-	25 mV	50 mV	Tested with 0-20 MHz, with external 10 μ F/16 V tantalum capacitor & 1 μ F /10 V TDK ceramic capacitor
Ripple and Noise (rms)	-	8 mV	15 mV	
Turn on Time	-	4 mS	8 mS	
Overshoot at Turn on	-	0%	3%	
Output Capacitance ESR \geq 1 mohm ESR \geq 10 mohm	0 μ F 0 μ F	- -	1000 μ F 5000 μ F	
Transient Response				
50% ~ 100% Max Load	V _o =0.75-3.3 V	-	300 mV	di/dt=2.5 A/ μ S; V _{in} =5 V; and with external 10 μ F / 16 V Tantalum capacitors and 1 μ F/10 V ceramic capacitor at the output
Settling Time		-	50 μ S	
100% ~ 50% Max Load		-	300 mV	
Settling Time		-	50 μ S	
50% ~ 100% Max Load	V _o =0.75-3.3 V	-	150 mV	di/dt=2.5 A/ μ S; V _{in} =5 V; and with external 2 x 150 μ F / 10 V Tantalum capacitors and 1 μ F/10 V ceramic capacitor at the output
Settling Time		-	100 μ S	
100% ~ 50% Max Load		-	150 mV	
Settling Time		-	100 μ S	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

2.4 V - 5.5 V Input 0.75 V - 3.63 V/16 A Output



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=5 V, full load
Vo=3.3 V	92%	94%	-	
Vo=2.5 V	90%	92%	-	
Vo=1.8 V	88%	90%	-	
Vo=1.5 V	85%	88%	-	
Vo=1.2 V	82%	85%	-	
Vo=0.7525 V	76%	79%	-	
Switching Frequency	250 kHz	300 kHz	350 kHz	
Over Temperature Shutdown	-	125 °C	-	
Output Voltage Trim Range	0.7525 V	-	3.63 V	Total adjustment of trim, setpoint and remote sense combined should not exceed 3.63 V. Vo=0.7525 V when trim pin open
Remote Sense Compensation	-	-	5%	
MTBF	5,438,000 hours			Calculated Per Bell Core SR-332 (Io = 80% Io, max; Vo=1.8 V; Vin=5.0 V; Ta = 25 °C)
Dimensions				
Inches (L x W x H)	1.3 x 0.53 x 0.315			
Millimeters (L x W x H)	33.02 x 13.46 x 8.00			
Weight	-	6.6 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.


Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.3 V	-	0.3 V	SRBC-16F1A0; Remote On/Off pin open, Unit on.
Signal High (Unit On)	1.5 V	-	5.8 V	
Signal Low (Unit On)	-0.3 V	-	0.3 V	SRBC-16F1AL & SRBC-16F1AW; Remote On/Off pin open, Unit on.
Signal High (Unit Off)	1.5 V	-	5.8 V	

Output Trim Equations


Equation for calculating the trim resistor (in KΩ) given the desired adjusted voltage (Vadj) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \frac{21.07}{V_{adj} - 0.7525} - 5.11$$

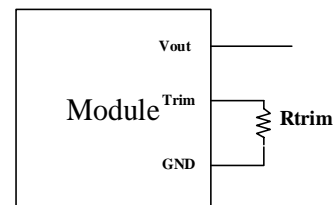

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (Vadj) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.

$$V_{trim} = 0.7 - 0.1698 \times (V_{adj} - 0.7525)$$

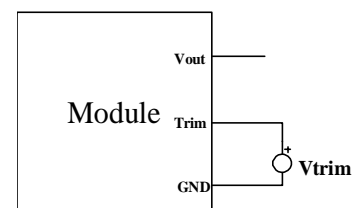


NON-ISOLATED DC/DC CONVERTERS


2.4 V - 5.5 V Input 0.75 V - 3.63 V/16 A Output




Efficiency Data

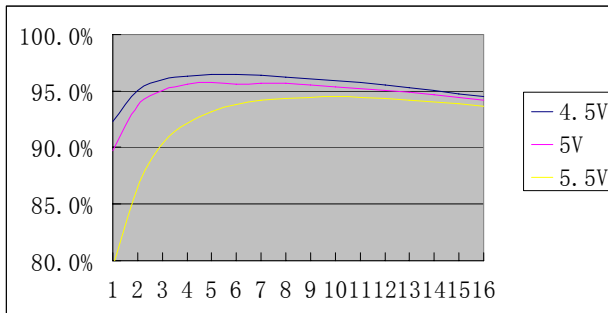


$V_o = 3.3\text{ V}$

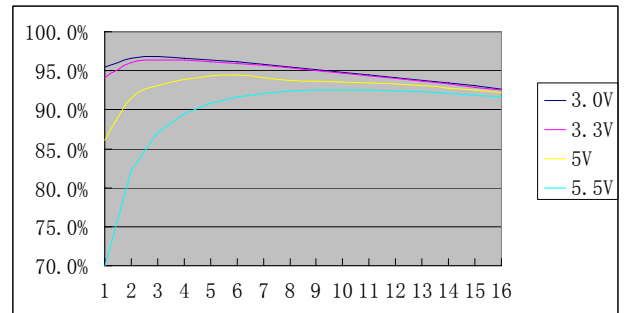


$V_o = 2.5\text{ V}$

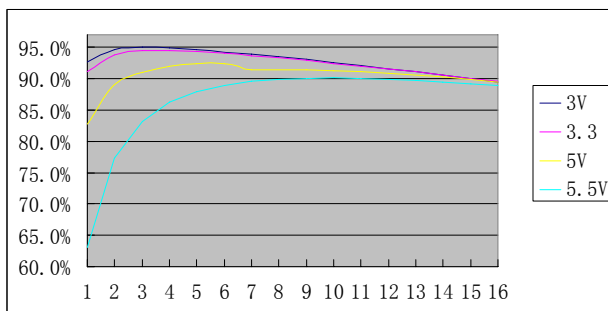


$V_o = 1.8\text{ V}$

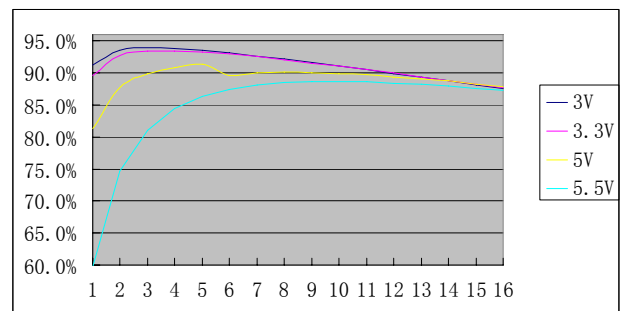

$V_o = 1.5\text{ V}$

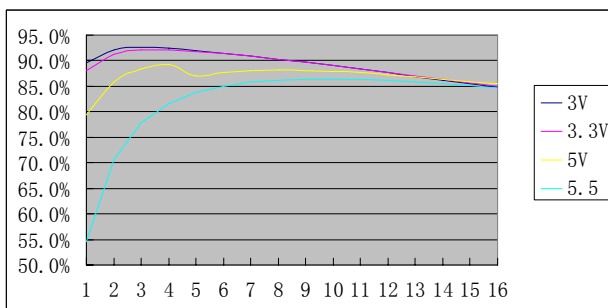

$V_o = 1.2\text{ V}$

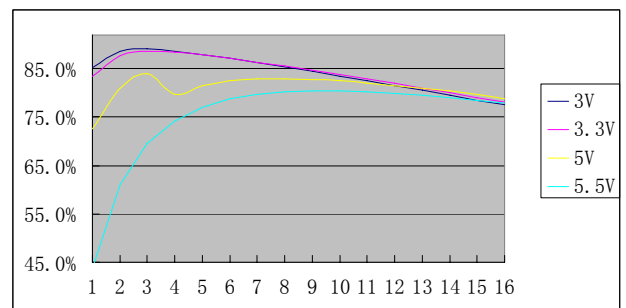


$V_o = 0.75\text{ V}$

NON-ISOLATED DC/DC CONVERTERS


2.4 V - 5.5 V Input 0.75 V - 3.63 V/16 A Output




Thermal Derating Curves

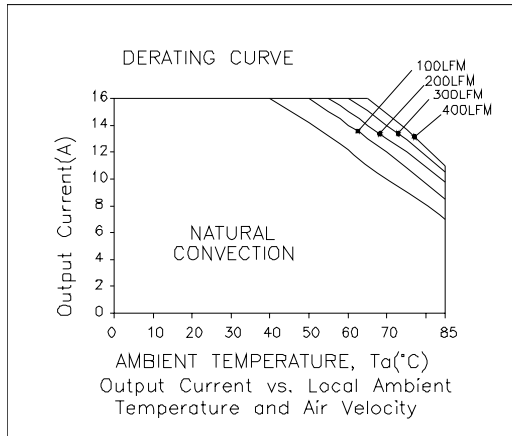


Vin=5.0 V, Vo=3.3 V or 2.5 V

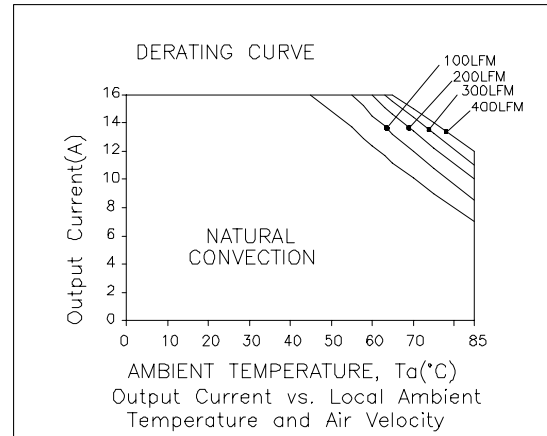


Vin=5.0 V, Vo=1.8 V or 1.5 V

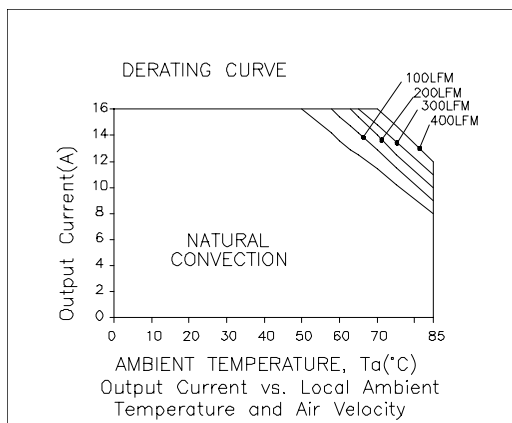

Vin=5.0 V, Vo=0.7525 V or 1.2 V

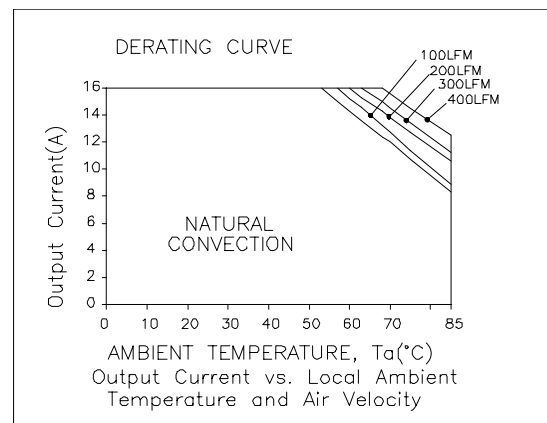

Vin=3.3 V, Vo=1.8 V or 1.5 V

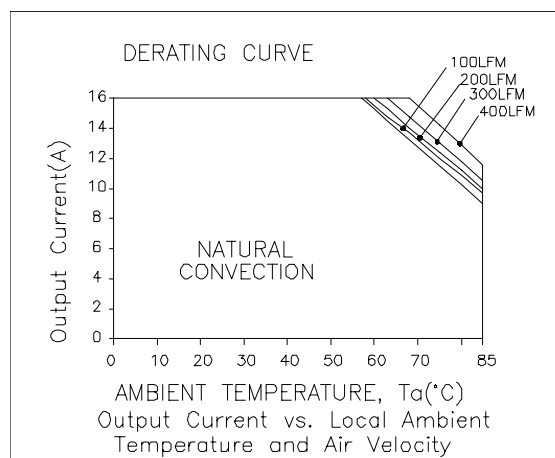


Vin=3.3 V, Vo=0.7525 V or 1.2 V

NON-ISOLATED DC/DC CONVERTERS


2.4 V - 5.5 V Input 0.75 V - 3.63 V/16 A Output




Ripple and Noise Waveforms

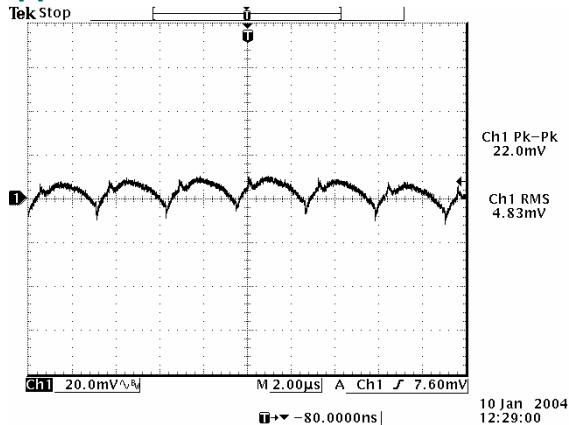


Vin=5.0 V, Vo=0.75 V

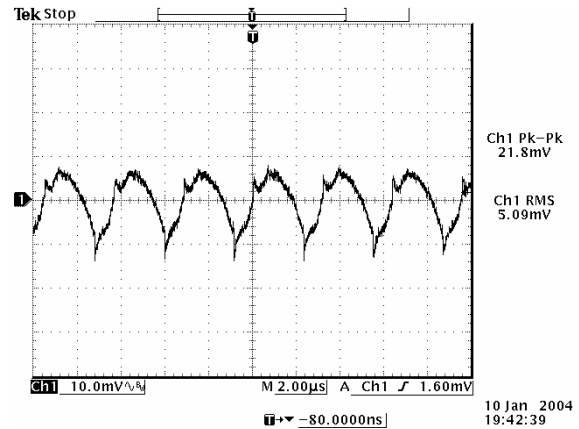


Vin=5.0 V, Vo=1.2 V

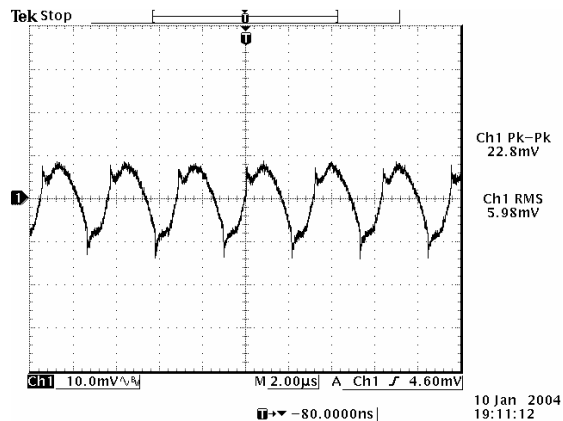


Vin=5.0 V, Vo=1.5 V

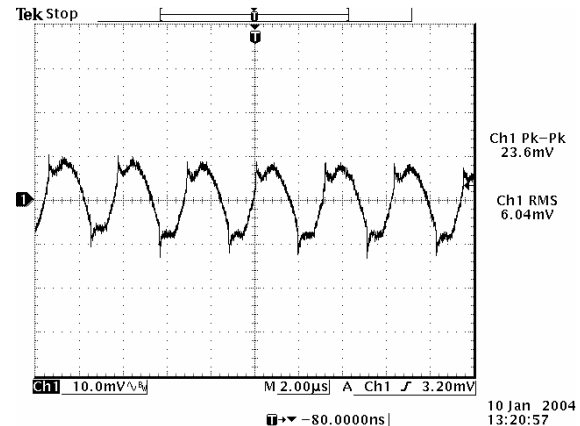

Vin=5.0 V, Vo=1.8 V

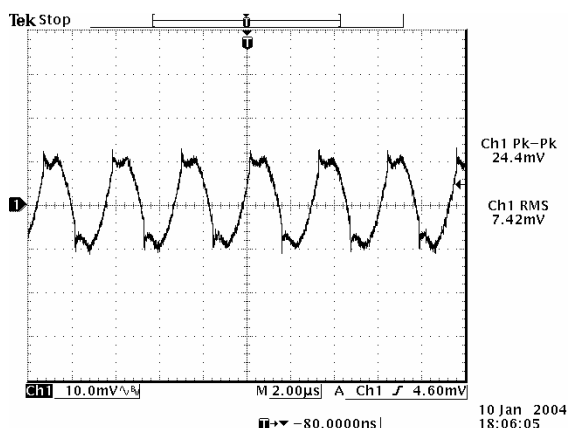

Vin=5.0 V, Vo=2.5 V

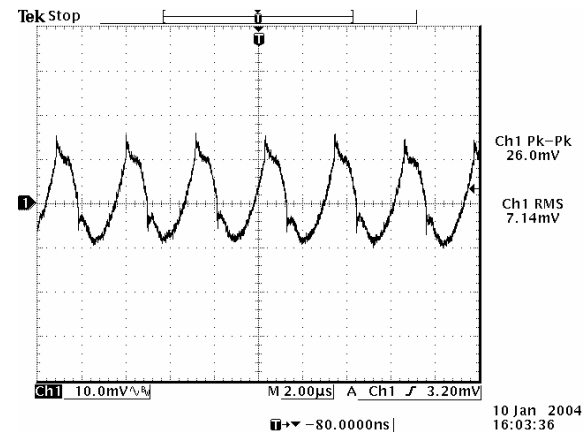

Vin=5.0 V, Vo=3.3 V


Note: Ripple and noise is tested at 0-20 MHz BW, 10 μ F/16 V tantalum capacitor and 1 μ F/10 V ceramic capacitor, full load, and Ta=25 deg C.

NON-ISOLATED DC/DC CONVERTERS


2.4 V - 5.5 V Input 0.75 V - 3.63 V/16 A Output




Transient Response Waveforms

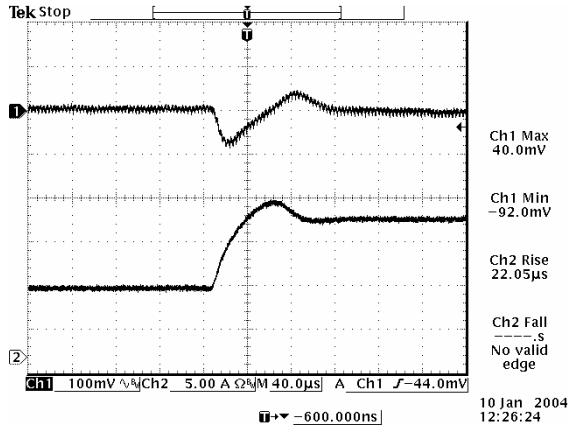


50% to 100% load step at $V_{in}=5$ V, $V_o=0.75$ V

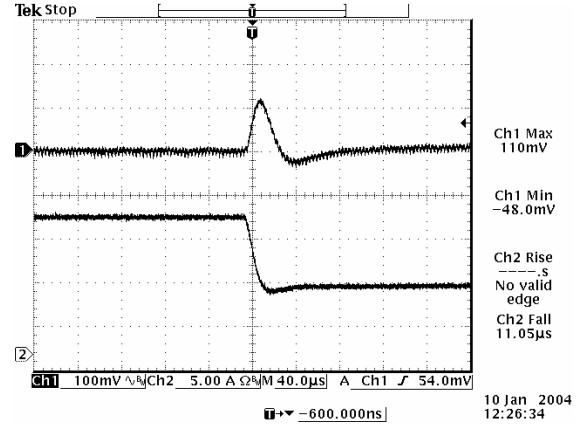


100% to 50% load step at $V_{in}=5$ V, $V_o=0.75$ V

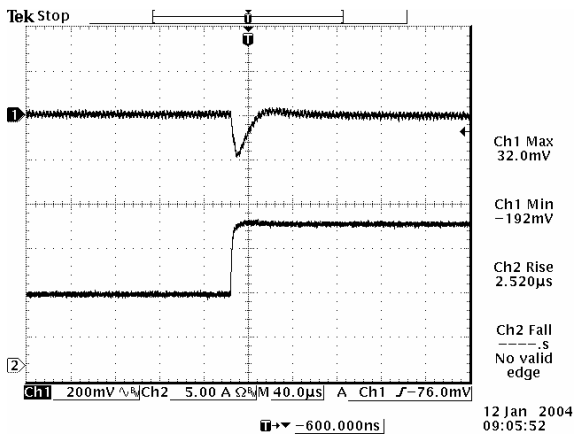


50% to 100% load step at $V_{in}=5$ V, $V_o=1.2$ V

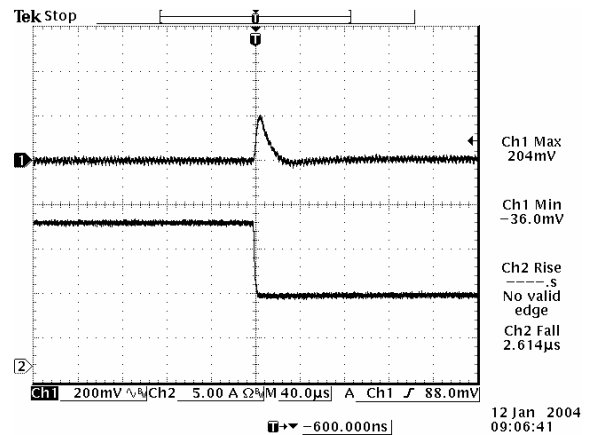

100% to 50% load step at $V_{in}=5$ V, $V_o=1.2$ V

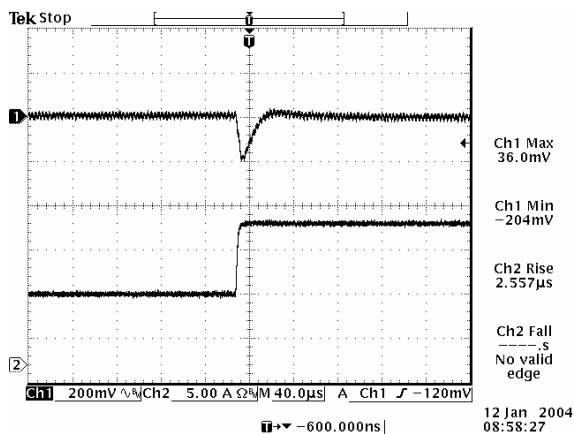

50% to 100% load step at $V_{in}=5$ V, $V_o=1.5$ V

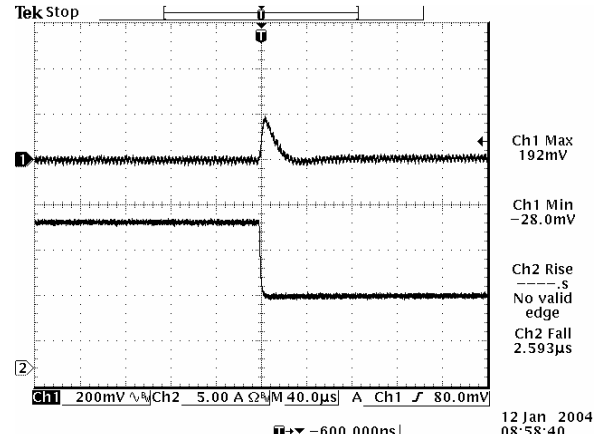


100% to 50% load step at $V_{in}=5$ V, $V_o=1.5$ V

NON-ISOLATED DC/DC CONVERTERS


2.4 V - 5.5 V Input 0.75 V - 3.63 V/16 A Output




Transient Response Waveforms (continued)

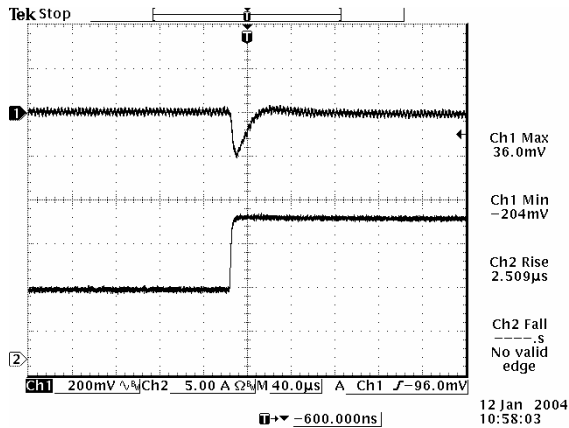


50% to 100% load step at $V_{in}=5$ V, $V_o=1.8$ V

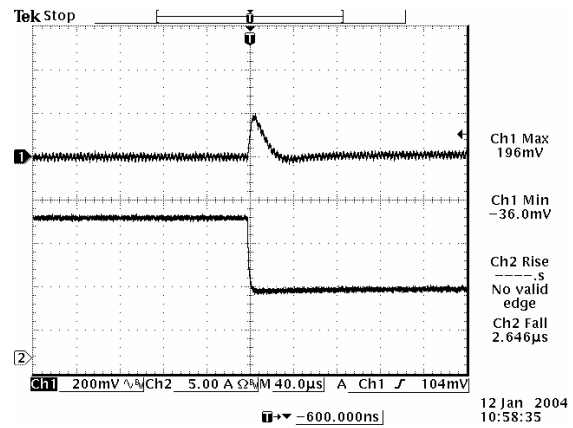


100% to 50% load step at $V_{in}=5$ V, $V_o=1.8$ V

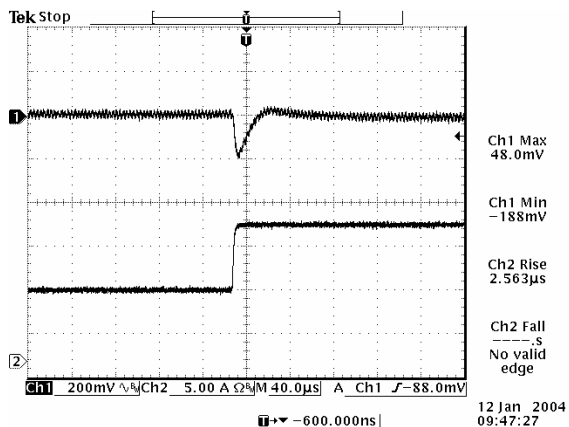


50% to 100% load step at $V_{in}=5$ V, $V_o=2.5$ V

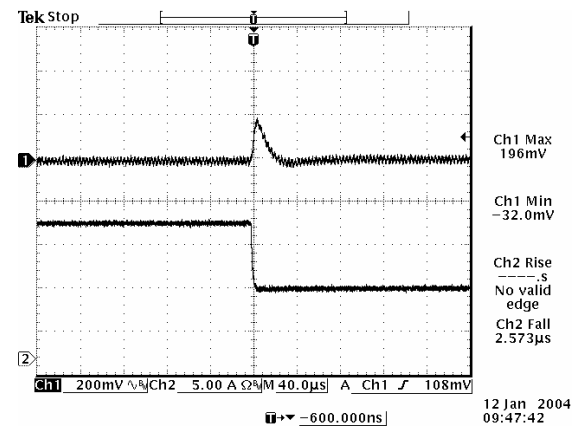

100% to 50% load step at $V_{in}=5$ V, $V_o=2.5$ V

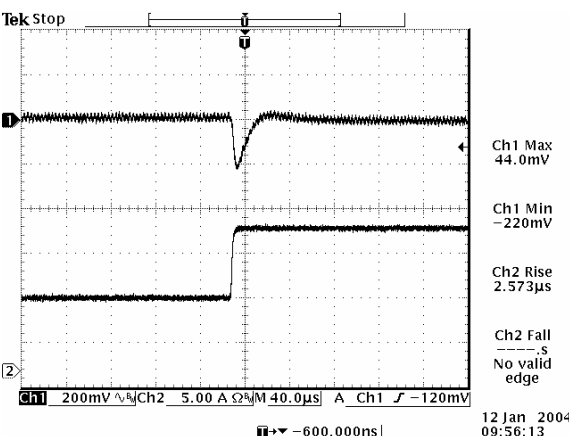

50% to 100% load step at $V_{in}=5$ V, $V_o=3.3$ V

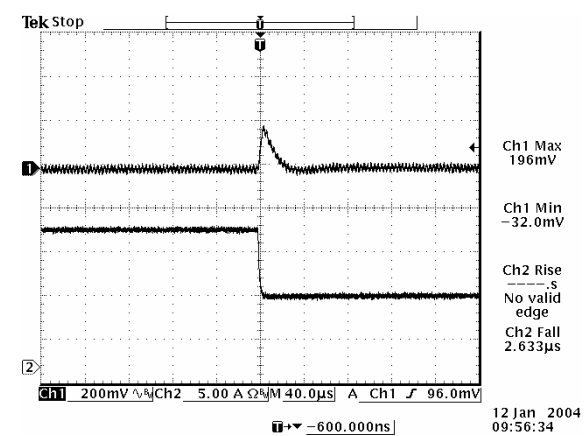

100% to 50% load step at $V_{in}=5$ V, $V_o=3.3$ V



Note: Transient response is tested at $di/dt=2.5$ A/µs, with two 150 µF/10 V tantalum capacitors and 1µF/10 V ceramic capacitor, $T_a=25$ deg C.

NON-ISOLATED DC/DC CONVERTERS


2.4 V - 5.5 V Input 0.75 V - 3.63 V/16 A Output



Mechanical Outline

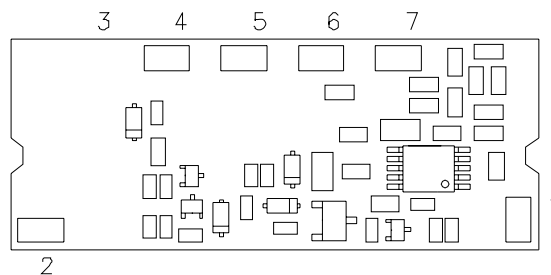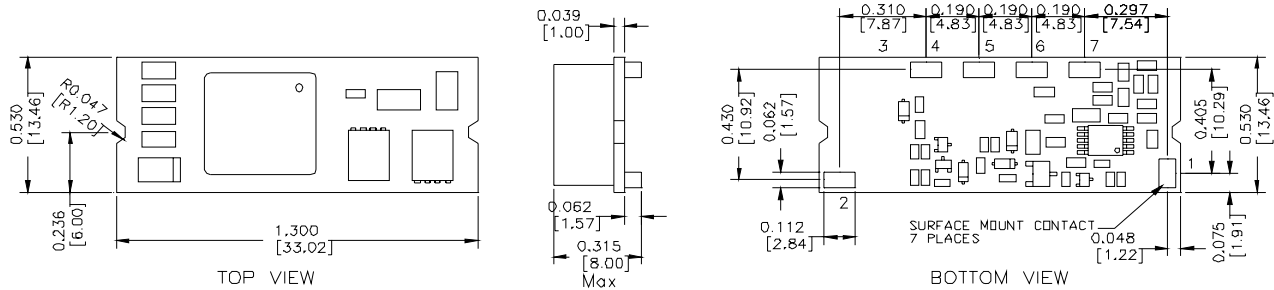

RECOMMENDED PAD LAYOUT

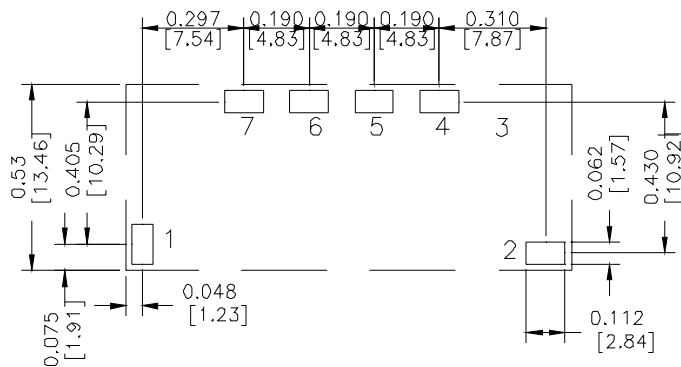

Pin Connections

Pin	Function
1	Remote On/Off
2	Vin
3	N/A
4	Ground
5	Vout
6	Trim
7	Remote Sense

PAD SIZE:

MIN: 0.14" * 0.095" (3.56mm * 2.41mm)
MAX: 0.165" * 0.11" (4.19mm * 2.79mm)

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2006 Bel Fuse Inc. Specifications subject to change without notice. 032006

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com