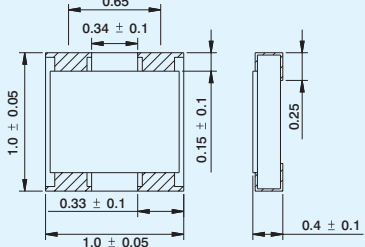




Isolated Resistor Network (4P2R-0402x2)

Specifications

<p>Physical Dimension (mm)</p>	<p>Flat type (0404)/(1010)</p> 
<p>Schematic Diagram</p>	
<p>Power Rating</p>	<p>63mW/element</p>
<p>Resistance Range</p>	<p>0Ω, 10Ω ~ 1MΩ</p>
<p>Resistance Tolerance</p>	<p>±1%, ±5%</p>
<p>Resistance Value</p>	<p>E-24</p>
<p>Operation Voltage</p>	<p>25 V max.</p>
<p>Standard Package</p>	<p>10,000 pcs/reel</p>

Performance Data

Maximum Rated Operating Temperature	+70°C
Maximum Operating Temperature	+125°C
Short-time Overload	±2%
Loading Life	±3%
Moisture Life	±3%
Temperature Cycle	±1%
Resistance to Soldering Heat	±1%



How to order:

RS2N	1002	J	2
↓	↓	↓	↓
Parts Code	Resistance Value	Tolerance	Electrode type
	1002 = 100 X 10 ² Ω	F : ±1.0%	2 : Flat Type
	33R0 = 33 X 10 ⁰ Ω	J : ±5.0%	