
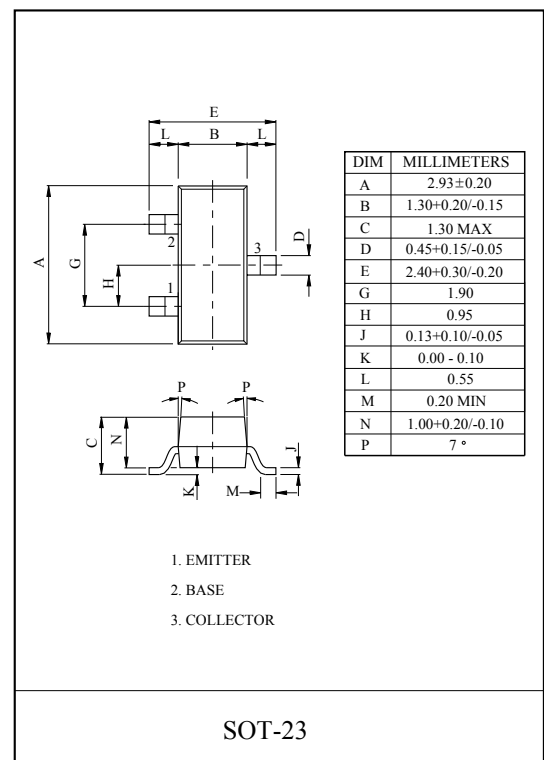


SWITCHING APPLICATION.  
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

### FEATURES

- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.

### EQUIVALENT CIRCUIT



### MAXIMUM RATING (Ta=25℃)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	50	V
Collector-Emitter Voltage	$V_{CEO}$	50	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	100	mA

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector Power Dissipation	$P_C$	200	mW
Junction Temperature	$T_j$	150	℃
Storage Temperature Range	$T_{stg}$	-55 ~ 150	℃

### ELECTRICAL CHARACTERISTICS (Ta=25℃)


CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		$I_{CBO}$	$V_{CB}=50V, I_E=0$	-	-	100	nA
Emitter Cut-off Current		$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	100	nA
DC Current Gain		$h_{FE}$	$V_{CE}=5V, I_C=1mA$	120	-	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=10mA, I_B=0.5mA$	-	0.1	0.3	V
Transition Frequency		$f_T^*$	$V_{CE}=10V, I_C=5mA$	-	250	-	MHz
Input Resistor	KRC110S	$R_1$		-	4.7	-	kΩ
	KRC111S			-	10	-	
	KRC112S			-	100	-	
	KRC113S			-	22	-	
	KRC114S			-	47	-	

Note : \* Characteristic of Transistor Only.

### MARK SPEC

TYPE	KRC110S	KRC111S	KRC112S	KRC113S	KRC114S
MARK	NK	NM	NN	NO	NP

### Marking

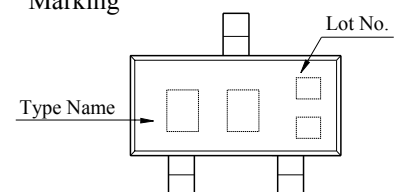


# KRC110S~KRC114S

## ELECTRICAL CHARACTERISTICS (Ta=25℃)


CHARACTERISTIC			SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRC110S	$t_r$	$V_O=5V$ $V_{IN}=5V$ $R_L=1k\Omega$	-	0.025	-	$\mu S$
		KRC111S			-	0.03	-	
		KRC112S			-	0.3	-	
		KRC113S			-	0.06	-	
		KRC114S			-	0.11	-	
	Storage Time	KRC110S	$t_{stg}$		-	3.0	-	
		KRC111S			-	2.0	-	
		KRC112S			-	6.0	-	
		KRC113S			-	4.0	-	
		KRC114S			-	5.0	-	
	Fall Time	KRC110S	$t_f$		-	0.2	-	
		KRC111S			-	0.12	-	
		KRC112S			-	2.0	-	
		KRC113S			-	0.9	-	
		KRC114S			-	1.4	-	

# KRC110S~KRC114S


$h_{FE} - I_C$

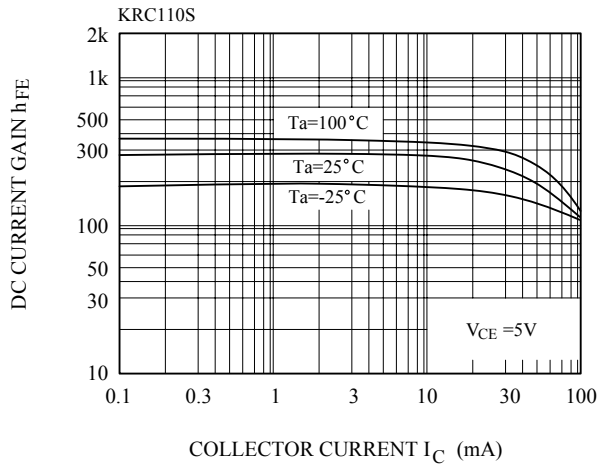


$V_{CE(sat)} - I_C$

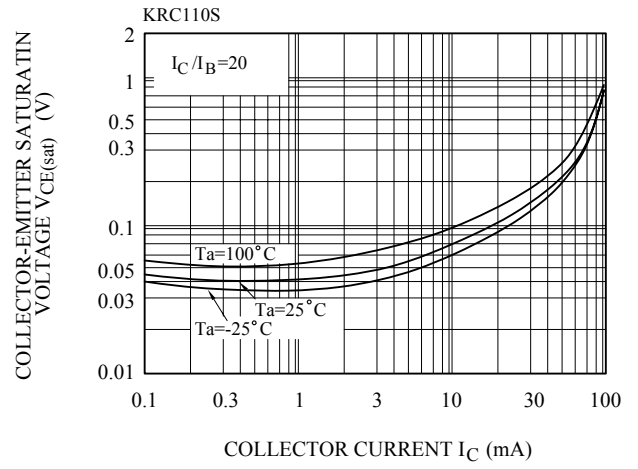


$h_{FE} - I_C$

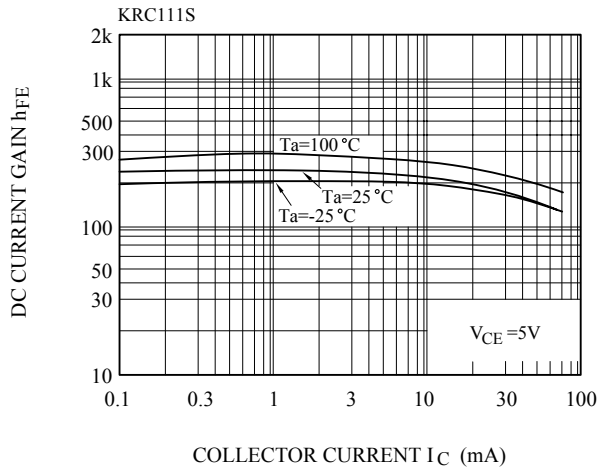


$V_{CE(sat)} - I_C$

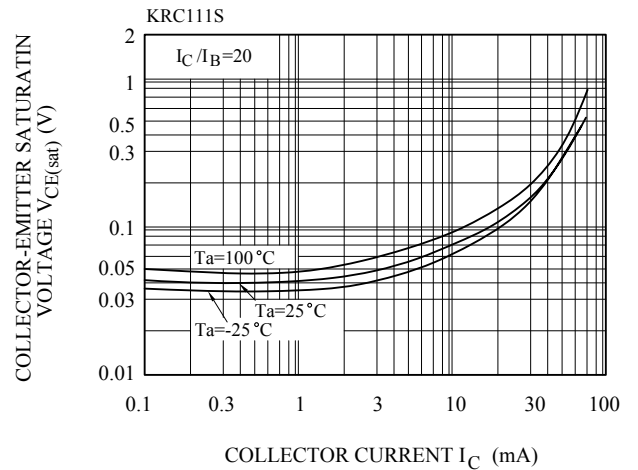

$h_{FE} - I_C$

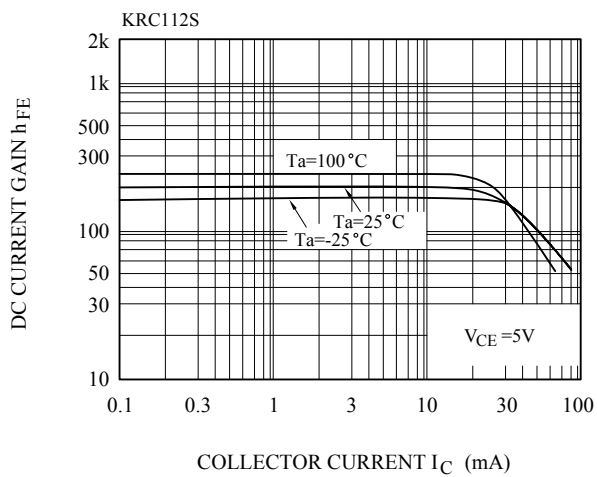


$V_{CE(sat)} - I_C$

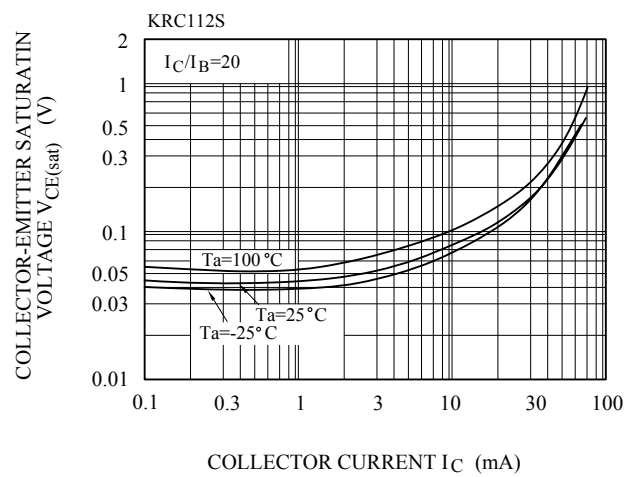


# KRC110S~KRC114S


$h_{FE} - I_C$

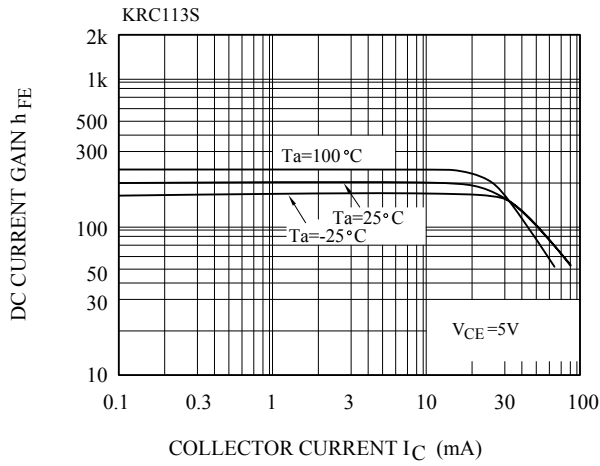

$V_{CE(sat)} - I_C$

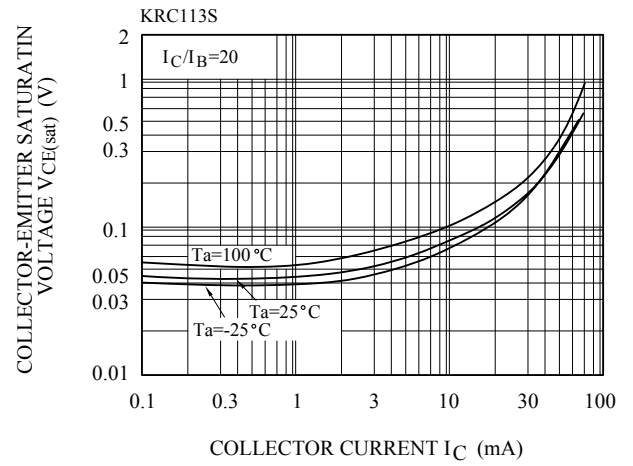

$h_{FE} - I_C$

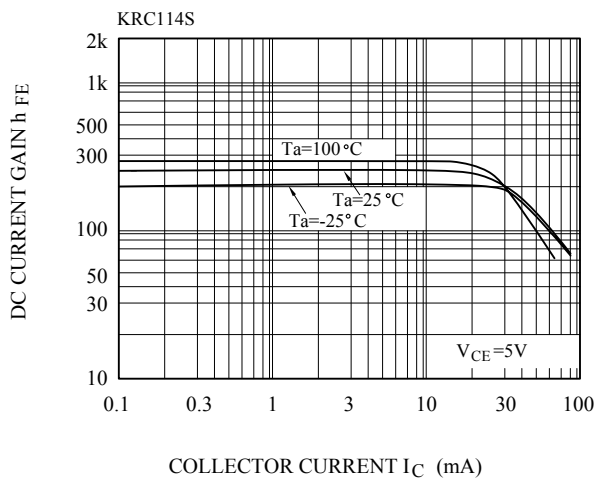

$V_{CE(sat)} - I_C$

