


SWITCHING APPLICATION.  
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION

### FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.

### EQUIVALENT CIRCUIT

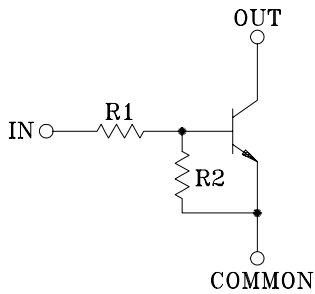

### BIAS RESISTOR VALUES

TYPE NO.	R1(k $\Omega$ )	R2(k $\Omega$ )
KRC116S	1	10
KRC117S	2.2	2.2
KRC118S	2.2	10
KRC119S	4.7	10
KRC120S	10	4.7
KRC121S	47	10
KRC122S	100	100

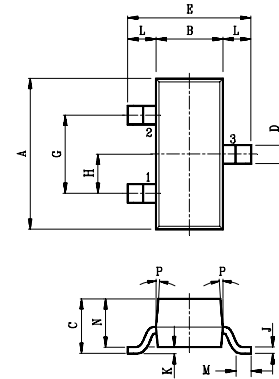

DIM	MILLIMETERS
A	2.93±0.20
B	1.30+0.20/-0.15
C	1.30 MAX
D	0.45+0.15/-0.05
E	2.40+0.30/-0.20
G	1.90
H	0.95
J	0.13+0.10/-0.05
K	0.00 - 0.10
L	0.55
M	0.20 MIN
N	1.00+0.20/-0.10
P	0.7

SOT-23


### MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT			
Output Voltage	KRC116S ~ 122S	V <sub>O</sub>	50	V			
	KRC116S		10, -5				
	KRC117S		12, -10				
	KRC118S		12, -5				
	KRC119S		20, -7				
	KRC120S		30, -10				
	KRC121S		40, -15				
	Input Voltage		KRC122S		V <sub>I</sub>	40, -10	V
	Output Current				I <sub>O</sub>	100	mA
Power Dissipation	P <sub>D</sub>	200		mW			
Junction Temperature	T <sub>i</sub>	150		℃			
Storage Temperature Range	KRC116S ~ 122S	T <sub>stg</sub>		-55 ~ 150	℃		

### MARK SPEC

TYPE	KRC116S	KRC117S	KRC118S	KRC119S	KRC120S	KRC121S	KRC122S
MARK	N2	N4	N5	N6	N7	N8	N9

### Marking

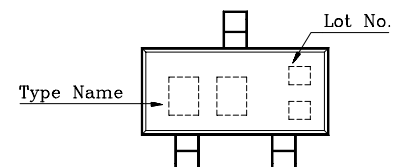

# KRC116S ~ KRC122S

## ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC116S ~ 122S	$I_{O(OFF)}$	$V_O=50V, V_I=0$	-	-	500	nA
DC Current Gain	KRC116S	$G_I$	$V_O=5V, I_O=5mA$	33	-	-	
	KRC117S		$V_O=5V, I_O=20mA$	20	-	-	
	KRC118S		$V_O=5V, I_O=10mA$	33	-	-	
	KRC119S		$V_O=5V, I_O=10mA$	30	-	-	
	KRC120S		$V_O=5V, I_O=10mA$	24	-	-	
	KRC121S		$V_O=5V, I_O=5mA$	33	-	-	
	KRC122S		$V_O=5V, I_O=5mA$	62	-	-	
Output Voltage	KRC116S	$V_{O(ON)}$	$I_O=10mA, I_I=0.5mA$	-	-	0.3	V
	KRC117S		$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	
	KRC118S		$I_O=10mA, I_I=0.5mA$	-	-	0.3	
	KRC119S		$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	
	KRC120S		$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	
	KRC121S		$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	
	KRC122S		$I_O=5mA, I_I=0.25mA$	-	0.1	0.3	
Input Voltage (ON)	KRC116S	$V_{I(ON)}$	$V_O=0.3V, I_O=-20mA$	-	0.98	3	V
	KRC117S		$V_O=0.3V, I_O=-20mA$	-	1.83	3	
	KRC118S		$V_O=0.3V, I_O=-20mA$	-	1.22	3	
	KRC119S		$V_O=0.3V, I_O=-20mA$	-	1.76	2.5	
	KRC120S		$V_O=0.3V, I_O=-2mA$	-	2	3	
	KRC121S		$V_O=0.3V, I_O=-2mA$	-	3.9	5	
	KRC122S		$V_O=0.3V, I_O=-1mA$	-	1.64	3	
Input Voltage (OFF)	KRC116S	$V_{I(OFF)}$	$V_{CC}=5V, I_O=100\mu A$	0.3	0.63	-	V
	KRC117S			0.5	1.15	-	
	KRC118S			0.3	0.67	-	
	KRC119S			0.3	0.82	-	
	KRC120S			0.8	1.68	-	
	KRC121S			1	3.09	-	
	KRC122S			0.5	1.17	-	
Transition Frequency	KRC116S ~ 122S	$f_T^*$	$V_O=10V, I_O=5mA$	-	250	-	MHz
Input Current	KRC116S	$I_I$	$V_I=-5V$	-	-	7.2	mA
	KRC117S			-	-	3.8	
	KRC118S			-	-	3.8	
	KRC119S			-	-	1.8	
	KRC120S			-	-	0.88	
	KRC121S			-	-	0.16	
	KRC122S			-	-	0.15	

Note : \*Characteristic of Transistor Only