


SWITCHING APPLICATION.  
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION


### FEATURES

- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.


### EQUIVALENT CIRCUIT



TYPE NO.	R1(k $\Omega$ )	R2(k $\Omega$ )
KRC666U	1	10
KRC667U	2.2	2.2
KRC668U	2.2	10
KRC669U	4.7	10
KRC670U	10	4.7
KRC671U	47	10
KRC672U	100	100

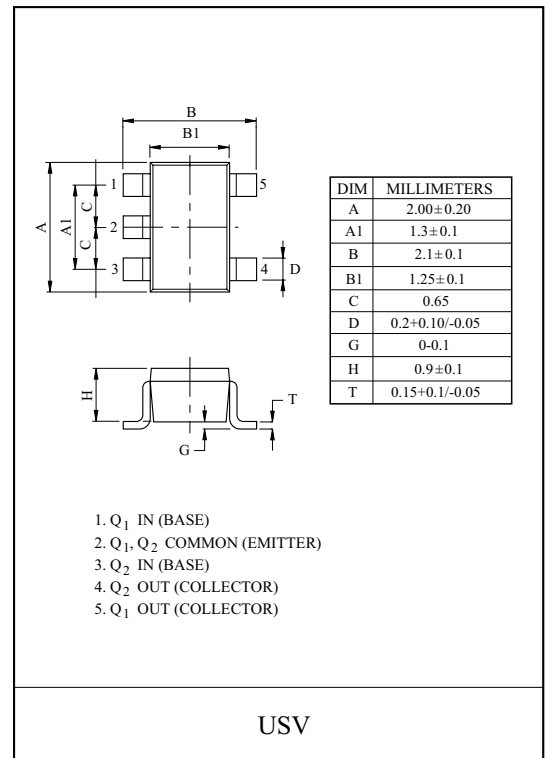

### EQUIVALENT CIRCUIT (TOP VIEW)




### MAXIMUM RATING (Ta=25℃)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC666U~672U	$V_O$	50	V
Input Voltage	KRC666U	$V_I$	10, -5	V
	KRC667U		12, -10	
	KRC668U		12, -5	
	KRC669U		20, -7	
	KRC670U		30, -10	
	KRC671U		40, -15	
	KRC672U		40, -10	
Output Current	KRC666U~672U	$I_O$	100	mA
Power Dissipation		$P_D$ *	200	mW
Junction Temperature		$T_j$	150	℃
Storage Temperature Range		$T_{stg}$	-55 ~ 150	℃

\* Total Rating.

### MARK SPEC

TYPE	KRC666U	KRC667U	KRC668U	KRC669U	KRC670U	KRC671U	KRC672U
MARK	N2	N4	N5	N6	N7	N8	N9









# KRC666U~KRC672U

## ELECTRICAL CHARACTERISTICS (Ta=25 °C)







CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC666U~672U	$I_{O(OFF)}$	$V_O=50V, V_I=0$	-	-	500	nA
DC Current Gain	KRC666U	$G_I$	$V_O=5V, I_O=5mA$	33	-	-	
	KRC667U		$V_O=5V, I_O=20mA$	20	-	-	
	KRC668U		$V_O=5V, I_O=10mA$	33	-	-	
	KRC669U		$V_O=5V, I_O=10mA$	30	-	-	
	KRC670U		$V_O=5V, I_O=10mA$	24	-	-	
	KRC671U		$V_O=5V, I_O=5mA$	33	-	-	
	KRC672U		$V_O=5V, I_O=5mA$	62	-	-	
Output Voltage	KRC666U	$V_{O(ON)}$	$I_O=10mA, I_I=0.5mA$	-	-	0.3	V
	KRC667U		$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	
	KRC668U		$I_O=10mA, I_I=0.5mA$	-	-	0.3	
	KRC669U		$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	
	KRC670U		$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	
	KRC671U		$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	
	KRC672U		$I_O=5mA, I_I=0.25mA$	-	0.1	0.3	
Input Voltage (ON)	KRC666U	$V_{I(ON)}$	$V_O=0.3V, I_O=20mA$	-	0.98	3	V
	KRC667U		$V_O=0.3V, I_O=20mA$	-	1.83	3	
	KRC668U		$V_O=0.3V, I_O=20mA$	-	1.22	3	
	KRC669U		$V_O=0.3V, I_O=20mA$	-	1.76	2.5	
	KRC670U		$V_O=0.3V, I_O=2mA$	-	2	3	
	KRC671U		$V_O=0.3V, I_O=2mA$	-	3.9	5	
	KRC672U		$V_O=0.3V, I_O=1mA$	-	1.64	3	
Input Voltage (OFF)	KRC666U	$V_{I(OFF)}$	$V_{CC}=5V, I_O=100\mu A$	0.3	0.63	-	V
	KRC667U			0.5	1.15	-	
	KRC668U			0.3	0.67	-	
	KRC669U			0.3	0.82	-	
	KRC670U			0.8	1.68	-	
	KRC671U			1	3.09	-	
	KRC672U			0.5	1.17	-	
Transition Frequency	KRC666U~672U	$f_T^*$	$V_O=10V, I_O=5mA$	-	250	-	MHz
Input Current	KRC666U	$I_I$	$V_I=5V$	-	-	7.2	mA
	KRC667U			-	-	3.8	
	KRC668U			-	-	3.8	
	KRC669U			-	-	1.8	
	KRC670U			-	-	0.88	
	KRC671U			-	-	0.16	
	KRC672U			-	-	0.15	

Note : \* Characteristic of Transistor Only.







# KRC666U~KRC672U

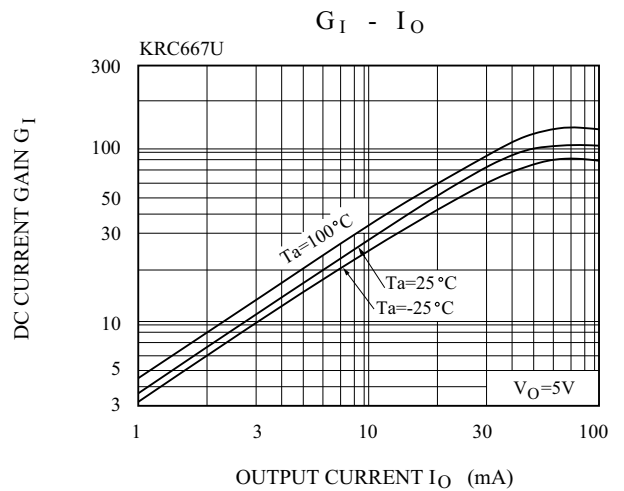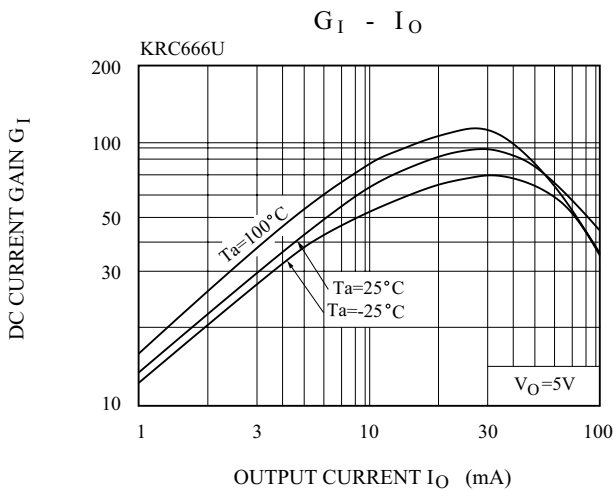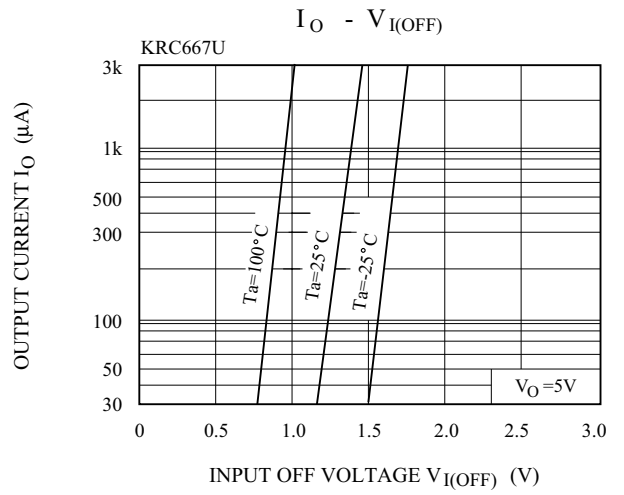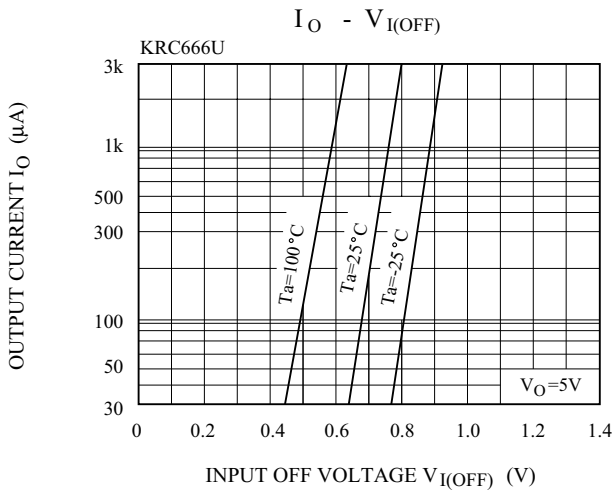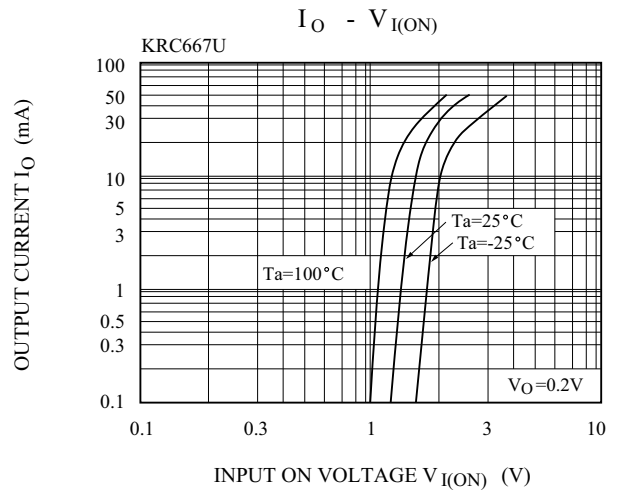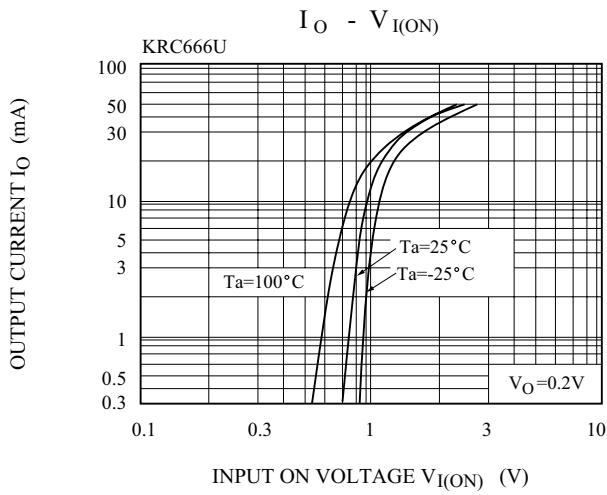

# KRC666U~KRC672U

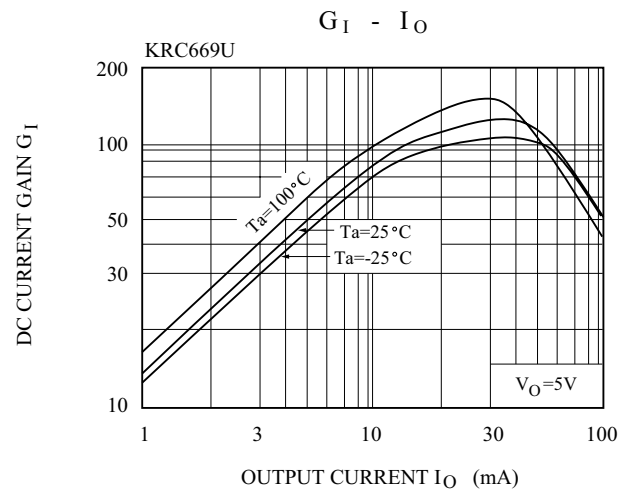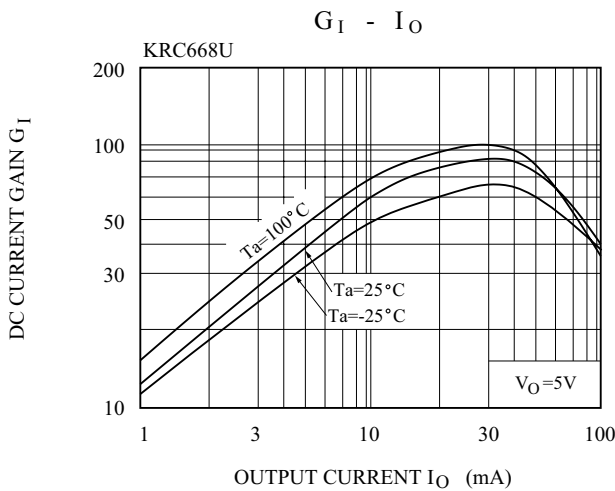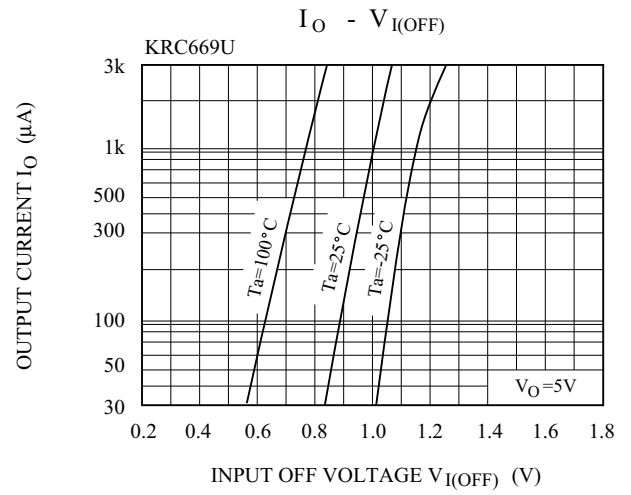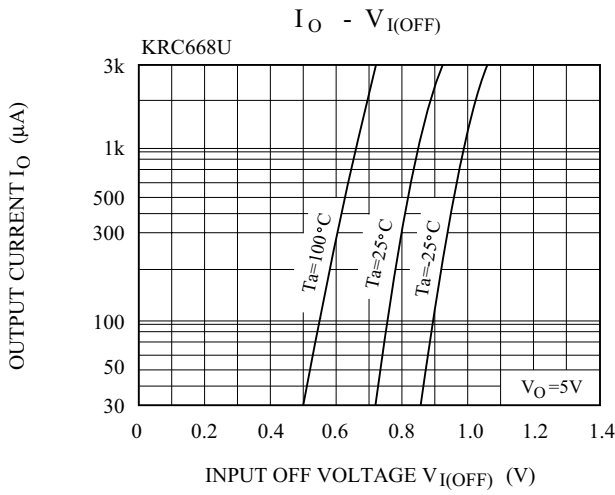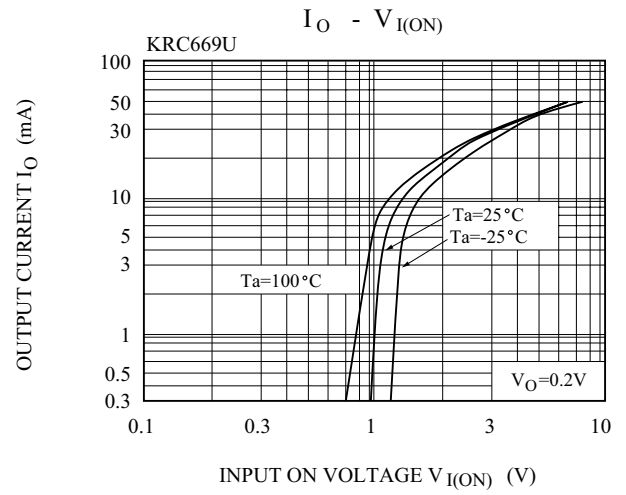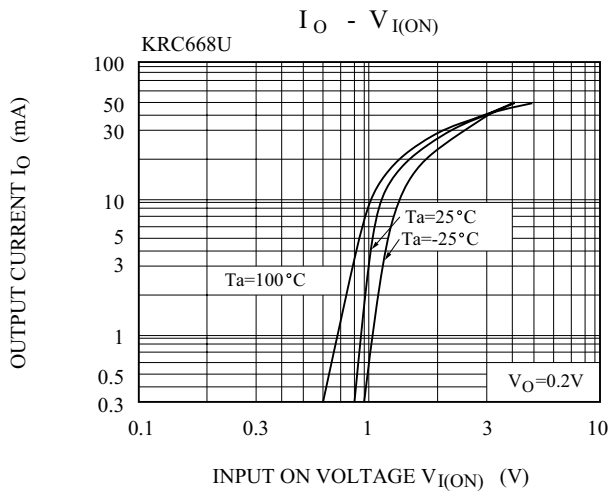

# KRC666U~KRC672U

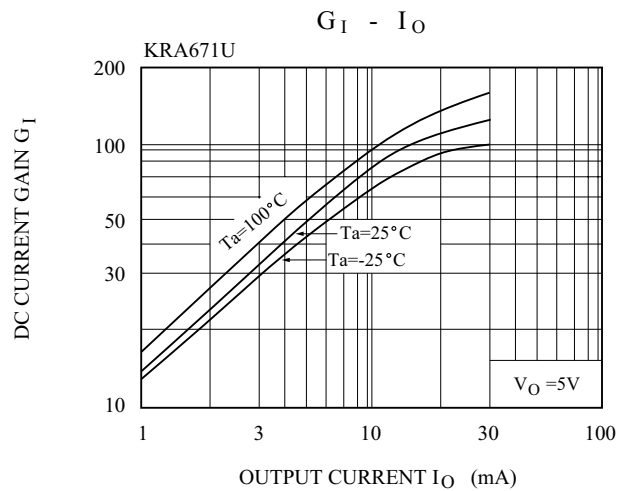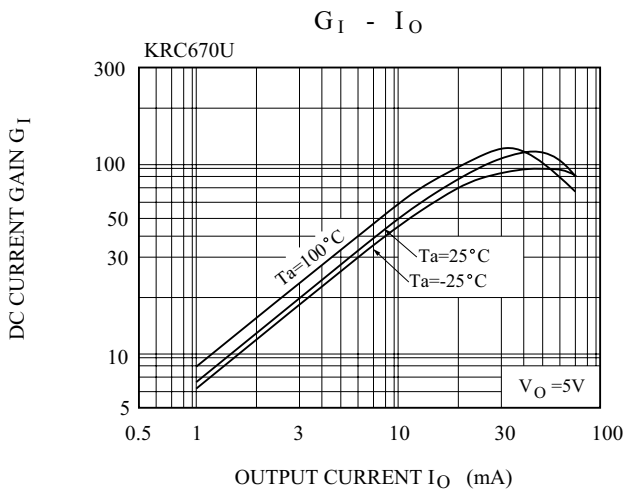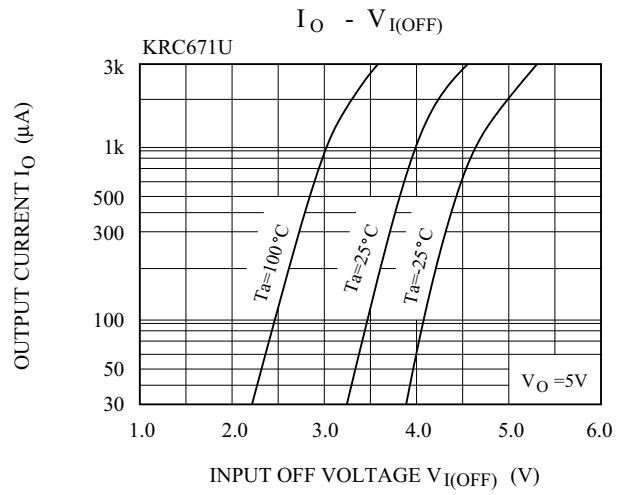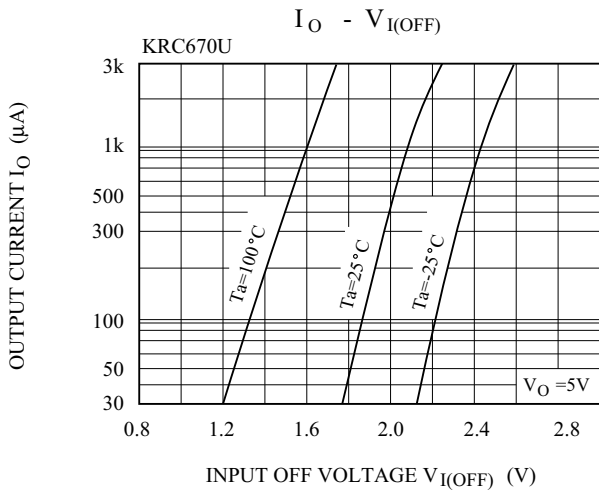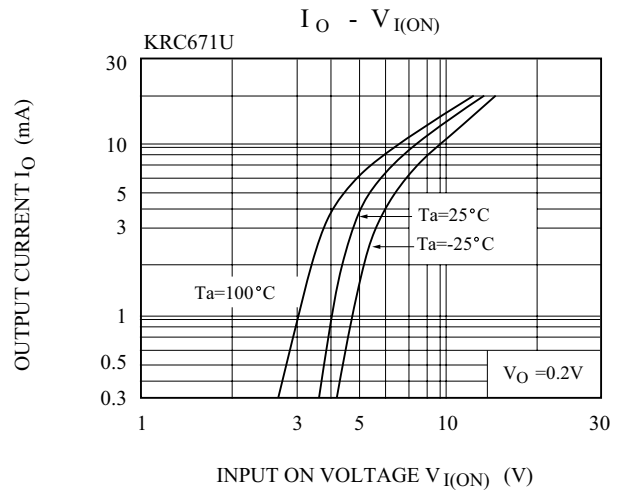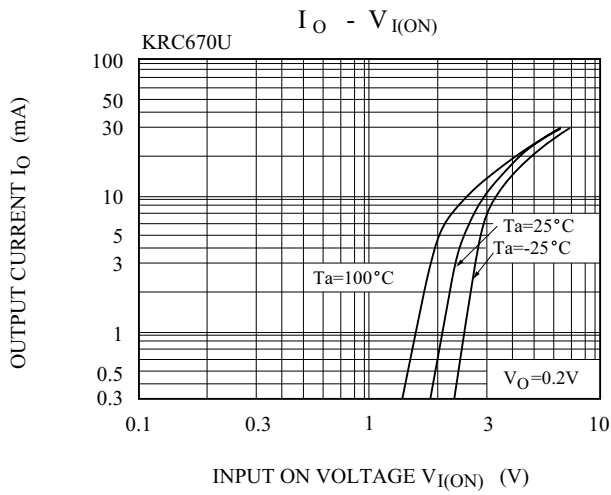

# KRC666U~KRC672U

