

# FKBL400 - FKBL410

**PRV : 50 - 1000 Volts**  
**Io : 2.0 Amperes**


## FEATURES :

- \* High case dielectric strength of 2000 V<sub>DC</sub>
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Fast switching for high efficiency
- \* Ideal for printed circuit board

## MECHANICAL DATA :

- \* Case : Reliable low cost construction utilizing molded plastic technique
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL - STD 202 , Method 208 guaranteed
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Any
- \* Weight : 5.15 grams

# FAST RECOVERY BRIDGE RECTIFIERS

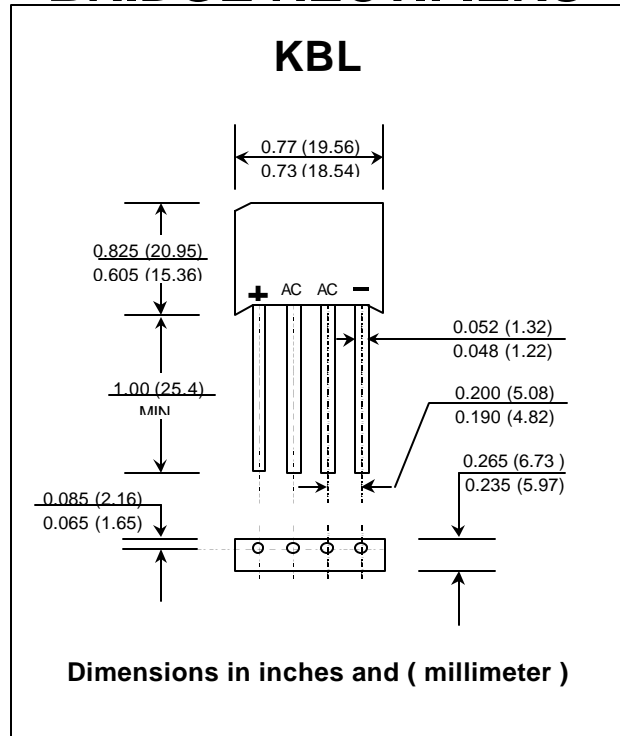

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

RATING	SYMBOL	FKBL	FKBL	FKBL	FKBL	FKBL	FKBL	FKBL	UNIT
		400	401	402	404	406	408	410	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Current    T <sub>c</sub> = 50 °C	I <sub>F(AV)</sub>	4.0							Amps.
Peak Forward Surge Current Single half sine wave Superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	150							Amps.
Rating for fusing ( t < 8.3 ms. )	I <sup>2</sup> t	166							A <sup>2</sup> S
Maximum Forward Voltage drop per Diode at I <sub>F</sub> = 4.0 Amps.	V <sub>F</sub>	1.4							Volts
Maximum DC Reverse Current    T <sub>a</sub> = 25 °C at Rated DC Blocking Voltage    T <sub>a</sub> = 100 °C	I <sub>R</sub>	10							μA
	I <sub>R(H)</sub>	1.0							mA
Maximum Reverse Recovery Time (Note 1)	T <sub>rr</sub>	150				250	500		ns
Typical Thermal Resistance per Diode (Note 2)	R <sub>θJC</sub>	3.3							°C/W
Operating Junction Temperature Range	T <sub>J</sub>	- 50 to + 150							°C
Storage Temperature Range	T <sub>STG</sub>	- 50 to + 150							°C


### Notes :

- 1 ) Measured with I<sub>F</sub> = 0.5 Amp., I<sub>R</sub> = 1 Amp., I<sub>rr</sub> = 0.25 Amp.
- 2 ) Thermal resistance from Junction to case with mounted on a 2.0" X 1.6" X 0.3" ( 5 cm. x 4 cm. x 0.8cm ) Al. Plate.


**UPDATE : APRIL 21, 1998**

## RATING AND CHARACTERISTIC CURVES ( FKBL400 - FKBL410 )


**FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM**

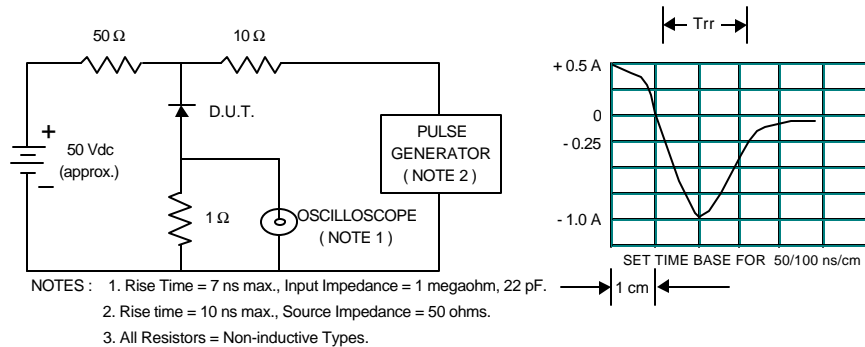


**FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

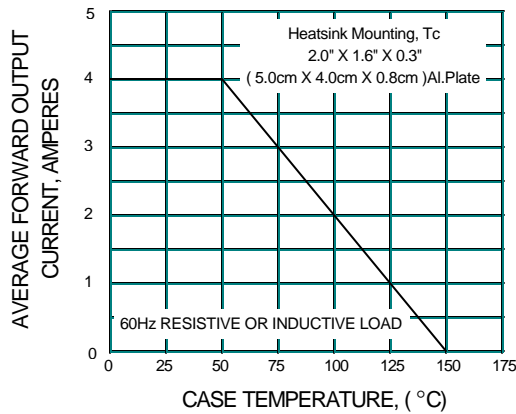

**FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

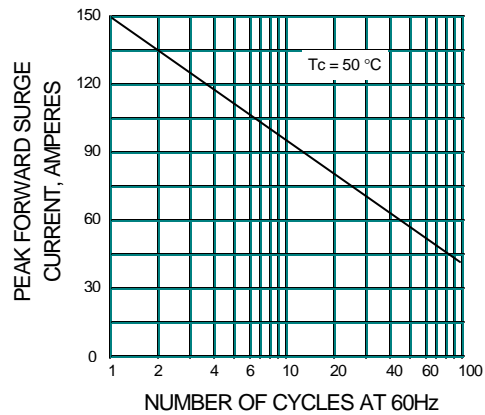

**FIG.4 - TYPICAL FORWARD CHARACTERISTICS PER DIODE**

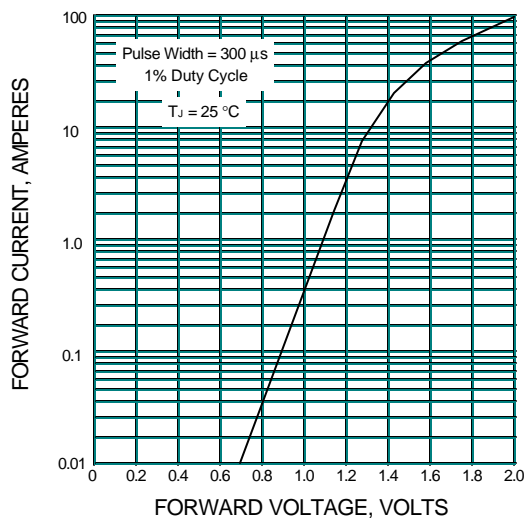

**FIG.5 - TYPICAL REVERSE CHARACTERISTICS PER DIODE**

