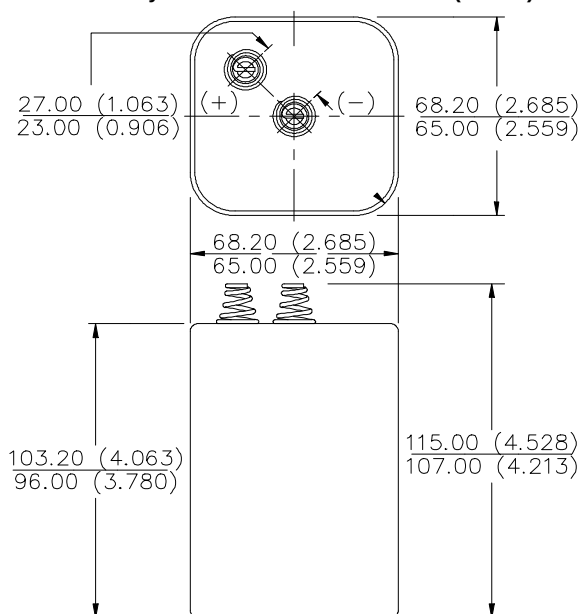


ENERGIZER NO. EN529

6V

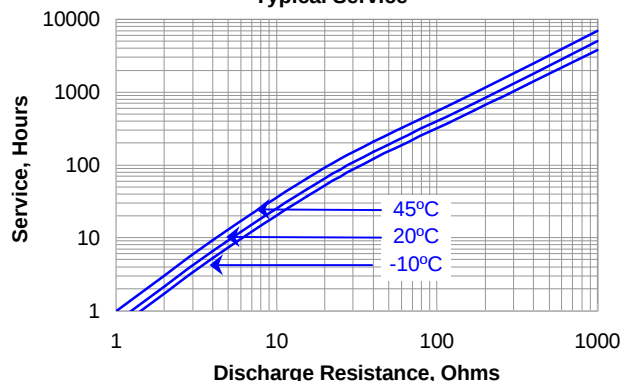
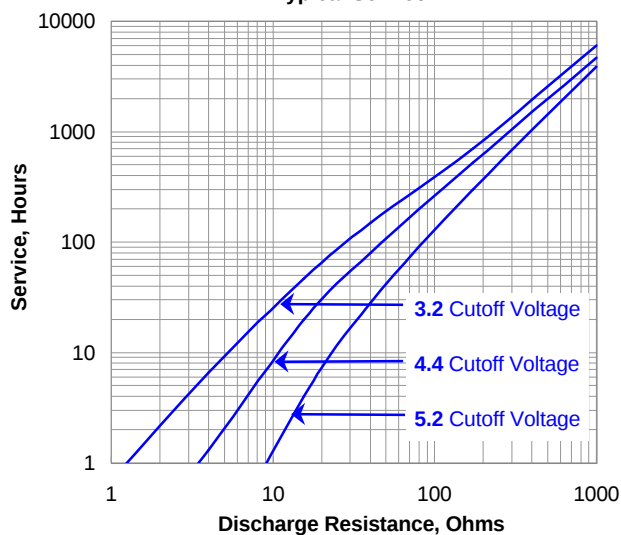
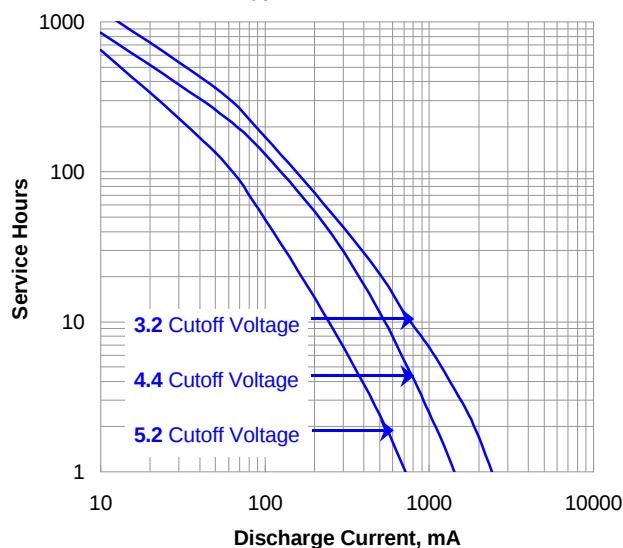

Industry Standard Dimensions in mm (inches)



THIS BATTERY SHALL PASS FREELY THROUGH A CYLINDRICAL TUBE 82.6 DIAMETER X 101.6 LONG.

NOT INTENDED FOR RETAIL TRADE

Chemical System:	Alkaline Zinc-Manganese Dioxide (Zn/MnO ₂) (No Added Mercury or Cadmium)
Designation:	ANSI-908A
Battery Voltage:	6.0 Volts
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Average Capacity:	18,000 mAh (to 0.8 volts/cell) (Rated capacity at 25 mA continuous drain.)
Average Weight:	665 grams (23.5 oz.)
Volume:	440.4 cubic centimeters (26.9 cubic inch)
Cell:	Four No. 3-350 in series
Jacket:	Metal
Terminal:	Coil Spring

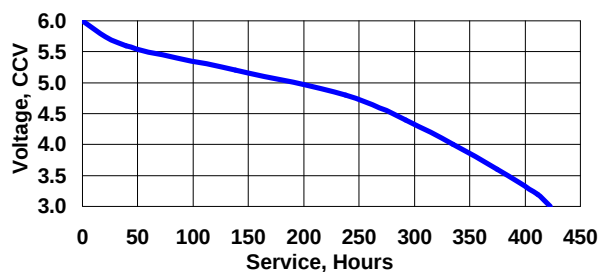
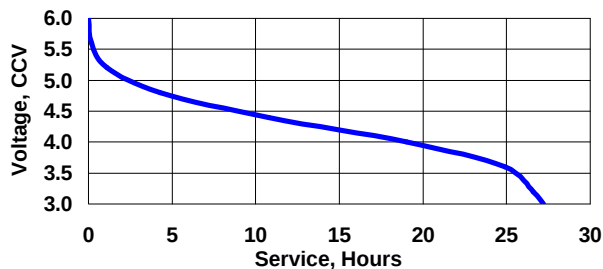
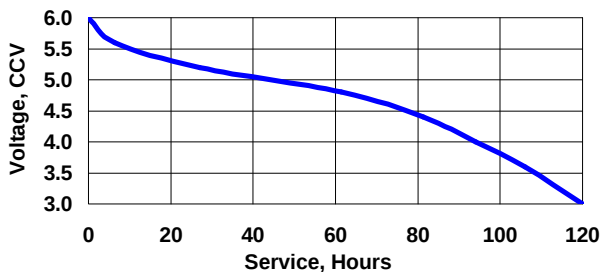
TEMPERATURE EFFECTS
Typical Service

CONSTANT RESISTANCE PERFORMANCE
Typical Service

CONSTANT CURRENT DISCHARGE
Typical Service


Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved

ENERGIZER NO. EN529**ANSI - IEC Industry Standard Tests @ 20° C****Steady Burn Barricade
110 ohms 12 hours/day****Portable Lighting
9.1 ohms 30 min/hour - 8 hours/day****Portable Lighting
33 ohms 30 min/hour - 8 hours/day****Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved