

**MSK**

M.S.KENNEDY CORP.



**DUAL HIGH VOLTAGE/  
HIGH CURRENT  
OPERATIONAL AMPLIFIER****182/183**

4707 Dey Road Liverpool, N.Y. 13088

(315) 701-6751

**FEATURES:**


- Space Efficient Dual Amplifier
- High Voltage Operation:  
Single Supply: +8V to +60V  
Dual Supply:  $\pm 4V$  to  $\pm 30V$
- High Output Current: 3 Amp Continuous per amplifier
- High Speed:  $10V/\mu S$
- Low Quiescent Current: 20 mA per amplifier Typ.
- Adjustable Current Limits
- Thermal Shutdown
- Monolithic Technology
- Enable/Status Pin For Output Disable Control

**MIL-PRF-38534 CERTIFIED****MSK182****MSK183****DESCRIPTION:**


The MSK 182 and 183 are dual high power monolithic operational amplifiers ideal for use with a wide variety of loads. With operation from either single or dual supplies, they offer excellent design flexibility. Power dissipation is kept to a minimum with a quiescent current rating of only 20mA per amplifier, while 3 Amps of continuous available output current makes the MSK 182 or MSK 183 a very good low cost choice for motor drive circuits and audio amplification. The design is internally protected against current overloads and overtemperature conditions. Current limit can also be user-selected through the use of a resistor/potentiometer or voltage out/current out DAC. The MSK 182 is packaged in a hermetically sealed 14 pin power DIP with bolt down tabs for applications that require heat sinking. The MSK 183 is packaged in a low cost ceramic SIP.

**EQUIVALENT SCHEMATIC**

MSK182

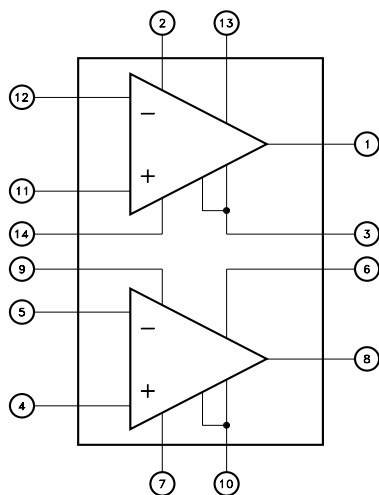

MSK183

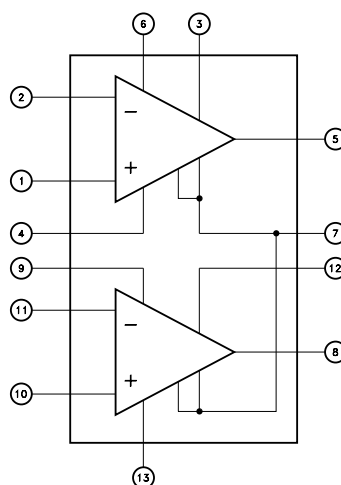**TYPICAL APPLICATIONS**

- Servo Driver
- Actuator Driver
- Audio Amplifier
- Power Supplies
- Bridge Amps
- Stereo Amps

**PIN-OUT INFORMATION**

1 OUTPUT 1	14 E/S 1	1 +VIN 1	
2 +VCC 1	13 ILIM 1	2 -VIN 1	13 E/S 2
3 -VCC 1	12 -VIN 1	3 ILIM 1	12 ILIM 2
4 +VIN 2	11 +VIN 1	4 E/S 1	11 -VIN 2
5 -VIN 2	10 -VCC 2	5 OUTPUT 1	10 +VIN 2
6 ILIM 2	9 +VCC 2	6 +VCC 1	9 +VCC 2
7 E/S 2	8 OUTPUT 2	7 -VCC 1/2	8 OUTPUT 2

MSK 182 PINOUT

MSK 183 PINOUT

## ABSOLUTE MAXIMUM RATINGS

$V_{CC}$	Total Supply Voltage . . . . .	60V
$\pm I_{OUT}$	Output Current (within S.O.A.) . . . . .	5A
$V_{IND}$	Input Voltage (Differential) . . . . .	$\pm 29.5V$
$V_{IN}$	Input Voltage (Common Mode) . . . . .	$+ 27V/-29V$
$T_J$	Junction Temperature. . . Internal Protection (See Application Note)	

T <sub>ST</sub>	Storage Temperature Range . . . . .	-65°C to +150°C
T <sub>LD</sub>	Lead Temperature Range . . . . . (10 seconds)	300°C
T <sub>C</sub>	Case Operating Temperature (MSK182H/E) . . . . . (MSK182/183) . . . . .	-55°C to +125°C -40°C to +85°C
R <sub>TH</sub>	Thermal Resistance Junction to Case (Per Amplifier)MSK182 Junction to Case (Per Amplifier)MSK183	1.8°C/W 3.0°C/W

## ELECTRICAL SPECIFICATIONS

Parameter	Test Conditions ① ②	Group A	MSK182H/E			MSK182/MSK 183			Units
		Subgroup	Min.	Typ.	Max.	Min.	Typ.	Max.	
STATIC									
Supply Voltage Range ③		-	±4	-	±30	±4	-	±30	V
Quiescent Current (Per Amp)	VIN = 0V	1	-	±17	±20	-	±17	±23	mA
		2,3	-	±17	±20	-	-	-	mA
Quiescent Current (Per Amp)	Shutdown Mode VIN = 0V	-	-	±6	-	-	±6	-	mA
INPUT									
Input Offset Voltage	VIN = 0V	1	-	±2	±10	-	±2	±15	mV
Input Offset Voltage Drift	VIN = 0V	-	-	±30	-	-	±30	-	μV/°C
Input Bias Current ③	VIN = 0V	1	-	±100	±500	-	±100	±750	nA
Input Offset Current ③	VIN = 0V	1	±1	±5	±50	-	±5	±75	nA
Input Impedance	f = DC	-	-	10 <sup>7</sup>	-	-	10 <sup>7</sup>	-	Ω
Input Capacitance	f = DC	-	-	6	-	-	6	-	pF
Common Mode Rejection Ratio ③ (-Vcc)-0.1≤ VIN ≤ (+ Vcc)-3V		1	80	95	-	75	95	-	dB
Input Voltage Noise Density	f = 1KHz	-	-	90	-	-	90	-	nV/√Hz
OUTPUT									
Output Voltage Swing	IOUT = 0.6A ③	4	±27	±28	-	±27	±28	-	V
	IOUT = 3.0A	4	±25.5	±26	-	±25	±26	-	V
Output Current	DC = Continuous	4	±3	-	-	±3	-	-	A
Shutdown Input ③	VE/S High- Output Enabled E/S Open or High	4	-27.5	-	-	-27.5	-	-	V
	VE/S Low- Output Disabled E/S Forced Low	4	-	-	-29	-	-	-29	V
	IE/S High- Output Enabled E/S Open or High	-	-	-65	-	-	-65	-	μA
	IE/S Low- Output Disabled E/S Forced Low	-	-	-70	-	-	-70	-	μA
Output Disable Time		-	-	1	-	-	1	-	μS
Output Enable Time		-	-	3	-	-	3	-	μS
TRANSFER CHARACTERISTICS									
Slew Rate	AV = 1 VOUT = 50Vp-p RL = 8Ω	-	-	10	-	-	8	-	V/μS
Open Loop Voltage Gain ③	VOUT = ±25V RL = 1KΩ	4	90	98	-	88	98	-	dB
Settling Time ±0.1% ③	AV = 10 50V Step	-	-	15	-	-	18	-	μS

### NOTES:

- ① Unless otherwise specified  $\pm V_{CC} = \pm 30VDC$  and E/S pin is open.
- ② All electrical specifications apply to each amplifier.
- ③ Devices shall be capable of meeting the parameter, but need not to be tested. Typical parameters are for reference only.
- ④ Industrial grade and 'E' suffix devices shall be tested to subgroups 1 and 4 unless otherwise specified.
- ⑤ Military grade devices ('H' suffix) shall be 100% tested to subgroups 1,2,3 and 4.
- ⑥ Subgroup 1,4  $T_A = T_C = + 25^{\circ}C$   
Subgroup 2  $T_A = T_C = + 125^{\circ}C$   
Subgroup 3  $T_A = T_C = -55^{\circ}C$

## APPLICATION NOTES

### POWER SUPPLIES:

For the MSK 182/183 maximum total supply voltage is specified as 60V. However, dual and unbalanced power supply operation is permissible as long as total supply voltage does not exceed 60V.

### POWER SUPPLY BYPASSING:

Power supply terminals must be effectively decoupled with a high and low frequency bypass circuit to avoid power supply induced oscillation. An effective decoupling scheme consists of a 0.1 $\mu$ F ceramic capacitor in parallel with a 10 $\mu$ F tantalum capacitor for each power supply pin to ground. In addition, it is recommended that a 0.01 $\mu$ F capacitor be placed between  $\pm V_{CC}$  as close to the MSK 182 as possible.

### CURRENT LIMIT:

The MSK 182 and MSK 183 offer accurate, user-selectable current limit. Unlike typical designs that use a power resistor in series with the output to sense load, the MSK 182 and MSK 183 sense the load indirectly and therefore do not require a resistor to handle the full output current. Current limit is selected by controlling the input to the  $I_{LIM}$  pin.


The easiest method is to use a resistor or potentiometer connected between  $V_{CC}$  and the  $I_{LIM}$  pin. Use the following equation to select proper resistor value:

$$R_{CC} = \frac{71,250}{I_{LIM}} - 13.75K\Omega$$

A low level control signal (0-330 $\mu$ A) can also be used to control the current level digitally. If the pin is left open, the current is programmed to 0A, while connecting  $I_{LIM}$  directly to  $-V_{CC}$  sets the output current to it's maximum, typically 5A.

### SAFE OPERATING AREA:

The safe operating area curve is a graphical representation of the power handling capability of the amplifier under various conditions. Power dissipation of the device is equal to the product of the voltage across the output transistor times the output current. As can be seen in the curve, safe operating current decreases with an increase in temperature as well as an increase in the voltage across the output transistor. Therefore, for maximum amplifier performance it is important to keep case temperature as low as possible and to keep  $\pm V_{CC}$  as close to the output rail as achievable.

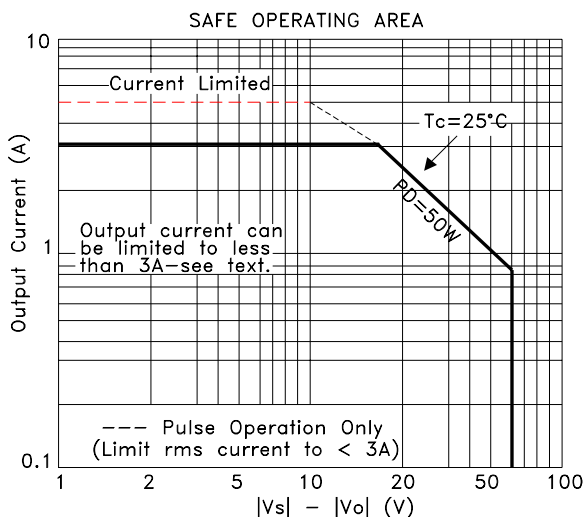

### THERMAL PROTECTION:

The MSK 182 and MSK 183 are equipped with thermal protection circuitry that protects each amplifier from damage caused by excessive junction temperature. The output is disabled when the junction temperature reaches approximately 160°C. After the junction temperature cools to approximately 140°C, the output is again enabled. The thermal protection may cycle on and off depending on the output load and signal conditions; this may have an undesirable effect on the load.

It should be noted that even though this internal protection circuitry does protect against overload conditions, it does not take the place of proper heat sinking. For reliable operation, junction temperature should be limited to 150°C, maximum.

### ENABLE/STATUS PIN:


This pin actually has a dual function. First, when the pin is forced low, the output stage is disabled. Second, it can be monitored to determine if the device is in thermal shutdown. These functions can be used on the same device with either single or dual supplies. For normal operation, the E/S pin must be left open or pulled at least 2.4 volts above the negative rail. In noisy applications, a small value capacitor between the E/S pin and  $-V_{CC}$  may be required.

To disable the output, the user must pull the E/S pin low, no greater than 0.8V above  $-V_{CC}$ . To once again enable the device, the E/S pin must be brought at least 2.4 volts above  $-V_{CC}$  or be disconnected. It should be noted that when the E/S pin is high, the internal thermal shutdown is still active.

If the E/S pin is used to monitor thermal shutdown, during normal operation the voltage on the E/S pin is typically 3.5V above  $-V_{CC}$ . Once shutdown has occurred this voltage will drop to approximately 350mV above  $-V_{CC}$ .

### COMPENSATION:

For normal operation output compensation is not typically required. However, if the MSK 182 or MSK 183 is intended to be driven into current limit the user may find that an R/C network is required. A snubber network from the output to ground for each amplifier will provide stability. If driving large capacitive or inductive loads, a snubber network will also enhance stability. Typically 3 $\Omega$  to 10 $\Omega$  in series with 0.01 $\mu$ F is acceptable.

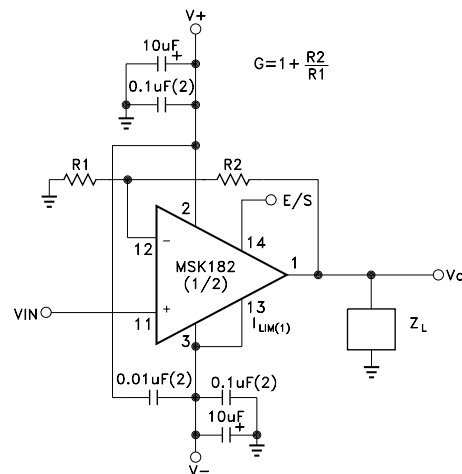


NOTE: (1)  $I_{LIM}$  connected to  $V_-$  achieves the maximum current limit, 5A(peak). (2) Connect capacitors directly to package power supply pins.


TYPICAL CONNECTION DIAGRAM

## APPLICATION NOTES cont.

### RESISTOR METHOD

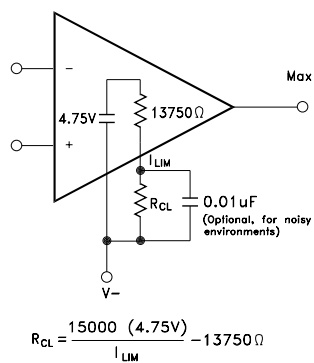

### DAC METHOD (Current or voltage)

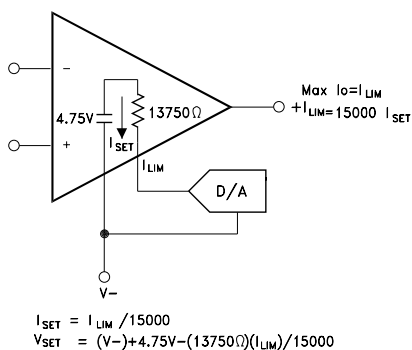

DESIRED CURRENT LIMIT	RESISTOR(1) (RCL)	CURRENT (ISET)	VOLTAGE (VSET)
0A	$I_{LIM}^{Open}$	0uA	$(V-) + 4.75V$
1A	57.6KΩ	67uA	$(V-) + 3.8V$
2.5A	14.7KΩ	167uA	$(V-) + 2.5V$
3A	10KΩ	200uA	$(V-) + 2V$
4A	4.02KΩ	267uA	$(V-) + 1.1V$
5A	$I_{LIM}^{Connected\ to\ V-}$	333uA	$(V-)$

NOTE: (1) Resistors are nearest standard 1% values.

Figure 1  
Adjustable Current Limit


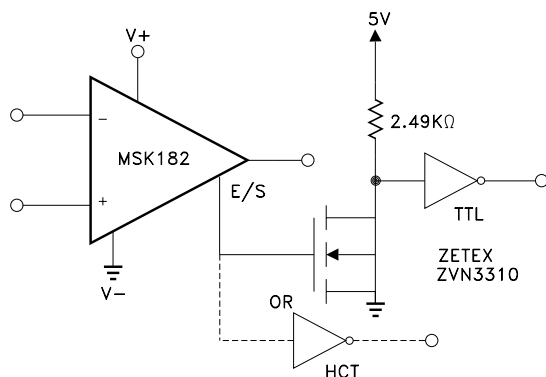


Figure 3  
Thermal Shutdown Status With a Single Supply

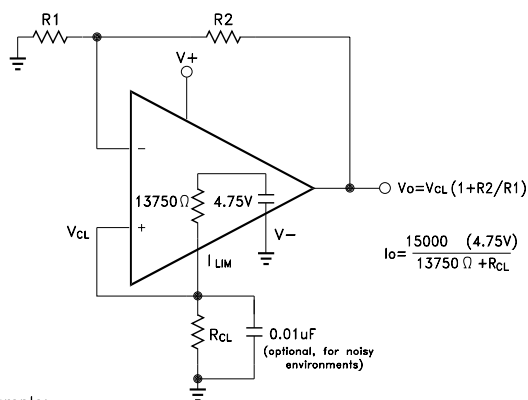

For Example:  
If  $I_{LIM} = 3A$ ,  $R_{CL} = 10K\Omega$   
 $V_{CL} = \frac{10K\Omega \cdot 4.75V}{(10K\Omega + 13750\Omega)} = 2V$   
Desired  $V_o = 20V$ ,  $G = \frac{20}{2} = 10$   
 $R_1 = 1K\Omega$  and  $R_2 = 9K\Omega$

Uses voltage developed at  $I_{LIM}$  pin as a moderately accurate reference voltage.

Figure 5  
Voltage Source

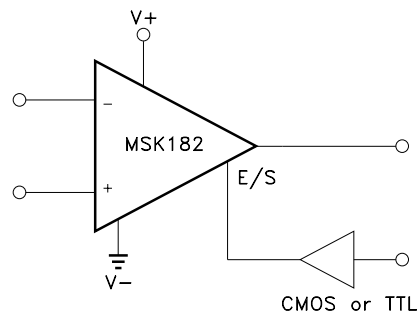


Figure 2  
Output Disable with a Single Supply

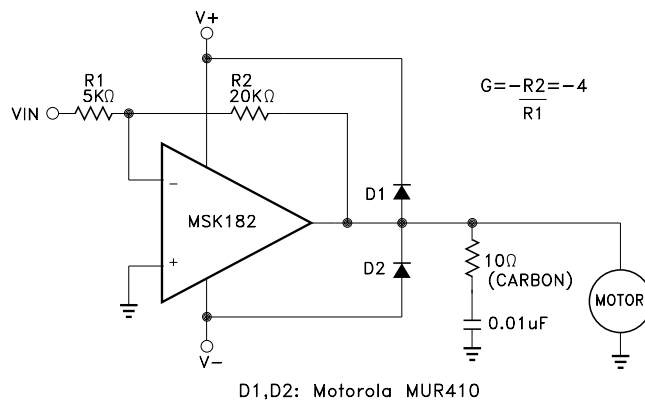


Figure 4  
Motor Drive Circuit











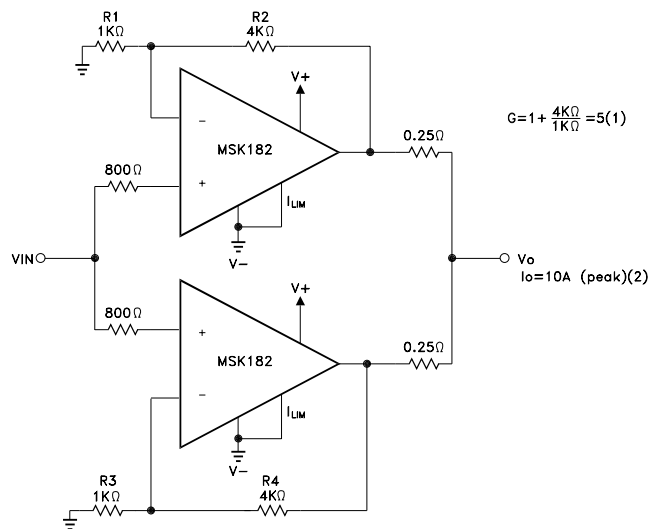


Figure 6  
Parallel Output For Increased Output Current

## TYPICAL PERFORMANCE CURVES

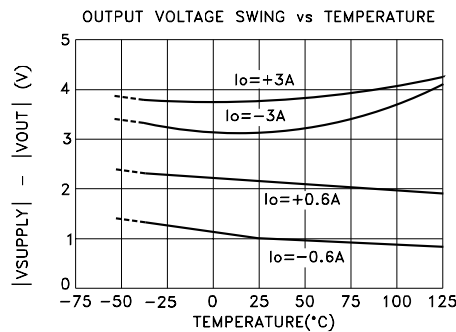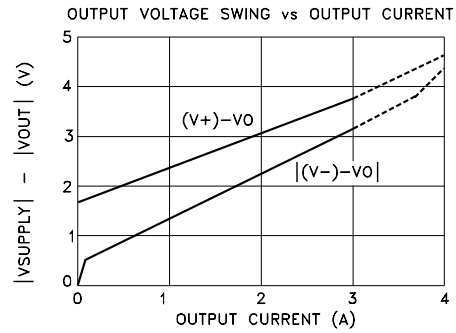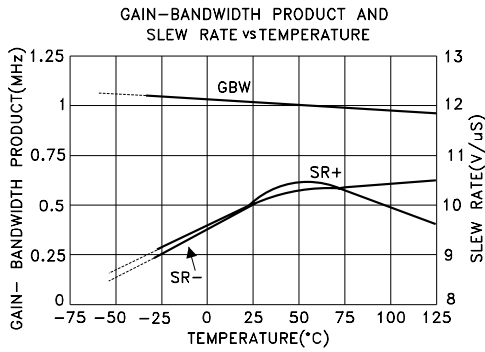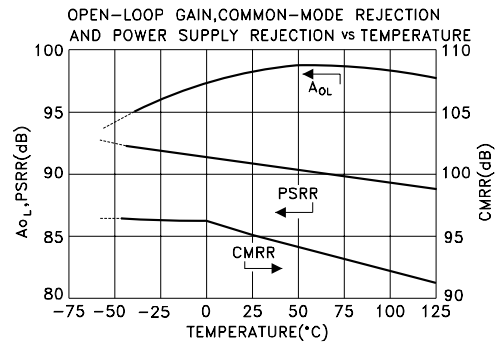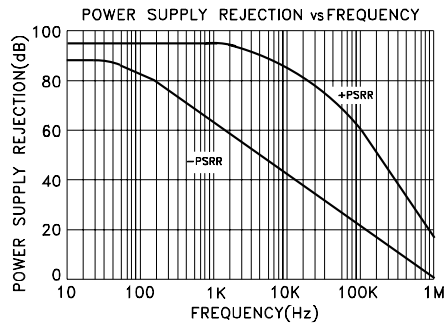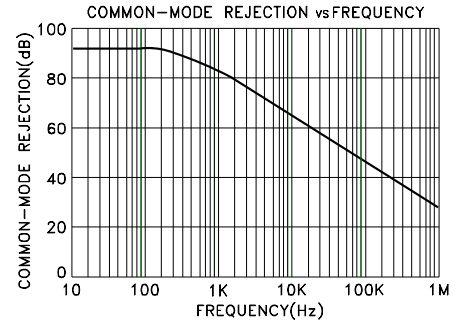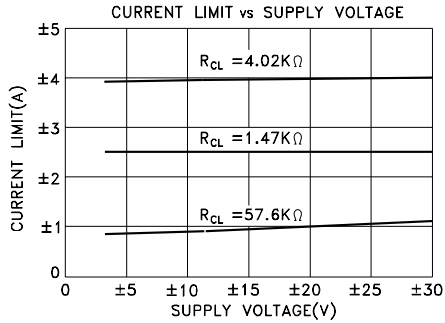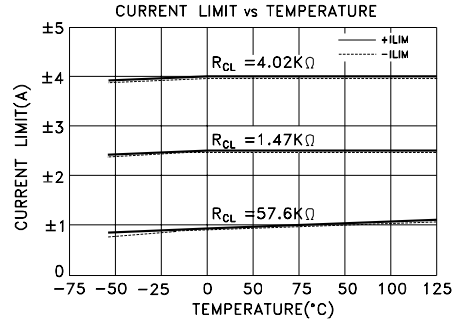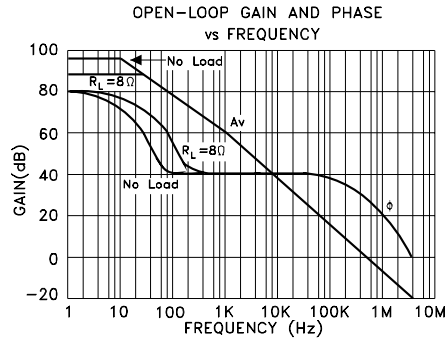

## MECHANICAL SPECIFICATIONS

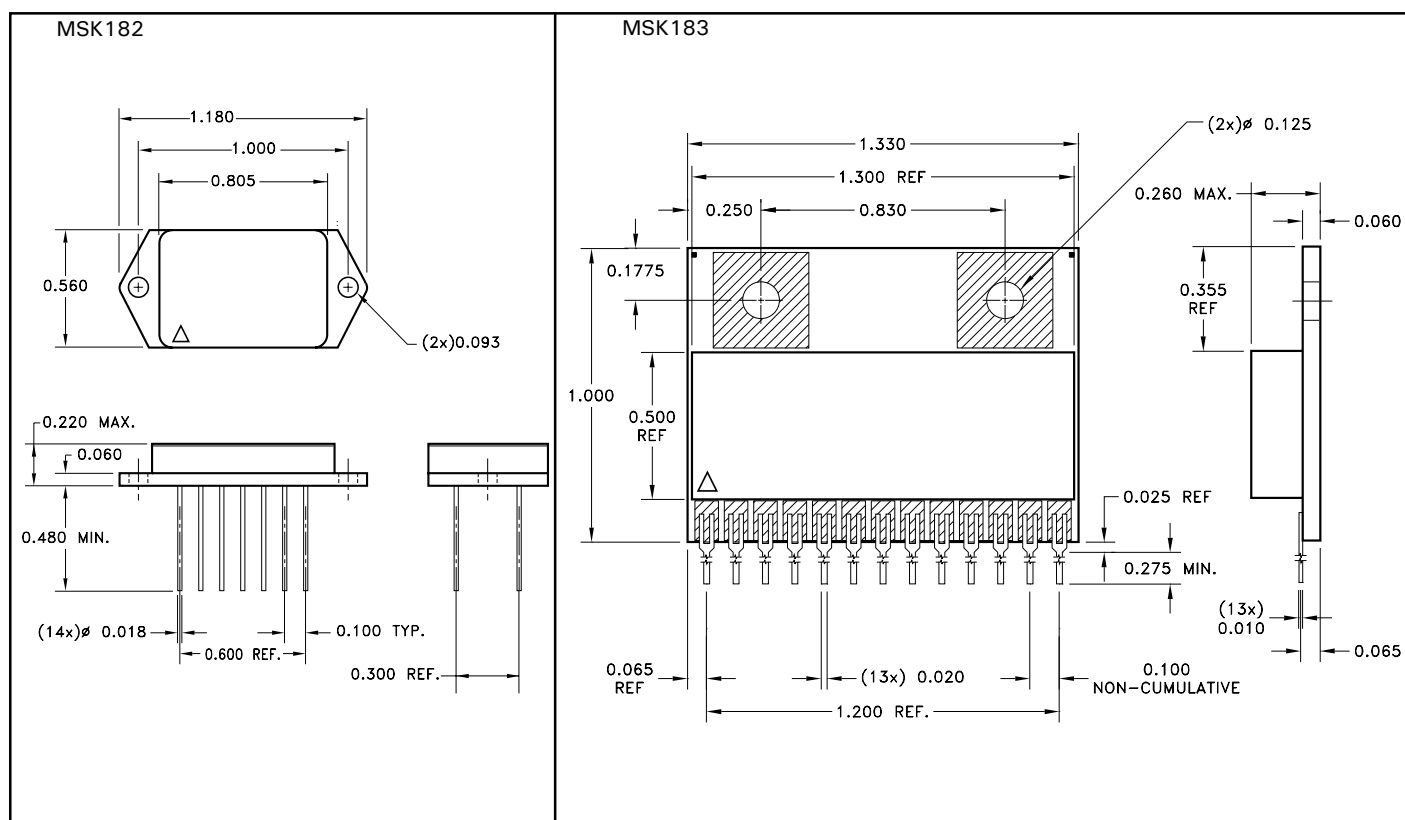

ESD TRIANGLE INDICATES PIN 1.

ALL DIMENSIONS ARE  $\pm 0.010$  INCHES UNLESS OTHERWISE LABELED.

## ORDERING INFORMATION

MSK 182 H

### SCREENING

BLANK = INDUSTRIAL; E = EXTENDED RELIABILITY

H = MIL-PRF-38534

### GENERAL PART NUMBER

**NOTE:** THE MSK 183 IS NOT AVAILABLE WITH E OR H SUFFIX.

M.S. Kennedy Corp.

4707 Dey Road, Liverpool, New York 13088

Phone (315) 701-6751

FAX (315) 701-6752

[www.mskennedy.com](http://www.mskennedy.com)

The information contained herein is believed to be accurate at the time of printing. MSK reserves the right to make changes to its products or specifications without notice, however, and assumes no liability for the use of its products.

Please visit our website for the most recent revision of this datasheet.