

INTRODUCTION:

Adam Tech TS Series Euro Terminal Blocks offer the advantages of our leading designs while providing one of the lowest applied cost interconnections possible. This series includes 3 variations of our standard block, a microminiature type for ultra space savings and a "screwdriverless" block which reduces assembly time and eliminates tool necessity. Our latest "pluggable" design allows the versatility of pre-assembly and/or post-assembly on the production line or in the field.

FEATURES:

- Capability to combine 2 and 3 pole units into multi-pole strips
- Available in multi-pole strips at no extra charge
- Standard block has choice of 3 wire entry angles
- Pluggable block with straight or right angle PCB headers
- New "screwdriverless" block eliminates tools, speeds assembly

SPECIFICATIONS:

Material:

Body: Polybutylene Terephthalate (PBT), glass reinforced thermoplastic, rated UL 94V-0

Body Color: Green

Terminals: Brass, tin plated

Cam Lever: Polybutylene Terephthalate (PBT), glass reinforced thermoplastic, rated UL 94V-0, white color

Screws: Steel, nickel plated

Electrical:

Operation voltage: 250 VAC max

Current rating: 10 AMPS max

Insulation resistance: 2000 MΩ min @ 1000 VDC between adjacent contacts (75°F and 50% R.H.)

Dielectric withstanding voltage: 5000 VAC min rms (sea level)

Mechanical:

Wire Range: 24 - 16 AWG (TSE Series: 22 - 18 AWG)

Tightening Torque: 2.5 in.-lbs.

Wire Strip Length: .250" (6.35)

Environmental:

Operating temperature: -65°C to + 125°C

PACKAGING:




Anti-static plastic bags

APPROVALS AND CERTIFICATIONS:

Recognized under the component program of Underwriters Laboratories, Inc. No. E130225

Certified by Canadian Standards Association No. LR700747

Verband Deutscher Elektrotechniker (VDE) APL42393

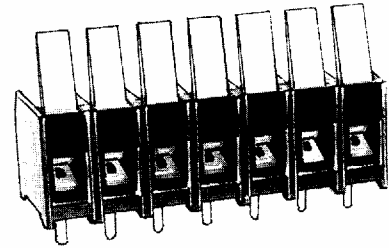

ORDERING INFORMATION

TSA

2

SERIES INDICATOR

TSA = Micro Block
TSB = Euro Block, Vertical Entry
TSC = Euro Block, Right Angle Entry
TSD = Euro Block, Angled Entry
TSE = "Screwdriverless" Block
TSF = "Pluggable" Block
THR = Header, Right Angle
THS = Header, Straight


POSITIONS

TSA / TSB / TSC / TSD
2 thru 24 (2 and 3 pole versions are stackable)
TSE / TSF / THR / THS
2 thru 24 poles


OPTIONS:

Add as suffix to basic part number (TSE Series)
FL = Flat Lever

MICRO BLOCK



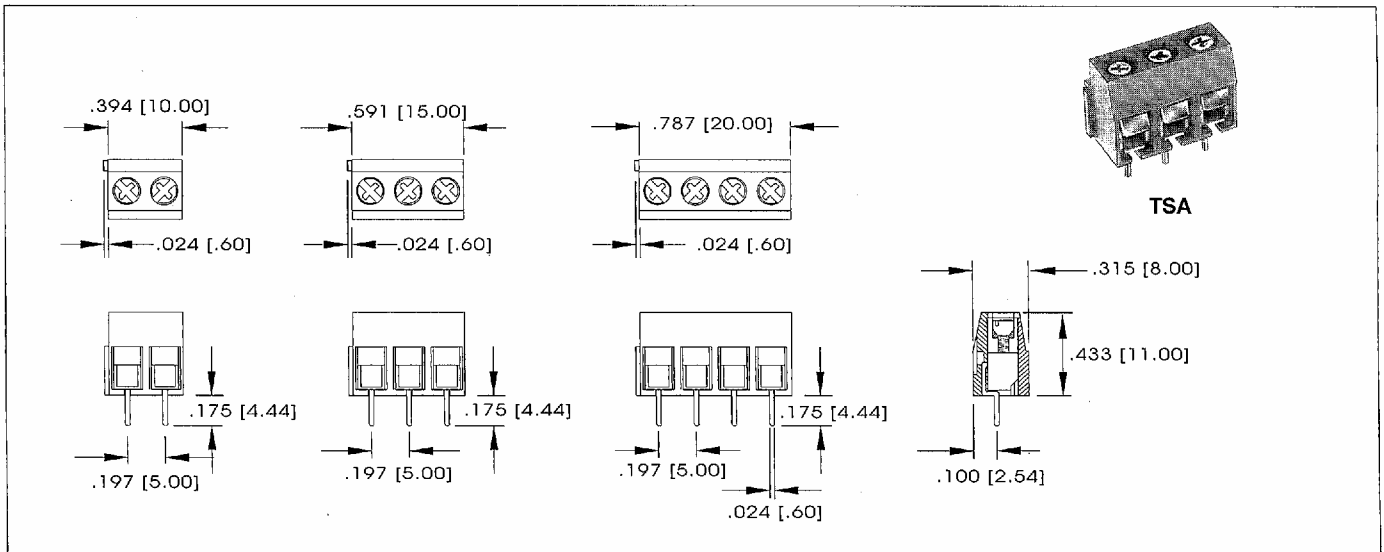





SCREWDRIVERLESS

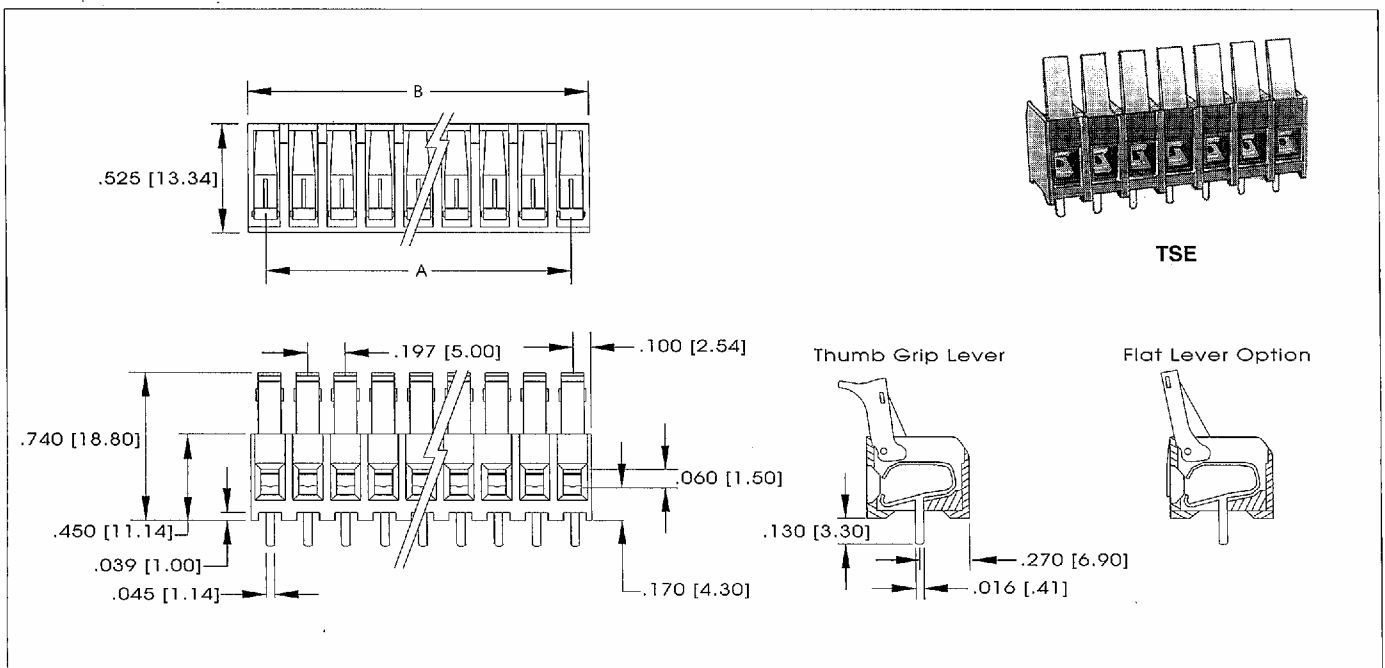

Unit: Inch / mm




POLES	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A	0.197 (5.00)	0.394 (10.00)	0.591 (15.00)	0.787 (20.00)	0.984 (25.00)	1.181 (30.00)	0.551 (14.00)	1.575 (40.00)	1.772 (45.00)	1.969 (50.00)	2.165 (55.00)	2.362 (60.00)	2.559 (65.00)	2.756 (70.00)	2.953 (75.00)	3.150 (80.00)
B	0.394 (10.00)	0.591 (15.00)	0.787 (20.00)	0.984 (25.00)	1.181 (30.00)	1.378 (35.00)	0.630 (16.00)	1.772 (45.00)	1.969 (50.00)	2.165 (55.00)	2.362 (60.00)	2.559 (65.00)	2.756 (70.00)	2.953 (75.00)	3.150 (80.00)	3.346 (85.00)

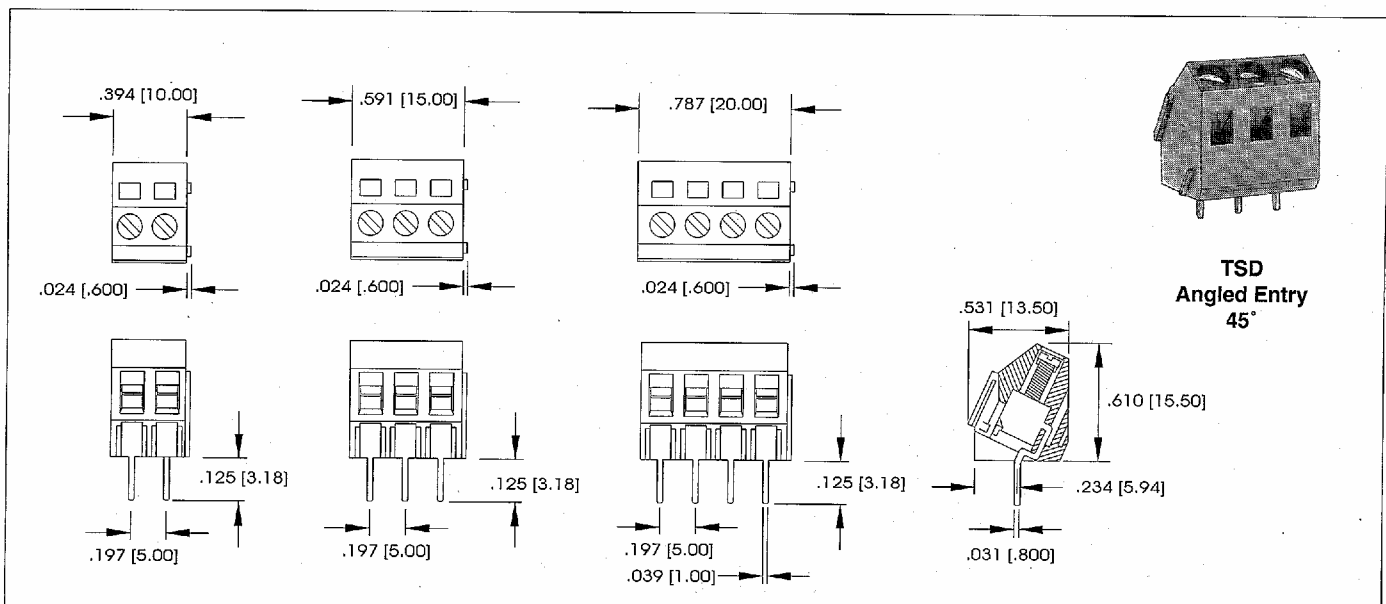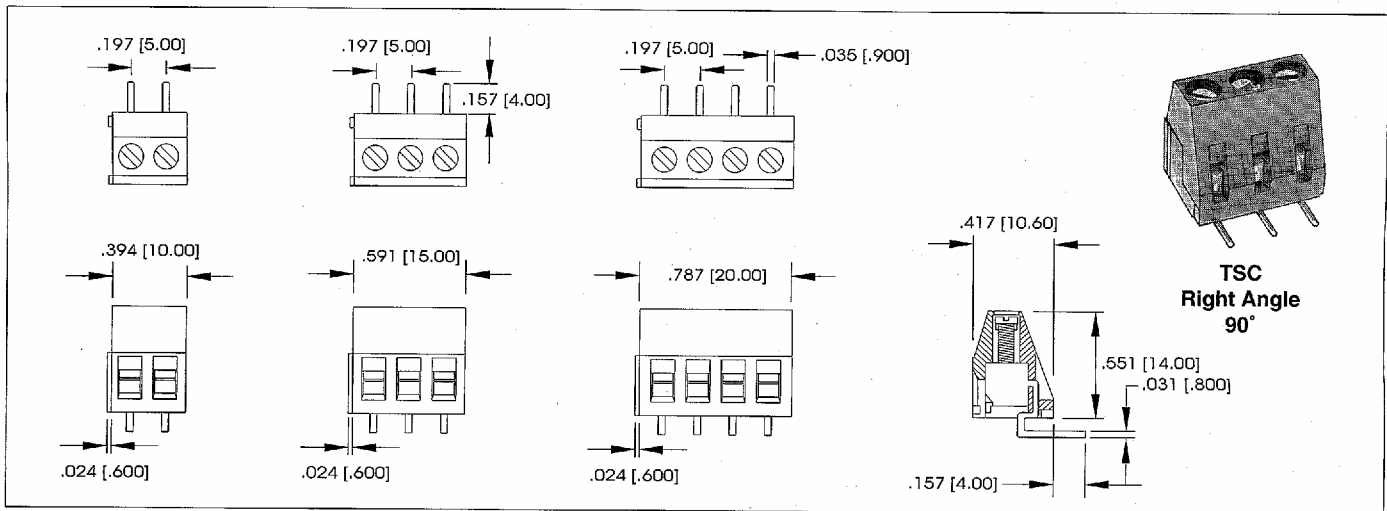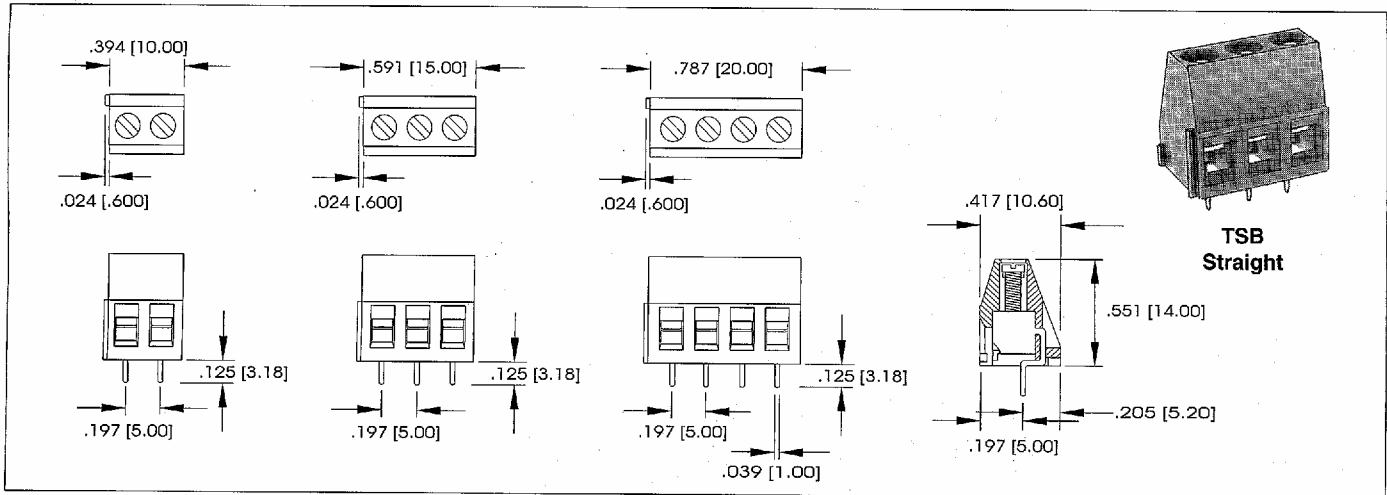

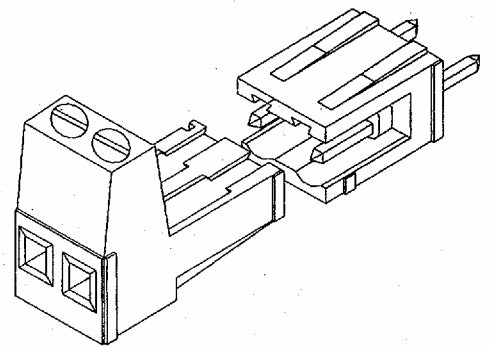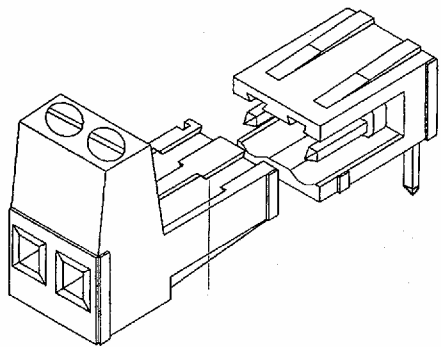




TERMINAL BLOCK BODY

TSF

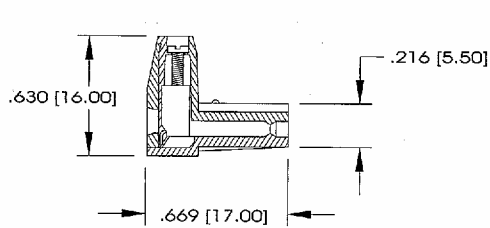

HEADER - RIGHT ANGLE

THR

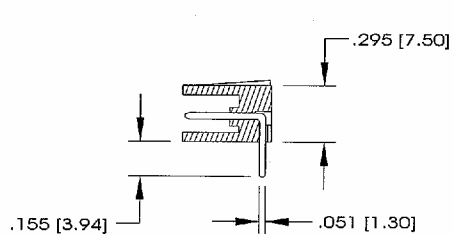

HEADER - STRAIGHT

THS

