




EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDAE-087-001 REV: 1

PART NO : A870B/VGD/HV5 ECN : _____ Page: 1/6

■ Package Dimensionas:

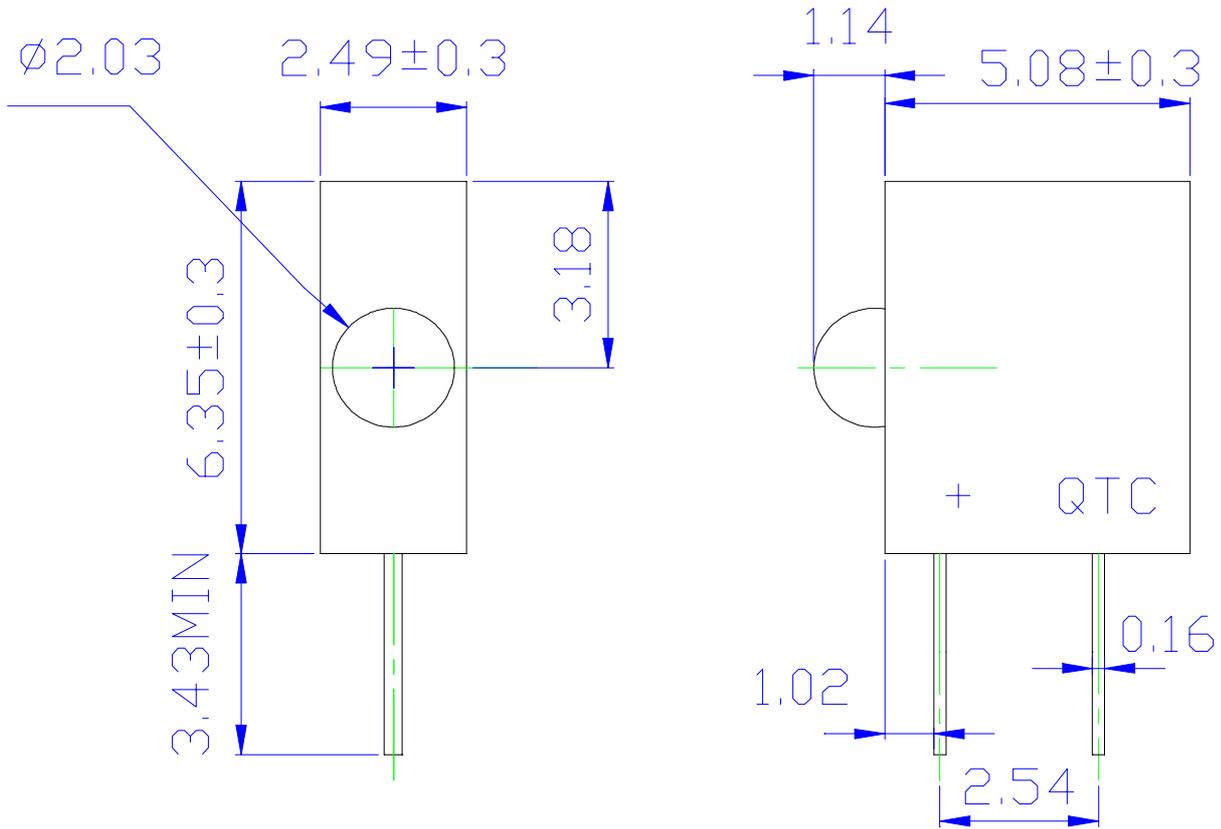

■ Notes:

- 1.All dimensions are in millimeters, tolerance is 0.25mm except being specified
- 2.Lead spacing is measured where the lead emerges from the package

LED PART NO	Chip		Lens Color
	Material	Emitted Color	
95-21VGD/HV5	GaP	Green	Green Diffused

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>

A0005076,000512



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDAE-087-001 REV: 1

PART NO : A870B/VGD/HV5 ECN : Page: 2/6

■ Descriptions:

- 1.ARRAY=Plastic Holder+Combination of Lamps
- 2.The array will easily mount the applicable lamps on any panel

■ Features:

- 1.Low power consumption
- 2.High efficiency and low cost
- 3.Good control and free combinations on the colors of LED lamps
- 5.Good lock and easy to assembly
- 6.Stackable and easy to assembly
- 7.Stackable vertically and easy to assembly
- 8.Versatile mounting on PCB or panel
- 9.Stackable horizontally and easy to assembly

■ Applications:

- 1.Used as indicators of indicating the degrees, Functions, Positions etc, in electronic instruments.




EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDAE-087-001 REV: 1

PART NO : A870B/VGD/HV5 ECN : _____ Page: 3/6






■ LED LAMP ARRAYS SELECTION GUIDE:

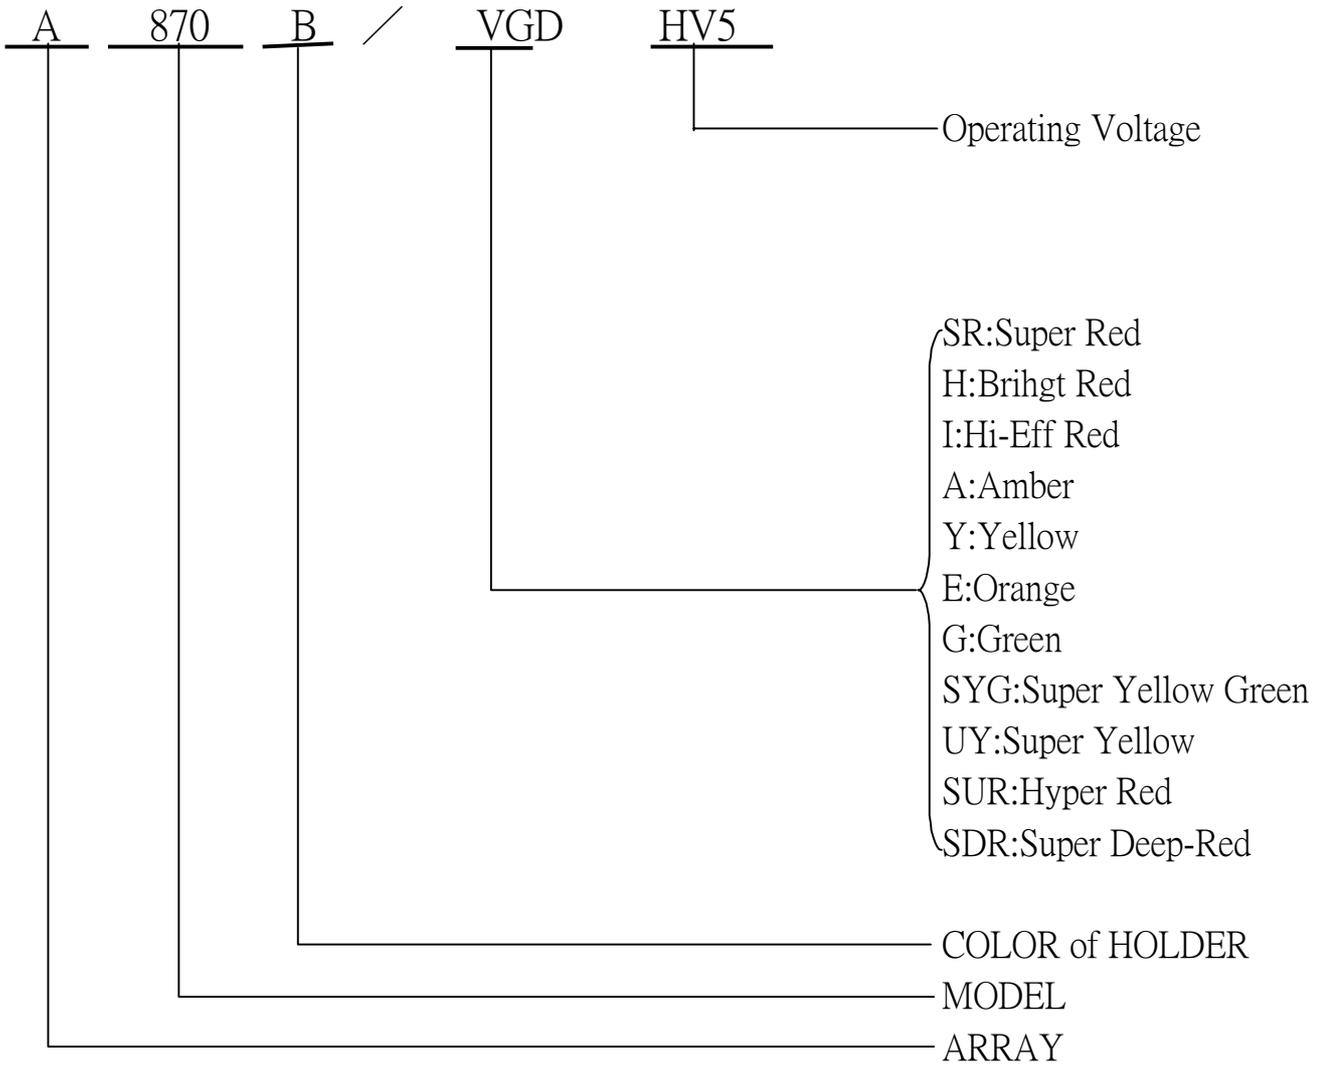



■ Typical Electro-Optical Characteristic Curves:

(V G)

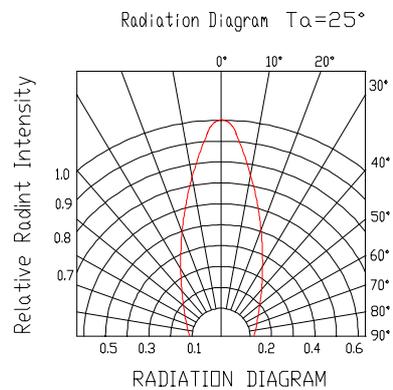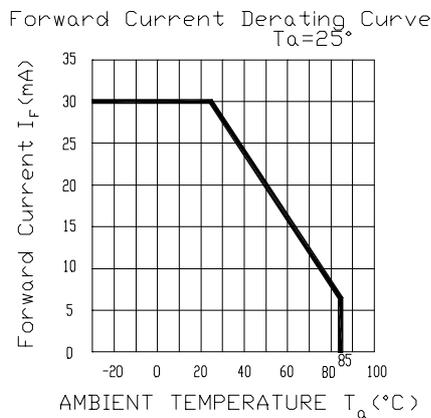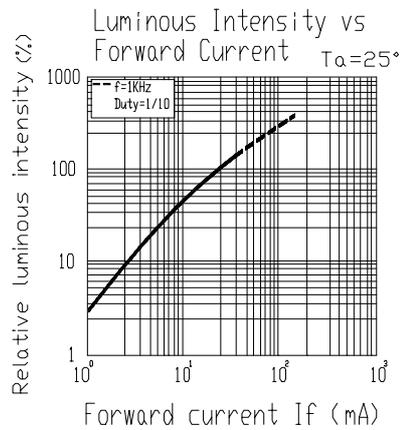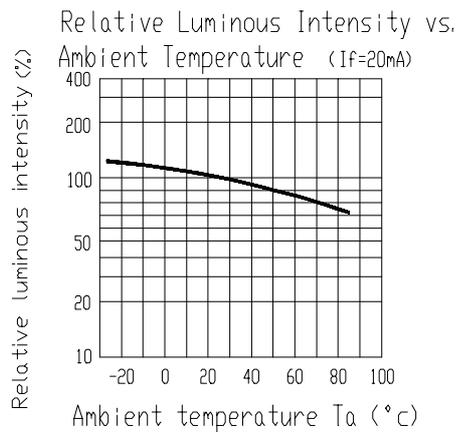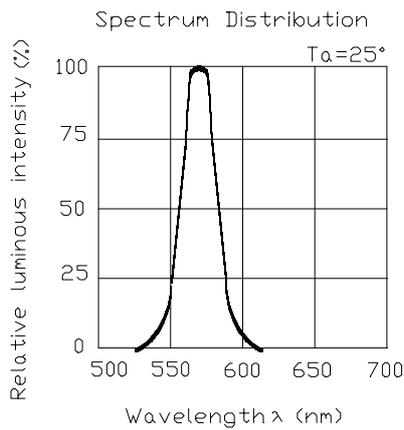



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDAE-087-001 REV: 1

PART NO : A870B/VGD/HV5 ECN : Page: 6/6

■ Reliability test items and conditions

No	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ┆ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ┆ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1