



天鉦科技股份有限公司
Eureka Microelectronics, Inc.

文件名稱 DOC Title :	文件編號 DOC NO : TDS7308-01
EK7308 Preliminary DATA SHEET	版 本 REV : 0.1
	頁 次 Page : 1 / 1

文件制/修訂一覽表 Revision History

版本	修訂日期	生效日期	修訂頁次	制/修訂項目/ 內容
<u>REV.</u>	<u>REV Date</u>	<u>Eff. Date</u>	<u>REV. Page</u>	<u>Revise item / Content</u>
0.1	2003/06/09	2003/06/19		New Issue

CONFIDENTIAL

EUREKA Microelectronics, Inc.

EK7308

Preliminary Rev. 0.1

DATA SHEET

240-Output TFT Gate Driver IC



6F, NO.12, INNOVATION 1ST. RD.,
SCIENCE-BASED INDUSTRIAL PARK,
HSIN-CHU CITY, TAIWAN, R.O.C.
<http://www.eureka.com.tw>

CONFIDENTIAL

Table of Contents

	Page
1.GENERAL DESCRIPTION.....	2
2.FEATURES.....	2
3.BLOCK DIAGRAM.....	2
4.PIN FUNCTION DESCRIPTIONS.....	3
5.FUNCTION OPERATIONS.....	4
6.ABSOLUTE MAXIMUM RATINGS.....	9
7.ELECTRICAL CHARACTERISTICS.....	10
8.DEFINITIONS.....	12

CONFIDENTIAL

240- Output TFT Gate Driver IC

1. DESCRIPTION

The EK7308 is a 240-output TFT gate driver IC suitable for driving TFT LCD panels.

2. FEATURES

- Output channels : 240 outputs+2 pins (fixed to VEE)
- Driver operating frequency : max. 200 KHz
- LCD supply voltage : VEE+40V
- Driver output levels : Two
- Logical interface : +2.7V ~ -5.5V
- Incorporates bi-directional shift register.
- COG type

3. BLOCK DIAGRAM

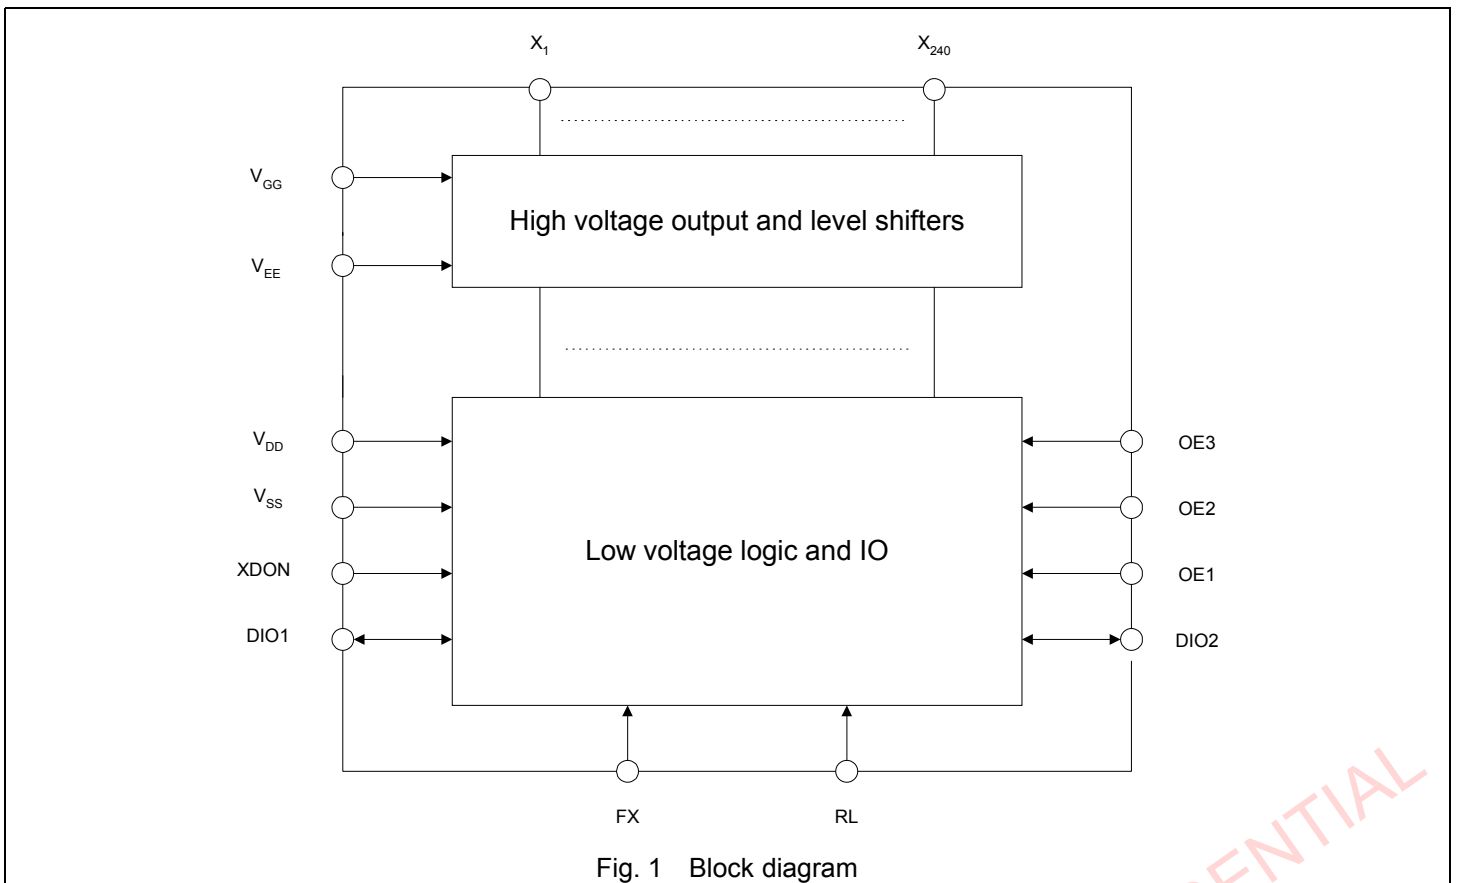


Fig. 1 Block diagram

4. PIN FUNCTION DESCRIPTIONS

Table 1. Pad description

Pad Name	I/O	Function	DESCRIPTION		
X ₁ -X ₂₄₀	O	TFT gate driver output	Under the control of the shift register data, OE1 or OE2 or OE3, and DIO1 or DIO2, the driver outputs are V _{GG} or V _{EE} and change their value at the rising edge of FX		
PATH	-	-	Short internally		
X ₀ , X ₂₄₁	-	-	LCD panel auxiliary pins. This pins output V _{EE} level.		
V _{EE}	-	Supply	Negative power supply for Level shifters. Chip ground		
V _{SS}	-	Supply	Logic ground, Reference of the voltages		
RL	I	Shift direction selection signal	RL = "H" : X ₁ to X ₂₄₀ (Shift left) RL = "L" : X ₂₄₀ to X ₁ (Shift right)		
DIO1 DIO2	I/O	Start pulse input and output		DIO1	DIO2
	RL = "H"		Input	Output	
	RL = "L"		Output	Input	
XDON	I	Negative active input pin	When XDON = "L" then the driver outputs are at the V _{GG} level independence of any other input or register value.		
FX	I	Shift register clock input	The start pulse is sampled at the rising edge of FX, The carry pulse changes at the falling edge of FX.		
OE1 OE2 OE3	I	Negative active input pin	When OE _N = "H" then the associated outputs are set to V _{EE} independent of the register data. This function is not synchronized with FX.		
V _{DD}	-	Supply	Logic positive power		
V _{GG}	-	Supply	High voltage power and TFT driver output high level		

CONFIDENTIAL

5. FUNCTIONAL OPERATIONS

Power supplies

The TFT voltage is relative to the logic ground, it can be a negative voltage value.

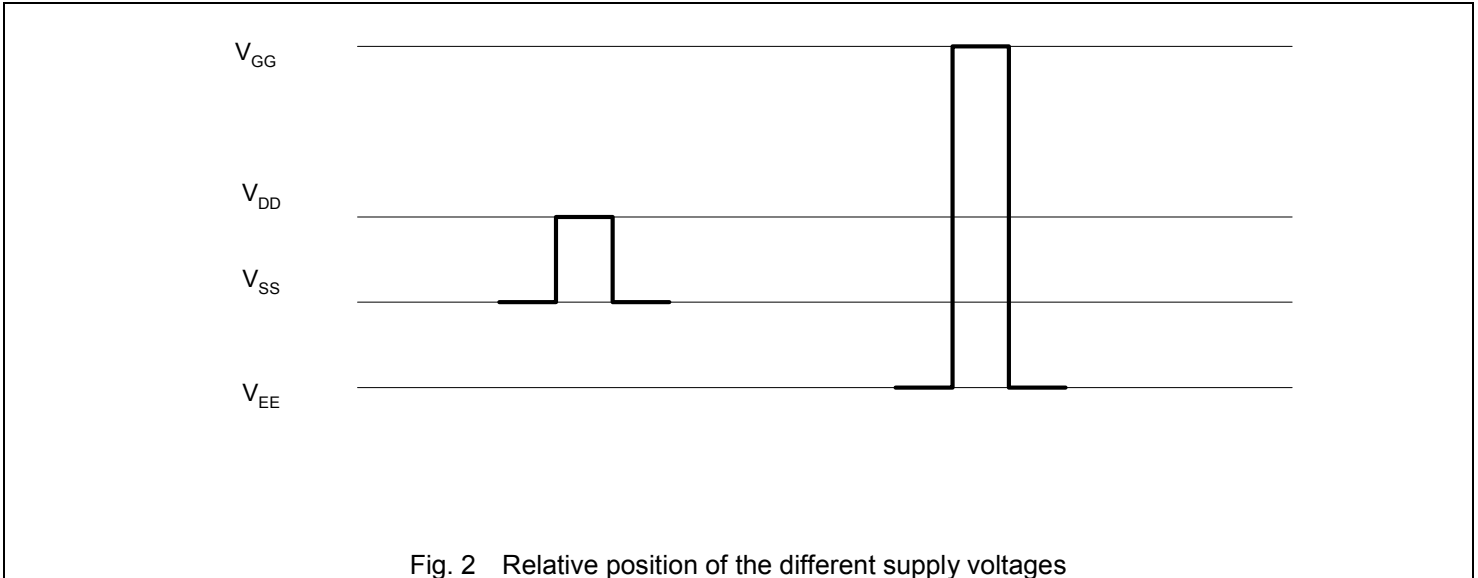


Fig. 2 Relative position of the different supply voltages

Shift direction

The input signals OE1, 2, 3 and the shift data control the value of the outputs (X_1 till X_{240}). Their value can be either V_{GG} or V_{EE} .

The signal LR controls the shift direction of the shift register. The shift register takes its value from one of the input/output pins DIO at the rising edge of the clock FX and shifts the value to the other input/output pin DIO where it is presented at the falling edge of FX.

Table 2. RL shift direction relation

RL	Start pulse taken from:	Data shift direction	Output pulse given at:
RL="H"	DIO1	$X_1 \rightarrow X_{240}$	DIO2
RL="L"	DIO2	$X_{240} \rightarrow X_1$	DIO1


CONFIDENTIAL

OE function

When the OE1, OE2, OE3 inputs are “H” than the outputs are driven to V_{EE} regardless of the contents of the shift register. Each of the three inputs drives it own set of outputs. This function is not synchronized with FX. The signal XDON can override this function. In the Table below the relation between each OE1,2,3 and their related outputs is given.

Table 3. OE1,2,3 to Output relation

Signal input	Symbol	LCD driver outputs
OE1	$X(3i+1) \ i=0\sim79$	$X_1, X_4, X_7, X_{10}, \dots, X_{231}, X_{232}, X_{235}, X_{238}$
OE2	$X(3i+2) \ i=0\sim79$	$X_2, X_5, X_8, X_{11}, \dots, X_{239}$
OE3	$X(3i+3) \ i=0\sim79$	$X_3, X_6, X_9, X_{12}, \dots, X_{234}, X_{237}, X_{240}$

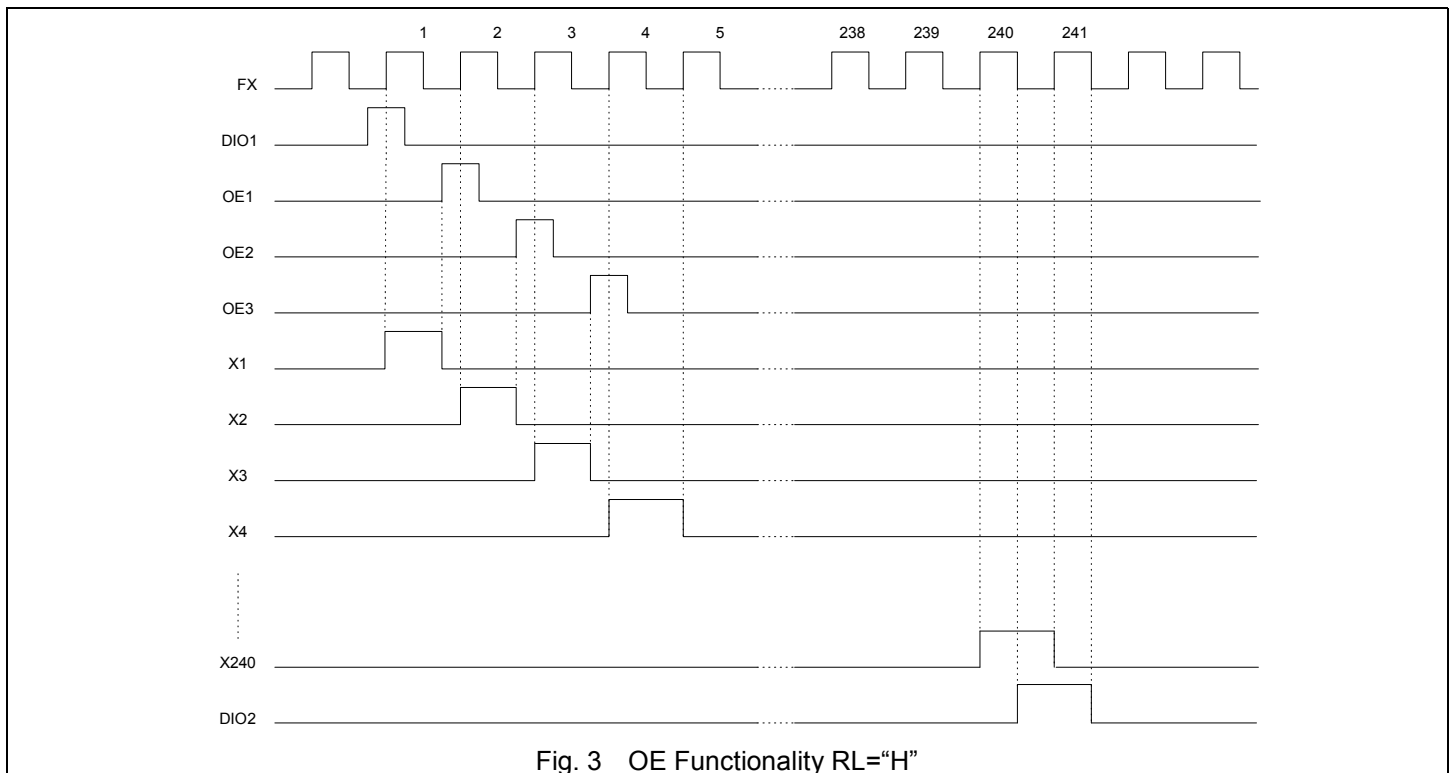

CONFIDENTIAL

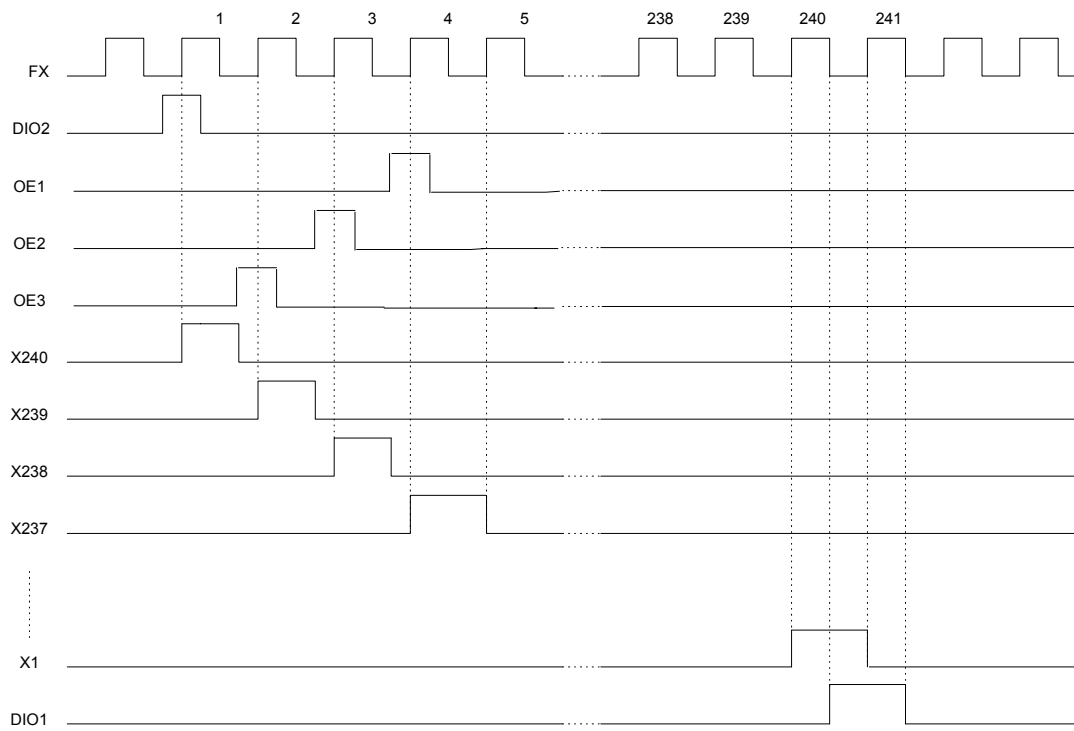


Fig. 4 OE Functionality RL="L"

CONFIDENTIAL

XDON function

When XDON input is "L" then all outputs are driven to the V_{GG} level. This function is overriding all other inputs. With this input all TFT gates are set to high to enable a display off function. This function is not synchronized with FX.

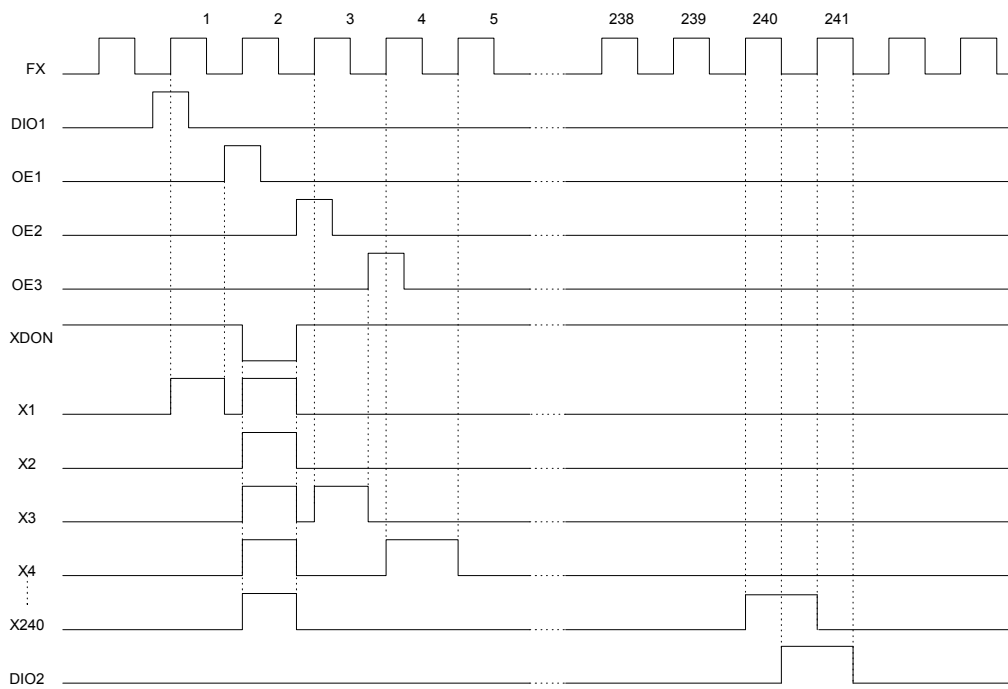


Fig. 5 XDON Functionality RL="H"

CONFIDENTIAL

PRECAUTIONS

Precaution when connecting or disconnecting the power supply

This IC has a high-voltage LCD driver, so it may be permanently damaged by a high current which may flow, if voltage is supplied to the LCD driver power supply while the logic system power supply is floating. The detail is as follows.

- When connecting the power supply, connect the LCD drive power after connecting the logic system power. Furthermore, when disconnecting the power, disconnect the logic system power after disconnecting the LCD drive power.

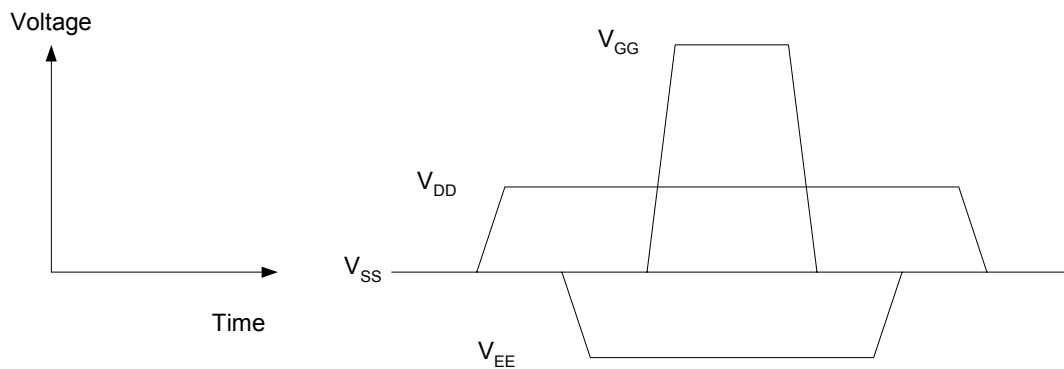


Fig. 9 Power ON/OFF sequence

CONFIDENTIAL

6. ABSOLUTE MAXIMUM RATINGS

Table 4. Absolute Maximum Ratings

In accordance with the Absolute Maximum Ratings System (IEC 134); See notes 1 and 2

Parameter	Symbol	Applicable Pins	Ratings	Unit	NOTE
Supply voltage(1)	V_{DD}	V_{DD}	$V_{SS} - 0.3$ to $+7.0$	V	1, 2
Supply voltage(2)	V_{GG}	V_{GG}	-0.3 to $+45.0$	V	
	V_{EE}	V_{EE}	$V_{GG} - 45$ to $+0.3$	V	
Input voltage	V_I	EO1, EO2, EO3, DIO1 DIO2, RL, FX, XDON	$V_{SS} - 0.3$ to $V_{DD} + 0.3$	V	
Storage temperature	T_{stg}		-45 to $+125$	°C	

Notes:

1. Stress above those listed under Absolute Maximum Ratings may cause permanent damage to the device
2. Parameters are valid over operating temperature range unless otherwise specified.

RECOMMENDED OPERATING CONDITIONS

Table 5. Recommended operating conditions

Parameter	Symbol	Applicable pins	Min.	Typ.	Max.	Unit	Notes
Supply voltage(1)	V_{DD}	V_{DD}	+2.7		+5.5	V	1, 2
Supply voltage(2)	V_{GG}	V_{GG}	+7.0		+25	V	
Supply voltage(3)	V_{EE}	V_{EE}	-16		-5	V	
Operating temperature	T_{OPR}		-20		+75	°C	

Notes:

1. All voltages are with respect to V_{SS} unless otherwise noted (0 V).
2. Ensure that voltages are set such that $V_{EE} \leq V_{SS} < V_{DD} < V_{GG}$.

CONFIDENTIAL

7. ELECTRICAL CHARACTERISTICS

Table 6. DC Characteristics

($V_{SS}=0$ V, $V_{DD}=+2.5$ V to $+5.5$ V, $V_{GG}=+15.0$ to $+40.0$ V, $T_{OPR}=-25^{\circ}$ C)

Parameter	Symbol	Conditions	Applicable pins	Min.	Typ.	Max.	Unit	Note
Operating Supply Current	IDD	fFX=15.7kHz V _{DD} =3.3V V _{EE} =-15V V _{GG} =15V Output with no load	V _{DD}			800	μA	
	IGG		V _{GG}			300	μA	
Standby Quiescent Supply Current	IDS	Standby V _{DD} =3.3V V _{EE} =-15V V _{GG} =15V	V _{DD}			600	μA	
	IGS		V _{GG}			100	μA	
Input pin								
H input voltage	VIH1		RL,FX, OE1~3,	0.7x V _{DD}		V _{DD}	V	
L input voltage	VIL1			0		0.3x V _{DD}	V	
Input leakage current	VLI1			-1		1	μA	XDON except
Output pin								
H input voltage	VIH3		DIO1, DIO2	0.7x V _{DD}		V _{DD}	V	
L input voltage	VIL3					0.3x V _{DD}	V	
H output voltage	VOH	I _O = -100 μA		V _{DD} -0.4			V	
L output voltage	VOL	I _O = 100 μA				0.4	V	
Liquid crystal driving output pin								
Output leakage current	VLO1			-50		50	μA	
Output ON resistance	RON-V _{GG}	V _{GG} =15V V _{EE} =-15V V _{OM} =V _{GG} -0.5V V _{OM} is X1~X240	X1~X240		600	1000	Ω	
	RON-V _{EE}	V _{GG} =15V V _{EE} =-15V V _{OM} =V _{EE} +0.5V V _{OM} is X1~X240			600	1000	Ω	

CONFIDENTIAL

Table 7. AC Characteristics

($V_{SS}=0\text{ V}$, $V_{DD}=+2.5\text{V to }+5.5\text{V}$, $V_{GG}-V_{EE}=+30.0\text{ to }+40.0\text{ V}$, $T_{OPR}=25^{\circ}\text{C}$)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Clock period	t_{FX}		-		200	KHz In cascade connection
Pulse width of clock H level	t_{WH}		500			ns
Pulse width of clock L level	t_{WL}		500			ns
DIO data set up time	t_{su}		200			ns
DIO data hold time	t_h		300			ns
DIO output delay time	t_{pd1}	CL=20pF			500	ns
Xn output delay time	t_{pd2}	CL=220pF			10	us
Input Rise Time	t_r				100	ns
Input Fall Time	t_f				100	ns
OEX output delay time	t_{pd3}	CL=220pF			900	ns

Timing Chart

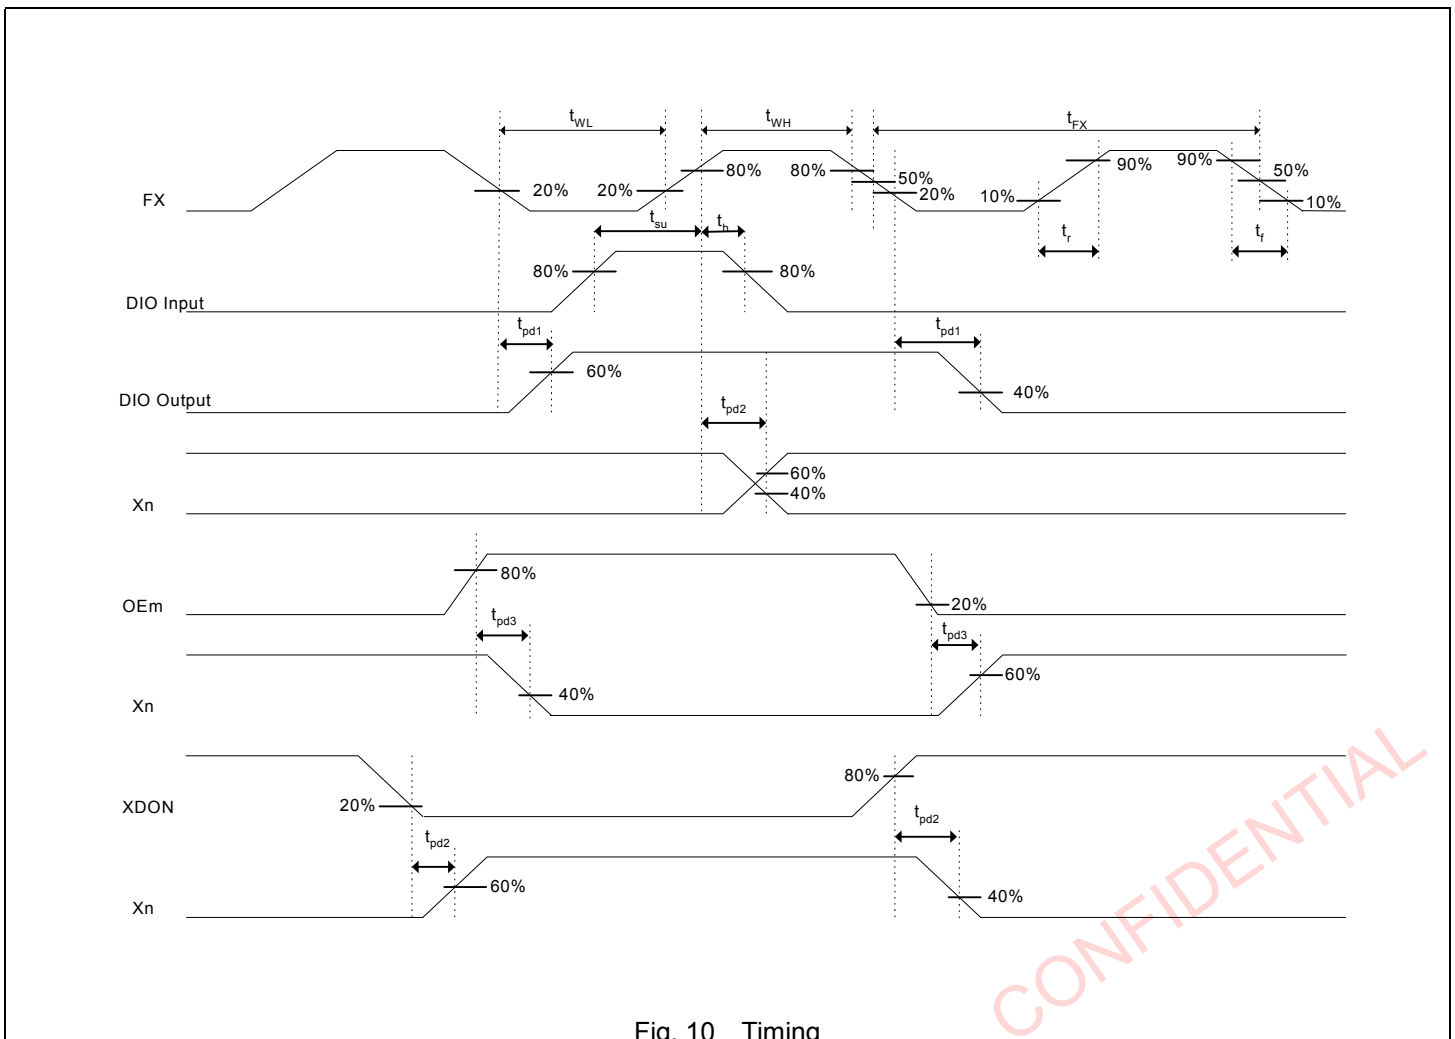


Fig. 10 Timing

CONFIDENTIAL

8. DEFINITIONS

Data Sheet status	
Objective specification	This data sheet contains target or goal specification for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specification.
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Eureka customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Eureka for any damages resulting from such improper use or sale.

CONFIDENTIAL