

TOSHIBA TRANSISTOR SILOCON PNP EPITAXIAL TYPE (PCT PROCESS)

## 2SC1959


AUDIO FREQUENCY LOW POWER AMPLIFIER APPLICATIONS  
 DRIVER STAGE AMPLIFIER APPLICATIONS  
 SWITCHING APPLICATIONS

Unit in mm

- Excellent  $h_{FE}$  Linearity  
 :  $h_{FE}(2) = 25$  (Min.) :  $V_{CE} = 6V$ ,  $I_C = 400mA$
- 1 Watt Amplifier Applications.
- Complementary to 2SA562TM.

MAXIMUM RATINGS ( $T_a = 25^\circ C$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	35	V
Collector-Emitter Voltage	$V_{CEO}$	30	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	500	mA
Base Current	$I_B$	100	mA
Collector Power Dissipation	$P_C$	500	mW
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature Range	$T_{stg}$	-55~150	$^\circ C$

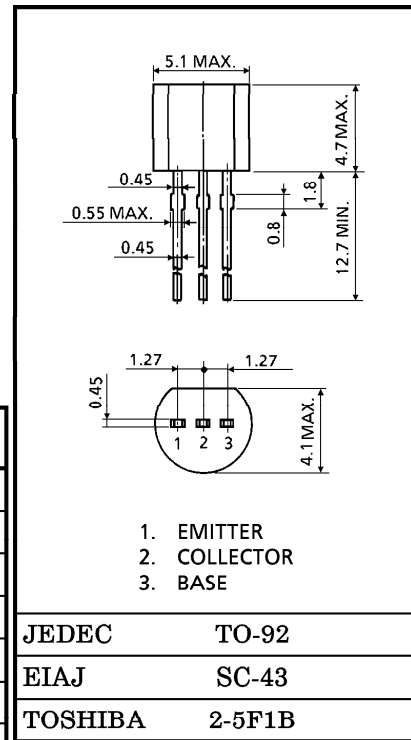

JEDEC TO-92  
 EIAJ SC-43  
 TOSHIBA 2-5F1B

Weight : 0.21g

ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB} = 35V$ , $I_E = 0$	—	—	0.1	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB} = 5V$ , $I_C = 0$	—	—	0.1	$\mu A$
DC Current Gain	$h_{FE}(1)$ (Note)	$V_{CE} = 1V$ , $I_C = 100mA$	70	—	400	
	$h_{FE}(2)$ (Note)	$V_{CE} = 6V$ , $I_C = 400mA$	25	—	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 100mA$ , $I_B = 10mA$	—	0.1	0.25	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE} = 1V$ , $I_C = 100mA$	—	0.8	1.0	V
Transition Frequency	$f_T$	$V_{CE} = 6V$ , $I_C = 20mA$	—	300	—	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB} = 6V$ , $I_E = 0$ , $f = 1MHz$	—	7	—	pF

Note :  $h_{FE}(1)$  Classification O : 70~140, Y : 120~240, GR : 200~400  
 $h_{FE}(2)$  Classification O : 25 (Min.), Y : 40 (Min.)

961001EAA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

