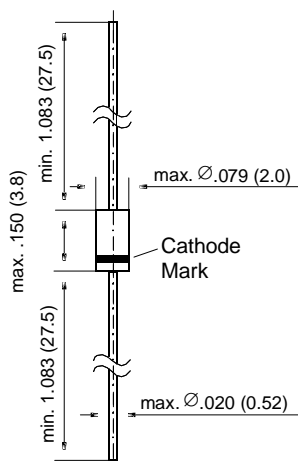


**1N746 THRU 1N759****ZENER DIODES****FEATURES**

- ◆ Silicon Planar Power Zener Diodes
- ◆ Standard Zener voltage tolerance is  $\pm 5\%$  for "A" suffix. Other tolerances are available upon request.

**DO-35**

Dimensions are in inches and (millimeters)

**MECHANICAL DATA**

**Case:** DO-35 Glass Case

**Weight:** approx. 0.13 g

**MAXIMUM RATINGS**

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOL	VALUE	UNIT
Zener Current (see Table "Characteristics")			
Power Dissipation at $T_L = 75^\circ\text{C}$	$P_{\text{tot}}$	500 <sup>(1)</sup>	mW
Maximum Junction Temperature	$T_j$	175	°C
Storage Temperature Range	$T_s$	- 65 to +175	°C

**NOTES:**

(1)  $T_L$  is measured 3/8" from body.

	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance Junction to Ambient Air	$R_{\text{thJA}}$	-	-	300 <sup>(1)</sup>	°C/W
Forward Voltage at $I_F = 200 \text{ mA}$	$V_F$	-	-	1.5	Volts

**NOTES:**

(1) Valid provided that leads at a distance of 3/8" from case are kept at ambient temperature.

# 1N746 THRU 1N759

## ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Type Number	Nominal Zener Voltage $V_Z @ I_{ZT}^{(3)}$ (Volts)	Test Current $I_{ZT}$ (mA)	Maximum Zener Impedance $Z_{ZT} @ I_{ZT}^{(1)}$ ( $\Omega$ )	Maximum Regulator Current $I_{ZM}^{(2)}$ (mA)	Maximum Reverse Leakage Current	
					$T_A = 25^\circ\text{C}$ $I_R @ V_R = 1\text{V}$ ( $\mu\text{A}$ )	$T_A = 150^\circ\text{C}$ $I_R @ V_R = 1\text{V}$ ( $\mu\text{A}$ )
1N746A	3.3	20	28	110	10	30
1N747A	3.6	20	24	100	10	30
1N748A	3.9	20	23	95	10	30
1N749A	4.3	20	22	85	2	30
1N750A	4.7	20	19	75	2	30
1N751A	5.1	20	17	70	1	20
1N752A	5.6	20	11	65	1	20
1N753A	6.2	20	7	60	0.1	20
1N754A	6.8	20	5	55	0.1	20
1N755A	7.5	20	6	50	0.1	20
1N756A	8.2	20	8	45	0.1	20
1N757A	9.1	20	10	40	0.1	20
1N758A	10	20	17	35	0.1	20
1N759A	12	20	30	30	0.1	20

### NOTES:

- (1) The Zener Impedance is derived from the 1 KHz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener current ( $I_{ZT}$ ) is superimposed on  $I_{ZT}$ . Zener Impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.
- (2) Valid provided that leads at a distance of 3/8" from case are kept at ambient temperature.
- (3) Measured with device junction in thermal equilibrium.