

**DATA SHEET**

19 August 2003

No. 00014
REV 1-03REPLACEMENT
of CS5203

MIK5203-xx series

3A LOW DROPOUT POSITIVE VOLTAGE REGULATOR

CONTENTS	Page	CONTENTS	Page
GENERAL DESCRIPTION	1	BATTERY CHARGER	5
FEATURES	1	IMPROVING RIPPLE REJECTION	5
BLOCK DIAGRAM	2	LOW DROPOUT NEGATIVE SUPPLY	5
PIN ASSIGNMENTS	2	AUTOMATIC LIGHT CONTROL	5
TYPICAL APPLICATION CIRCUIT	2	ACTIVE TERMINATOR FOR SCSI-2 BUS	5
FIXED VOLTAGE REGULATOR	2	BATTERY BACKED UP REGULATED SUPPLY	5
ADJUSTABLE VOLTAGE REGULATOR	2	HIGH EFFICIENCY DUAL SUPPLY	6
ABSOLUTE MAXIMUM RATINGS	2	HIGH EFFICIENCY REGULATOR	6
ELECTRICAL CHARACTERISTICS	3		
TYPICAL CHARACTERISTICS	4	APPLICATION INFORMATION	7
DROPOUT VOLTAGE ($V_{IN} - V_{OUT}$)	4	STABILITY	7
MINIMUM OPERATING CURRENT (ADJUSTABLE DEVICE)	4	PROTECTIONS DIODES	7
SHORT-CIRCUIT CURRENT	4	OUTPUT VOLTAGE	7
LOAD REGULATION	4	LOAD REGULATION	7
RIPPLE REJECTION	4	RIPPLE REJECTION	7
RIPPLE REJECTION VERSUS CURRENT	4	PHYSICAL DIMENSIONS AND MARKING DIAGRAMS	9
TEMPERATURE STABILITY	5	TO-220-3	9
ADJUST PIN CURRENT	5	TO-263-3	9
TYPICAL APPLICATIONS	5	ORDERING INFORMATION	10
1.2V TO 5.5V ADJUSTABLE REGULATOR	5		
5V REGULATOR WITH SHUTDOWN	5		

MIKRON JSC • <http://www.mikron.ru> • 19 August 2003

GENERAL DESCRIPTION

The MIK5203 is a positive low dropout regulator designed to provide up to 3A of output current. The device is available in an adjustable version and fixed output voltages of 1.8V, 2.5V, 3.0V and 3.3V. All internal circuitry is designed to operate down to 1V input to output differential. Dropout voltage is guaranteed at a maximum of 1.3V at 3A, decreasing at lower load currents. On chip trimming adjusts the reference/output voltage to within $\pm 1\%$.

The MIK5203 requires a minimum of 22 μ F of output capacitance for stability. Output capacitors of this size or larger are normally included in most regulator designs.

Unlike PNP type regulators where up to 10% of the output current is wasted as quiescent current, the quiescent current of the MIK5203 flows into the load, increasing efficiency.


FEATURES

- Adjustable or Fixed Output
- Output Current of 3A
- Low Dropout, 1.15V at 3A Output Current
- 0.04% Line Regulation
- 0.08% Load Regulation
- 100% Thermal Limit Burn-In
- Fast Transient Response





MIKRON JSC • http://www.mikron.ru • 19 August 2003

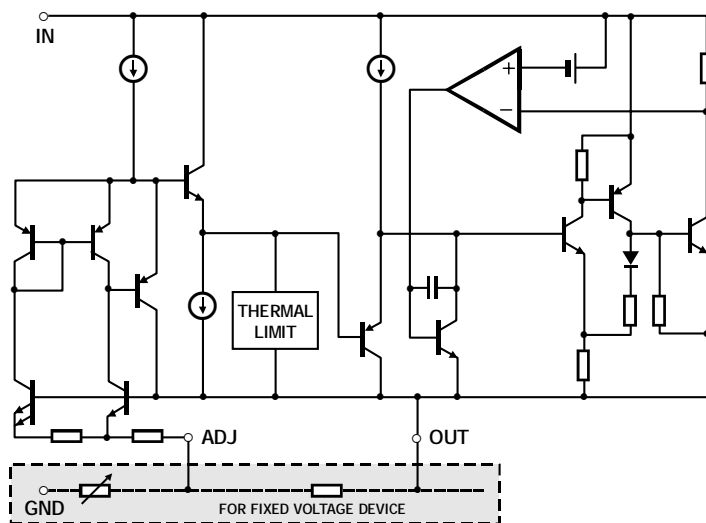BLOCK DIAGRAM




PIN ASSIGNMENTS


MIK5203-xxT, MIK5203T	
TO-220-3 	TAB – V _{OUT} 1 – ADJ/GND 2 – V _{OUT} 3 – V _{IN}
MIK5203-xxD2T, MIK5203D2T	
TO-263-3 	TAB – V _{OUT} 1 – ADJ/GND 2 – V _{OUT} 3 – V _{IN}

TYPICAL APPLICATION CIRCUIT

FIXED VOLTAGE REGULATOR

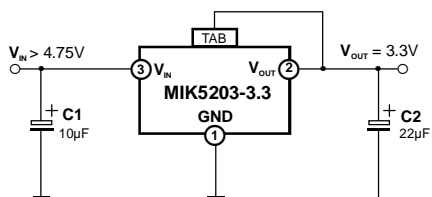

ADJUSTABLE VOLTAGE REGULATOR

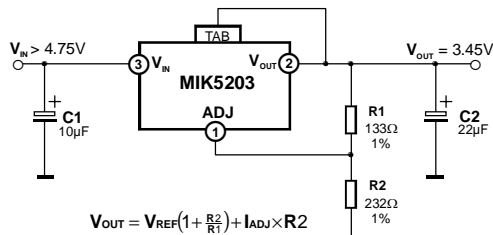

$$V_{OUT} = V_{REF} \left(1 + \frac{R_2}{R_1}\right) + I_{ADJ} \times R_2$$

NOTES:

- C1 needed if device is far from filter capacitors
- C2 minimum value required for stability

ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	MAXIMUM	UNIT
P _D	Power Dissipation	Internally Limited	W
V _{IN}	Input Voltage	7	V
T _J	Operating Junction Temperature Range		°C
	Control Section	0 to 125	
	Power Transistor	0 to 150	
T _{STG}	Storage Temperature	-65 to 150	°C
T _{LEAD}	Lead Temperature Soldering, 10sec)	300	°C

NOTE:

Stresses above those listed under «Absolute Maximum Ratings» may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operation sections of the specifications is not implied.

Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.



ELECTRICAL CHARACTERISTICS

Electrical Characteristics at $I_{LOAD} = 0\text{ mA}$ and $T_J = +25^\circ\text{C}$ unless otherwise specified.

PARAMETER	DEVICE	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Reference Voltage (Note 1)	MIK5203	$V_{IN} = 2.75\text{V}, I_{LOAD} = 10\text{mA}$	1.238	1.250	1.262	V	
		$V_{IN} = 2.7\text{V to }12\text{V}, I_{LOAD} = 10\text{mA to }3\text{A}$	<input checked="" type="checkbox"/> 1.230	1.250	1.270	V	
Output Voltage	MIK5203-1.5	$V_{IN} = 4.0\text{V}$	1.485	1.500	1.515	V	
		$V_{IN} = 3.0\text{V}, I_{LOAD} = 0\text{mA to }3\text{A}$	<input checked="" type="checkbox"/> 1.475	1.500	1.525	V	
	MIK5203-1.8	$V_{IN} = 4.3\text{V}$	1.782	1.800	1.818	V	
		$V_{IN} = 3.3\text{V}, I_{LOAD} = 0\text{mA to }3\text{A}$	<input checked="" type="checkbox"/> 1.771	1.800	1.829	V	
	MIK5203-2.5	$V_{IN} = 5.0\text{V}$	2.475	2.500	2.525	V	
		$V_{IN} = 4.0\text{V}, I_{LOAD} = 0\text{mA to }3\text{A}$	<input checked="" type="checkbox"/> 2.460	2.500	2.540	V	
	MIK5203-2.85	$V_{IN} = 5.35\text{V}$	2.821	2.850	2.879	V	
		$V_{IN} = 4.40\text{V}, I_{LOAD} = 0\text{mA to }3\text{A}$	<input checked="" type="checkbox"/> 2.805	2.850	2.895	V	
	MIK5203-3.0	$V_{IN} = 5.5\text{V}$	2.970	3.000	3.030	V	
		$V_{IN} = 4.5\text{V}, I_{LOAD} = 0\text{mA to }3\text{A}$	<input checked="" type="checkbox"/> 2.950	3.000	3.050	V	
	MIK5203-3.3	$V_{IN} = 5.8\text{V}$	3.267	3.300	3.333	V	
		$V_{IN} = 4.8\text{V}, I_{LOAD} = 0\text{mA to }3\text{A}$	<input checked="" type="checkbox"/> 3.247	3.300	3.353	V	
	MIK5203-3.5	$V_{IN} = 6.0\text{V}$	3.465	3.500	3.535	V	
		$V_{IN} = 5.0\text{V}, I_{LOAD} = 0\text{mA to }3\text{A}$	<input checked="" type="checkbox"/> 3.445	3.500	3.555	V	
	MIK5203-5.0	$V_{IN} = 7.5\text{V}$	4.950	5.000	5.050	V	
		$V_{IN} = 6.5\text{V}, I_{LOAD} = 0\text{mA to }3\text{A}$	<input checked="" type="checkbox"/> 4.920	5.000	5.080	V	
	LINE REGULATION (Note 1)	All	$I_{LOAD} = 10\text{mA}, (1.5\text{V} + V_{OUT}) \leq V_{IN} \leq 12\text{V}$	<input checked="" type="checkbox"/>	0.04	0.2	%
	LOAD REGULATION (Note 1)	All	$V_{IN} = V_{OUT} + 2.5\text{V}, I_{LOAD} = 10\text{mA to }3\text{A}$	<input checked="" type="checkbox"/>	0.08	0.4	%
MINIMUM LOAD CURRENT (Note 1, 2)	MIK5203	$V_{IN} = 5\text{V}$	<input checked="" type="checkbox"/>	1.7	5.0	mA	
GROUND PIN CURRENT	MIK5203- 1.5 /1.8/2.5/ 2.85/3.0/3.3/ 3.5 /5.0	$V_{IN} = V_{OUT} + 2.5\text{V}, I_{LOAD} = 10\text{mA to }3\text{A}$	<input checked="" type="checkbox"/>	5	10	mA	
ADJUST PIN CURRENT (Note 1)	MIK5203	$V_{IN} = 2.75\text{V}, I_{LOAD} = 10\text{mA}$	<input checked="" type="checkbox"/>	50	120	μA	
CURRENT LIMIT (Note 1)	All	$(V_{IN} - V_{OUT}) = 3\text{V}$	<input checked="" type="checkbox"/>	3	4	A	
RIPPLE REJECTION (Note 1)	All	$V_{IN} = V_{OUT} + 2.5\text{V}, I_{LOAD} = 1.5\text{A}$		60	75	dB	
THERMAL REGULATION (Note 1)	MIK5203	$T_A = 25^\circ\text{C}, 30\text{ms pulse}$		0.003		%/W	
DROPOUT VOLTAGE (Note 1, 3)	All	$I_{LOAD} = 10\text{mA}$	<input checked="" type="checkbox"/>	1.00	1.15	V	
		$I_{LOAD} = 3\text{A}$		1.15	1.30	V	

The denotes the specifications which apply over the full temperature range.


Note 1: For MIK5203 (adjustable) $V_{adj} = 0\text{V}$

Note 2: For the adjustable device the minimum load current is the minimum current required to maintain regulation. Normally the current in the resistor divider used to set the output voltage is selected to meet the minimum load current requirement.

Note 3: The specification represent the minimum input/output voltage required to maintain 1% regulation.




TYPICAL CHARACTERISTICS

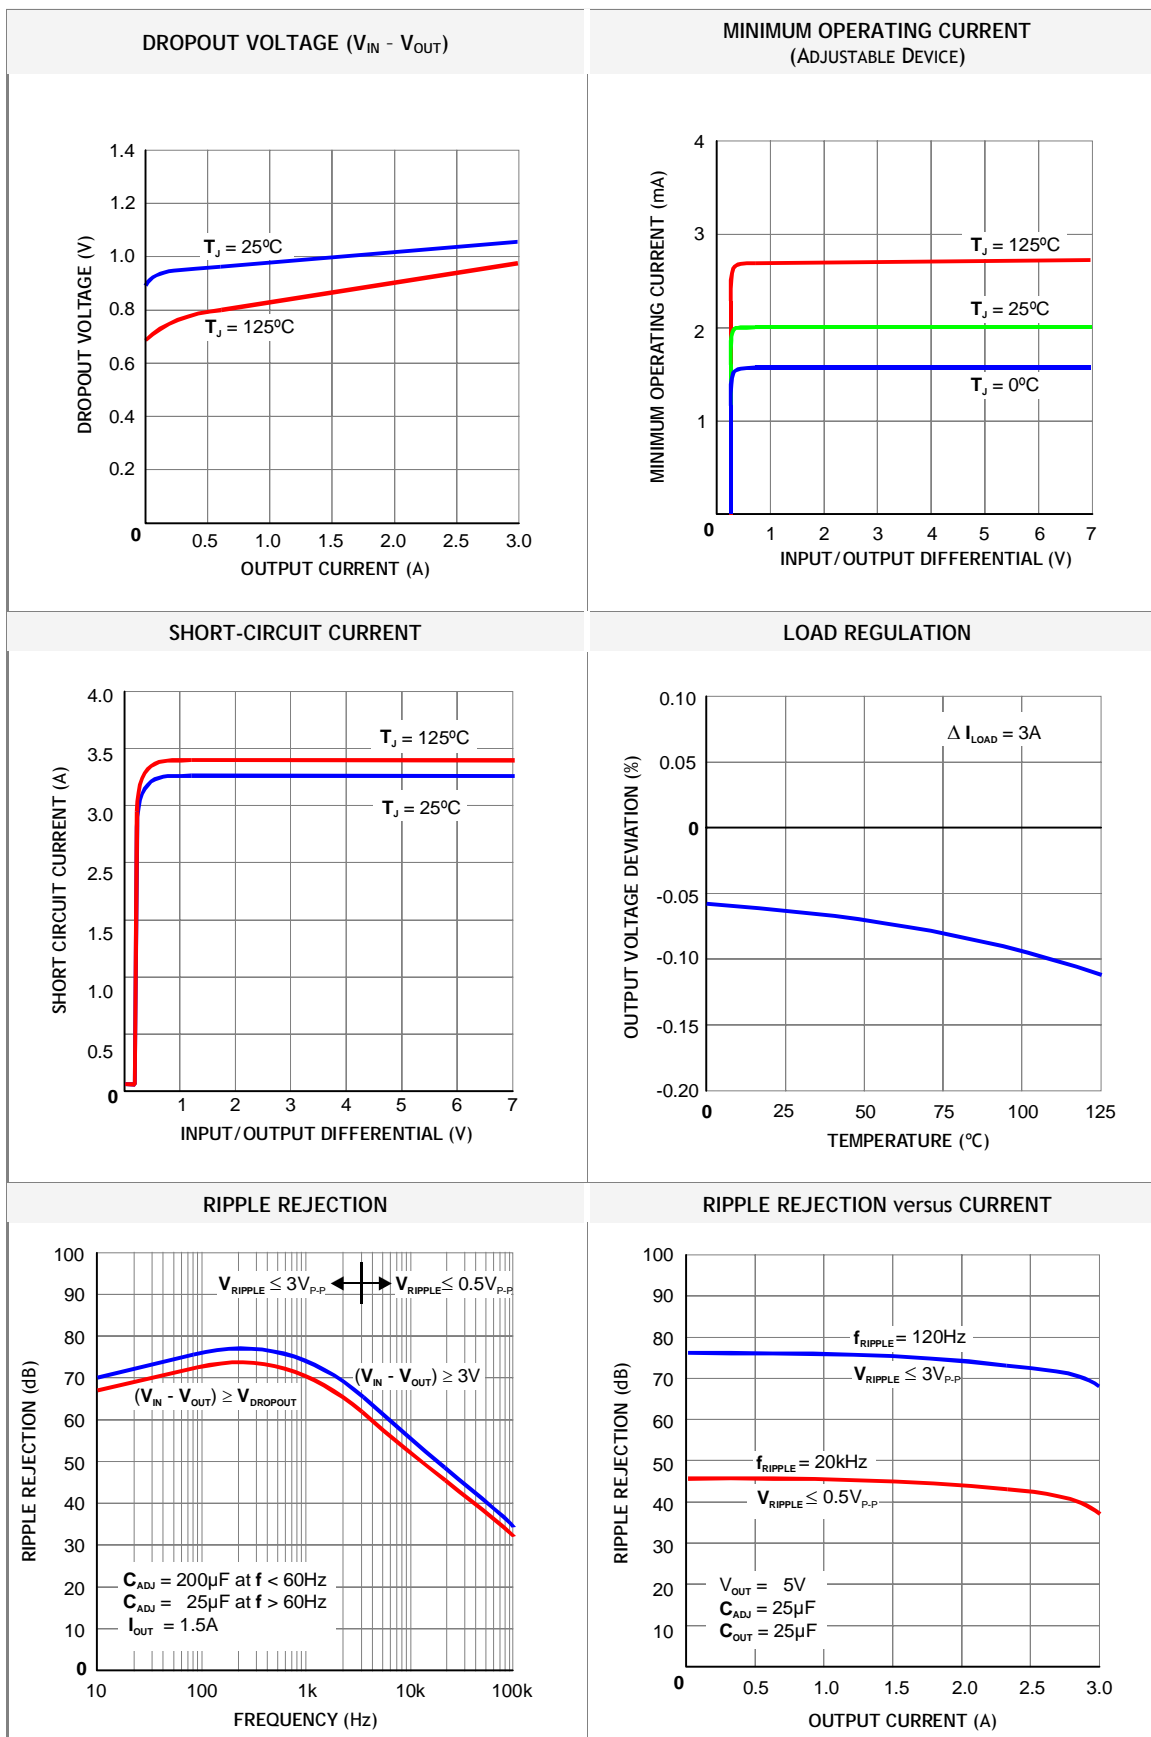



TYPICAL CHARACTERISTICS (CONTINUED)

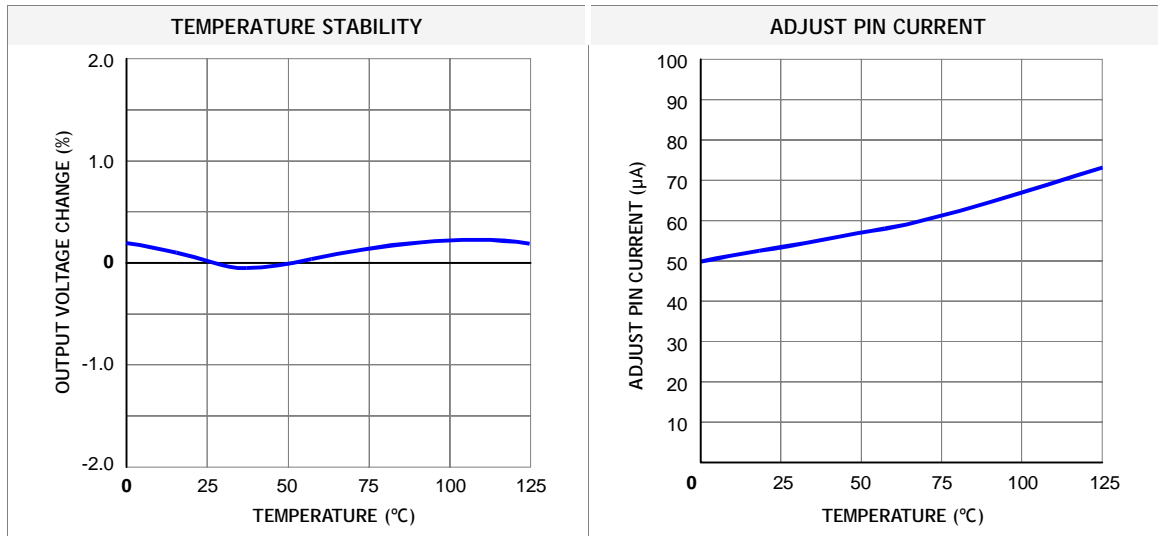

MIKRON JSC • http://www.mikron.ru • 19 August 2003


TYPICAL APPLICATIONS

<p>1.2V to 5.0V ADJUSTABLE REGULATOR</p> <p>* NEEDED IF DEVICE IS FAR FROM FILTER CAPACITOR ** $V_{OUT} = 1.25 \times (1 + (R2/R1))$</p>	<p>5V REGULATOR WITH SHUTDOWN</p>	<p>BATTERY CHARGER</p> $I_F = \frac{V_{out} - 1.25V \left(1 + \frac{R2}{R1}\right)}{-R2 \left(1 + \frac{R2}{R1}\right)}$ $\frac{\Delta I_F}{\Delta V_{out}} = \frac{1}{-R2 \left(1 + \frac{R2}{R1}\right)}$
<p>IMPROVING RIPPLE REJECTION</p> <p>* C1 IMPROVES RIPPLE REJECTION. X_C SHOULD BE = R1 AT RIPPLE FREQUENCY</p>	<p>LOW DROUPT NEGATIVE SUPPLY</p>	<p>AUTOMATIC LIGHT CONTROL</p>
<p>ACTIVE TERMINATOR FOR SCSI-2 BUS</p>		<p>BATTERY BACKED UP REGULATED SUPPLY</p>



MIKRON JSC • <http://www.mikron.ru> • 19 August 2003

TYPICAL APPLICATIONS (CONTINUED)

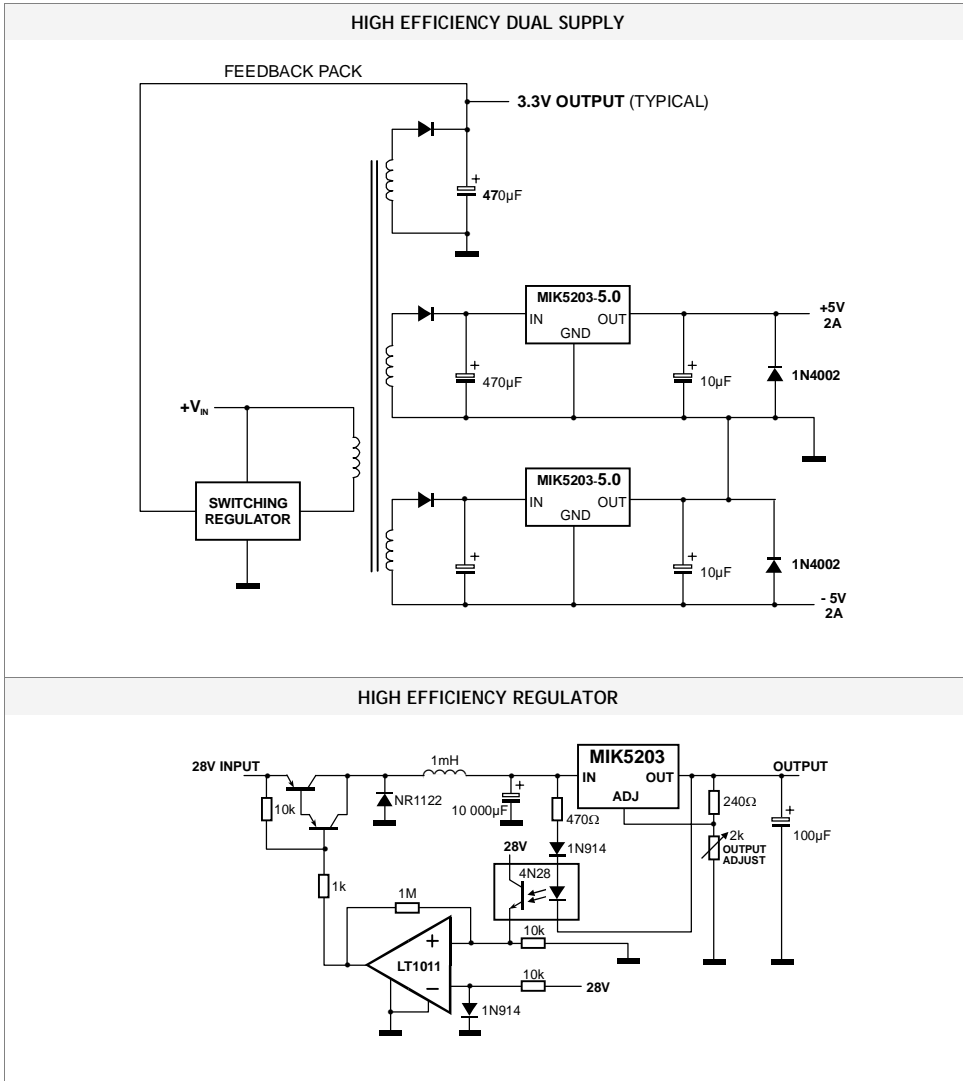



APPLICATION INFORMATION

The MIK5203 family of 3-terminal regulators are easy to use. They are protected against short circuit and thermal overloads. Thermal protection circuitry will shut down the regulator should the junction temperature exceed 170°C at the sense point. These regulators are pin compatible with older 3-terminal adjustable regulators, offer lower dropout voltage and more precise reference tolerance. Reference stability over temperature is improved over older types of regulators.

STABILITY

The MIK5203 family of regulators requires an output capacitor as part of the device frequency compensation. A minimum of 22mF of tantalum or 50mF of aluminum electrolytic is required. The ESR of the output capacitor should be less than 0.5Ω.

When using the MIK5203 adjustable device the adjust terminal can be bypassed to improve ripple rejection. When the adjust terminal is bypassed the required value of the output capacitor increases. The device will require an output capacitor of 22mF tantalum or 150mF aluminum electrolytic when the adjust pin is bypassed. Normally, capacitor values on the order of 100mF are used in the output of many regulators to ensure good load transient response with large load current changes. Output capacitance can be increased without limit and larger values of output capacitance further improve stability and transient response.

PROTECTION DIODES

Diodes between input and output are not usually needed. Only with extremely large output capacitors, such as 1000mF and larger, and with the input pin instantaneously shorted to ground can damage occur. A crowbar circuit at the input of the MIK5203 in combination with a large output capacitor could generate currents large enough to cause damage. In this case a diode from output to input is recommended, as shown in Figure 1.

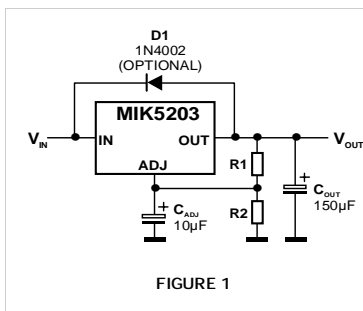


FIGURE 1

OUTPUT VOLTAGE

The MIK5203 develops a 1.25V reference voltage between the output and the adjust terminal (see

Figure 2). By placing a resistor between these two terminals, a constant current is caused to flow through R1 and down through R2 to set the overall output voltage. Normally this current is chosen to be the specified minimum load current of 10mA. Because I_{ADJ} is very small and constant when compared to the current through R1, it represents a small error and can usually be ignored. For fixed voltage devices R1 and R2 are included in the device.




FIGURE 3. BASIC ADJUSTABLE REGULATOR

LOAD REGULATION

Because the MIK5203 is a 3-terminal device, it is not possible to provide true remote load sensing. Load regulation will be limited by the resistance of the wire connecting the regulator to the load. The data sheet specification for load regulation is measured at the output pin of the device. Negative side sensing is a true Kelvin connection, with the bottom of the output divider returned to the negative side of the load. Although it may not be immediately obvious, best load regulation is obtained when the top of the resistor divider (R1) is returned directly to the output pin of the device, not to the load. This is illustrated in Figure 3. Connected as shown, R_p is not multiplied by the divider ratio. If R1 were connected to the load, the effective resistance between the regulator and the load would be:

$$R_p \times \frac{R_2 + R_1}{R_1}, \quad R_p = \text{Parasitic Line Resistance}$$

For fixed voltage devices the top of R1 is internally Kelvin connected, and the ground pin can be used for negative side sensing.

RIPPLE REJECTION

The curves for Ripple Rejection were generated using an adjustable device with the adjust pin bypassed. These curves will hold true for all values



19 August 2003

<http://www.mikron.ru>

MIKRON JSC

of output voltage. For proper bypassing, and ripple rejection approaching the values shown, the impedance of the adjust pin capacitor, at the ripple frequency, should be $< R1$. $R1$ is normally in the range of 100Ω to 200Ω . The size of the required adjust pin capacitor is a function of the input ripple frequency. At 120Hz, with $R1 = 100\Omega$, the adjust pin capacitor should be $>13\mu\text{F}$. At 10kHz only $0.16\mu\text{F}$ is needed.

For fixed voltage devices, and adjustable devices without an adjust pin capacitor, the output ripple will increase as the ratio of the output voltage to the reference voltage ($V_{\text{OUT}}/V_{\text{REF}}$). For example, with the output voltage equal to 5V, the output ripple will be increased by the ratio of 5V/1.25V. It will increase by a factor of four. Ripple rejection will be degraded by 12dB from the value shown on the curve.



PHYSICAL DIMENSIONS AND MARKING DIAGRAMS

TO-220-3 PACKAGE

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	3.75	3.85	0.147	0.151
B	15.24	15.75	0.600	0.620
C	12.47	12.9	0.491	0.508
D	9.05	9.15	0.356	0.360
E	13.00	14.00	0.511	0.551
F	1.14	1.70	0.044	0.067
G	2.40	2.72	0.094	0.107
H	2.40	2.70	0.094	0.106
J	4.40	4.60	0.173	0.181
K	0.61	0.88	0.024	0.034
L	3.50	3.93	0.137	0.154
M	0.49	0.70	0.019	0.027
N	1.23	1.32	0.048	0.051

TO-220-3

MARKING DIAGRAM



XX – output voltage (see table below)
 YY – Year
 WW – Work Week
 n – assembly location

XX	OUTPUT VOLTAGE
Blank	Adjustable
15	1.5 V
18	1.8 V
25	2.5 V
28	2.85 V
3	3.0 V
33	3.3 V
35	3.5 V
5	5.0 V

MIKRON JSC • <http://www.mikron.ru> • 19 August 2003

TO-263-3 PACKAGE

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.143	1.397	0.045	0.055
B	9.804	10.236	0.386	0.403
C	11.074	11.506	0.406	0.418
D	9.042	9.347	0.356	0.368
E	0.660	0.914	0.026	0.036
F	4.318	4.572	0.170	0.180
G	0.000	0.254	0.000	0.010
H	2.540 BSC		0.100 BSC	
J	1.295 REF		0.051 REF	
K	13.691	14.707	0.539	0.579
L	0.457	0.660	0.018	0.026
M	5° REF		5° REF	
N	2.235	2.591	0.088	0.102

TO-263-3

MARKING DIAGRAM



XX – output voltage (see table below)
 Y – Year
 WW – Work Week
 n – assembly location

XX	OUTPUT VOLTAGE
Blank	Adjustable
15	1.5 V
18	1.8 V
25	2.5 V
28	2.85 V
3	3.0 V
33	3.3 V
35	3.5 V
5	5.0 V



ORDERING INFORMATION

ORDERING NUMBER	OUTPUT VOLTAGE	PACKAGE	OPERATING TEMPERATURE	SHIPPING
MIK 5203 T	Adjustable	TO-220-3	0°C to + 70°C	50 units/Rail
MIK 5203-1.5 T	1.5 V			
MIK 5203-1.8 T	1.8 V			
MIK 5203-2.5 T	2.5 V			
MIK 5203-2.85 T	2.85 V			
MIK 5203-3.0 T	3.0 V			
MIK 5203-3.3 T	3.3 V			
MIK 5203-3.5 T	3.5 V			
MIK 5203-5.0 T	5.0 V			
MIK 5203 D2T	Adjustable	TO-263-3	0°C to + 70°C	50 units/Rail & 800 units/Reel
MIK 5203-1.5 D2T	1.5 V			
MIK 5203-1.8 D2T	1.8 V			
MIK 5203-2.5 D2T	2.5 V			
MIK 5203-2.85 D2T	2.85 V			
MIK 5203-3.0 D2T	3.0 V			
MIK 5203-3.3 D2T	3.3 V			
MIK 5203-3.5 D2T	3.5 V			
MIK 5203-5.0 D2T	5.0 V			

NOTE: The form of packing is stipulated in the contract.

The information presented in this Data sheet is believed to be accurate and reliable. Application circuits shown are typical examples illustrating the operation of the device.
In the interest of product improvement, MIKRON reserves the right to change

specifications and data without notice and can assume no responsibility for the use of any information, devices and application circuits described herein. Reference to products of other manufacturers are solely for convenience and do not imply total equivalency of design, performance, or otherwise.

MIKRON JSC Head Office

Address: 1ST Zapadny Proezd 12, Building 1, Zelenograd, Moscow, Russia, 124460
 Telephone: +7 (095) 535-23-43; 536-85-44
 Fax: +7 (095) 530-92-01
 Email: export@mikron.ru

MIKRON ShenZhen Office

Tel/Fax: +86-755-329-7574
 Voice: +86-755-329-7573
 Email: miksz@963.net