



Dimensions in mm

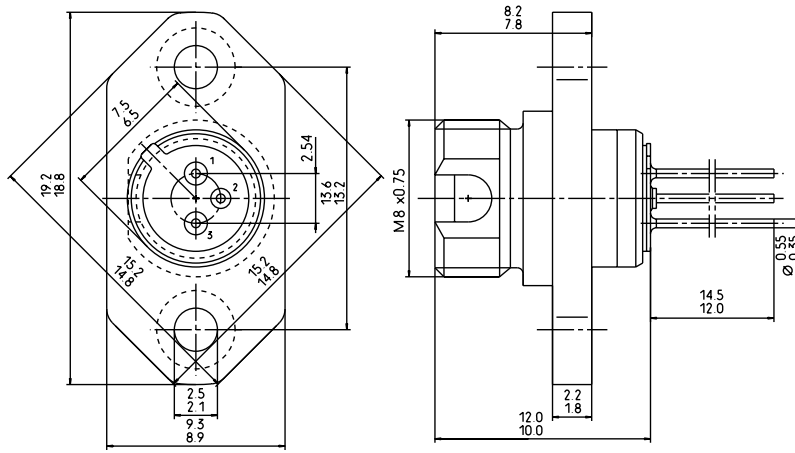


SRD00217G

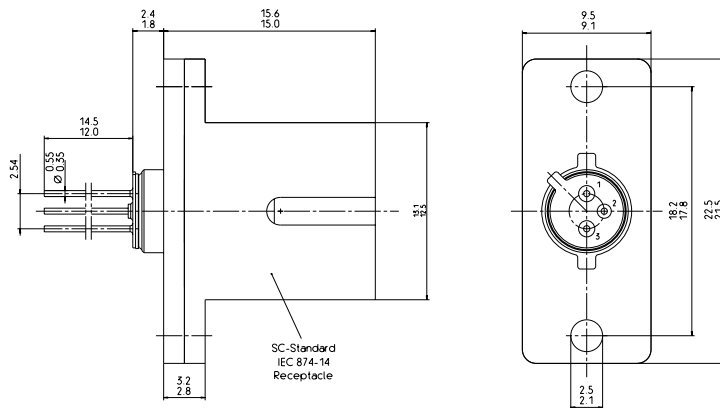

SRD00217N



SRD00217G

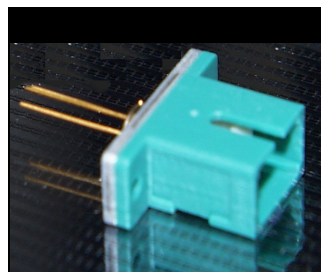

SRD00217N

FEATURES

- InGaAs/InP PIN photodiode
- Designed for applications in fiber-optics communication systems
- Sensitive receiver for 2nd and 3rd optical window (1300 nm and 1550 nm)
- Suitable for bit rates up to 2.5 Gbit/s
- For singlemode and multimode applications SONET OC-1...OC-48, SDH STM-1...STM-16

- Low junction and low package capacitance
- Fast switching times
- Low dark current
- Excellent noise immunity
- High reverse current stability from planar structure
- Hermetically sealed TO46 package

Absolute Maximum Ratings

Module

Operating temperature range at case, T_C -40°C to 85°C
 Storage temperature range, T_{stg} -40°C to 85°C
 Soldering temperature $t_{max}=10$ s,
 2 mm distance from bottom edge of case, T_S 260°C

Receiver Diode

Reverse Voltage, V_R 20 V
 Forward Current, I_F 10 mA
 Optical power into the optical port, P_{port} 1 mW

DESCRIPTION

The Infineon optical receiver module has been designed for use in optical networks and is suitable for bit rates up to max. 2.5 Gbit/s if used without any TIA.


The optical receiver module uses a high-speed PIN photodetector optional coupled with a hybrid low noise transimpedance amplifier (PIN-TIA). The optical receiver photodiode can be used for 1310 nm or 1550 nm optical communications.

The PIN photodiode is made of InGaAs/InP and has an active diameter of 75 μm . The function of the PIN and PIN-TIA optical receiver module is to detect input optical power, to transduce the incident radiation into current (PIN) and then to convert the current into a voltage (PIN-TIA).

The low input noise current density of the used transimpedance amplifiers in PIN-TIA's provides the optical receiver module, when used with appropriate filtering, with ample sensitivity for realizing minimum input power requirements. Designers of optical receivers can use the module in any application that benefits from integration of the photodiode and TIA into a TO coaxial package. Typical for such applications are receivers for digital crossconnects, digital loop carriers, add/drop-multiplexers and optical network units.

Last but not least the fast switching times, low dark currents and the packaging in a compact and hermetically sealed TO46 make the optical receivers usable in many other fiber optic receiver applications. One application is the use in a Compact realization of a transceiver in one module like the so called **BIDI®** (Fig. 1).

Figure 1. Compact realization of the transceiver in one module

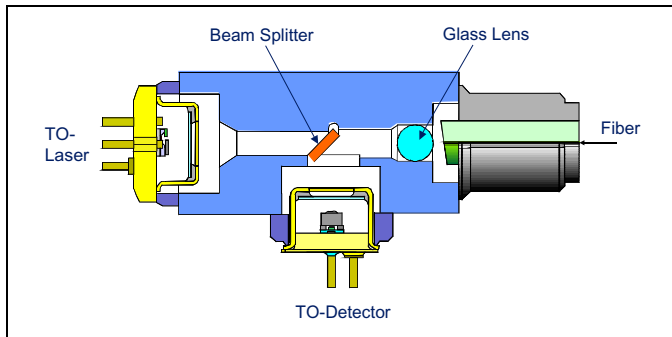

TECHNICAL DATA

All data refer to the full operating temperature range unless otherwise specified.

Receiver Diode Electro-Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units
Spectral sensitivity $V_R = -2 \text{ V}$, $P_{\text{opt}} = 1 \mu\text{W}$	$S_{1310\text{nm}}$ $S_{1550\text{nm}}$	0.8	0.9		A/W
Change in Spectral Sensitivity in Operating Temperature Range	ΔS			0.2	%/K
Dark current $V_R = 2 \text{ V}$, $P_{\text{opt}} = 0 \text{ mW}$	$I_{d25^\circ\text{C}}$			5	nA
	$I_{d85^\circ\text{C}}$			50	nA
Total Capacitance $V_R = 3 \text{ V}$, $f = 1 \text{ MHz}$, $V_{\text{RF}} = 30 \text{ mV}$	C		0.8	1	pF
Rise and fall time (10%...90%) $V_R = 5 \text{ V}$, $P_{\text{opt}} = (0.1...1) \text{ mW}$, 50Ω	t_r , t_f		200	300	ps
Cut Off Frequency $\lambda = 1310 \text{ nm}$, $V_R = 5 \text{ V}$, 50Ω	$f_{3\text{dB}}$	1			GHz
Return Loss $\lambda = 1310 \text{ nm}$	RL			-20	dB

End of Life Time Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units
Detector Dark Current $V_R = 2 \text{ V}$, $T = T_{\text{max}}$	I_R			400	nA



FIBER DATA

The mechanical fiber characteristics are described in the following table.

Fiber Characteristics

Parameter	Min.	Typ.	Max.	Units
Mode Field Diameter		50		μm
Cladding Diameter	123	125	127	
Mode Field/Cladding Concentricity Error			1	
Cladding Non-circularity			2	%
Mode Field Non-circularity			6	
Cut off Wavelength	1270			nm
Jacket Diameter	0.8		1	mm
Bending Radius	30			
Tensile Strength Fiber Case	5			N
Length	0.8		1.2	m

Pin Description

Pinning (bottom view)	Pin Description
Receiver 1	
	Pinning 1 

FLANGE OPTIONS

Model	Type
SRD00217G	SM FC Receptacle Package
SRD00217H	MM FC Receptacle Package
SRD00217N	SM SC Receptacle Package
SRD00217O	MM SC Receptacle Package
Other flanges on request	

Published by Infineon Technologies AG

© Infineon Technologies AG 2001
All Rights Reserved

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.
Terms of delivery and rights to technical change reserved.
We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.
Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact the Infineon Technologies offices or our Infineon Technologies Representatives worldwide - see our webpage at www.infineon.com/fiberoptics

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your Infineon Technologies offices.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.