



ULTRA SMALL PACKAGE VOLTAGE REGULATOR

RX5RW SERIES

OUTLINE

The RX5RW Series are CMOS-based voltage regulator ICs with high accuracy output voltage and ultra-low supply current developed. Each of these ICs consists of a driver transistor, a voltage reference unit, an error amplifier, resistors for setting output voltage and a current limit circuit.

The output voltage of these ICs is fixed with high accuracy.

Even if V_{OUT} is shorted to GND, the included current limit circuit protects the ICs from the destruction. Furthermore, RX5RWxxA/B have a chip enable function, so that the supply current on standby can be minimized.

Since the packages for these ICs are SC-82AB (Super Mini-mold) package and SON1612-6(Under Development), high density mounting of the ICs on boards is possible.

FEATURES


- Ultra-Low Supply Current Typ. $1.5\mu A$
(except pull-up/pull-down current for \overline{CE}/CE pin)
- Standby Current Typ. $0.1\mu A$
- Dropout Voltage Typ. $40mV$ ($I_{OUT}=1mA$, RX5RW30A/B)
- Low Temperature-Drift Coefficient of Output Voltage Typ. $\pm 100ppm/^{\circ}C$
- Excellent Line Regulation Typ. $0.05\% / V$
- High Accuracy Output Voltage $\pm 2.0\%$
- Ultra-Small Package SC-82AB, SON1612-6(Under Development)
- Built-in Current Limit Circuits

APPLICATIONS

- Power source for battery-powered equipment.
- Power source for cameras, VCRs, camcorders, hand-held audio instruments and hand-held communication equipment.
- Precision voltage references.

RX5RW

BLOCK DIAGRAMS

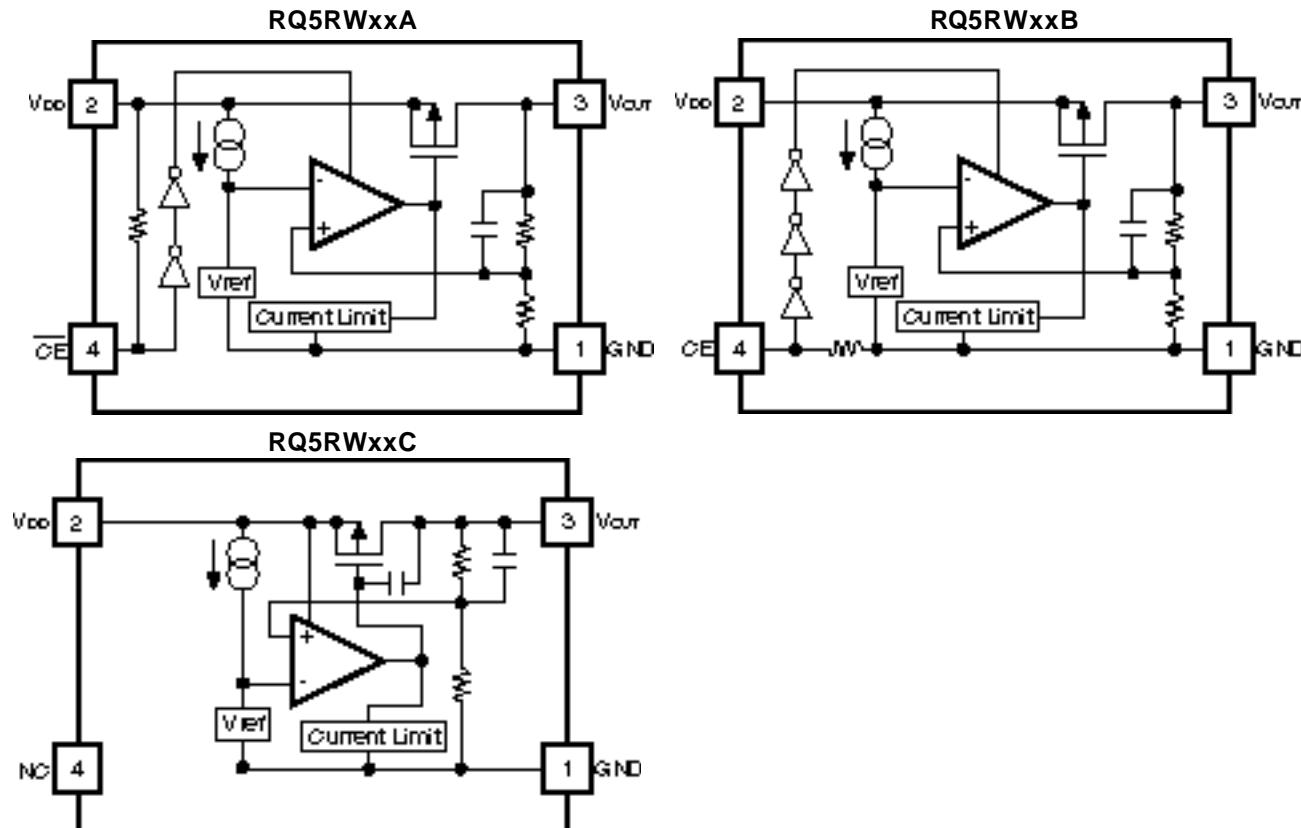

SELECTION GUIDE

The output voltage, the active type, and the packing type for the ICs can be selected at the user's request. The selection can be made with designating the part number as shown below:



RX5RW xxxx-xx ←Part Number

↑ ↑↑ ↑

a b cd e

| Code | Contents |
|------|---|
| a | Designation of Package Type Q: SC82-AB D:SON1612-6(Under Development) |
| b | Setting Output Voltage (V_{OUT}): Stepwise setting with a step of 0.1V in the range of 1.5V to 6.0V is possible. |
| c | Designation of Chip enable Active Type: A: "L" active type C: no chip enable type B: "H" active type |
| d | Designation of Packing Type: A: Taping B: Antistatic bag (for Sample only) |
| e | Designation of Taping Type: TR (refer to Taping Specifications) |

PIN CONFIGURATION

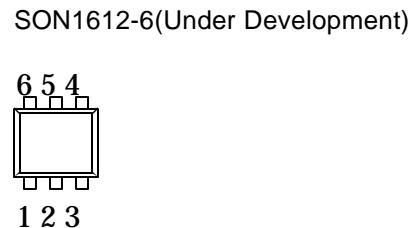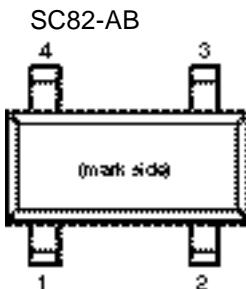

PIN DESCRIPTION

RQ5RW

| Pin No. | Symbol | Pin Description |
|---------|------------------|----------------------------------|
| 1 | GND | Ground Pin |
| 2 | V _{DD} | Input Pin |
| 3 | V _{OUT} | Output Pin |
| 4 | CE or CE or NC | Chip Enable Pin or No Connection |

RD5RW (Under Development)

| Pin No. | Symbol | Pin Description |
|---------|------------------|----------------------------------|
| 1 | CE or CE or NC | Chip Enable Pin or No Connection |
| 2 | V _{DD} | Input Pin |
| 3 | V _{OUT} | Output Pin |
| 4 | NC | No Connection |
| 5 | V _{DD} | Input Pin |
| 6 | GND | Ground Pin |

RX5RW

ABSOLUTE MAXIMUM RATINGS

| Symbol | Item | Rating | Unit |
|------------------|--|------------------------------|------|
| V _{IN} | Input Voltage | 9 | V |
| V _{CE} | Input Voltage for CE /CE Pin | -0.3 to V _{IN} +0.3 | V |
| V _{OUT} | Output Voltage | -0.3 to V _{IN} +0.3 | V |
| I _{OUT} | Output Current | 150 | mA |
| P _D | Power Dissipation(SC82-AB) | 150 | mW |
| | Power Dissipation(SON1612-6)- (Under development) | 500 ^{*Note1} | |
| T _{opt} | Operating Temperature | -40 to +85 | °C |
| T _{stg} | Storage Temperature | -55 to +125 | °C |

*Note 1: This specification is at mounted on board.

PD depends on conditions of mounting on board. This specification is based on the measurement at the condition below:


*Measurement Conditions

Environment: Mounted on board (Wind velocity 0m/s)

Board Material: FR-4 (2-layer)

Board dimensions: 40mm x 40mm x t1.6mm

Copper Area: 50%

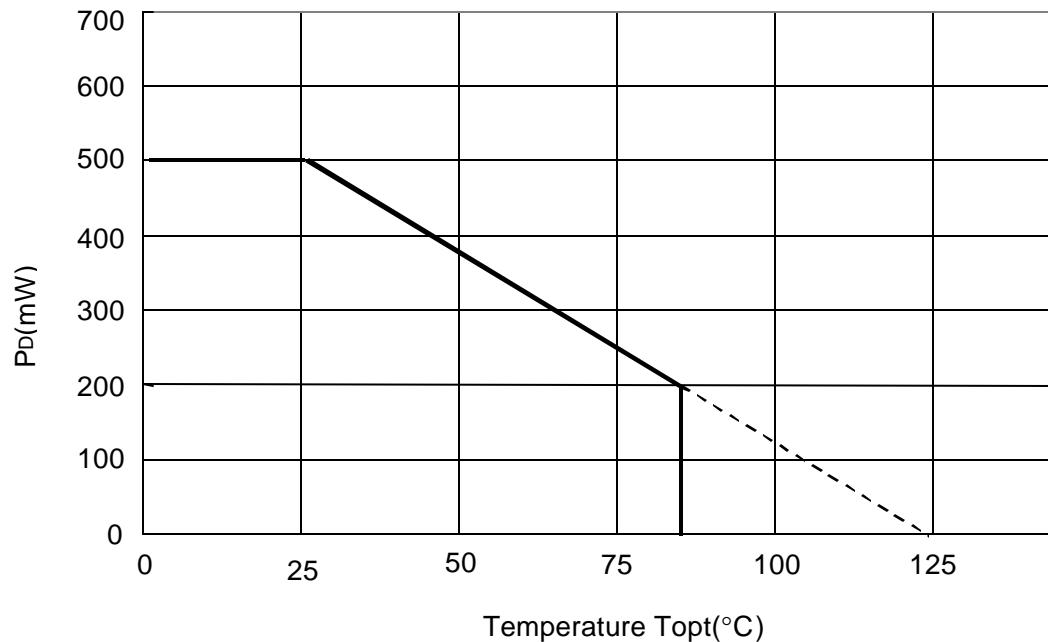

ABSOLUTE MAXIMUM RATINGS

Absolute Maximum ratings are threshold limit values that must not be exceeded even for an instant under any conditions. Moreover, such values for any two items must not be reached simultaneously. Operation above these absolute maximum ratings may cause degradation or permanent damage to the device. These are stress ratings only and do not necessarily imply functional operation below these limits.

RX5RW

ELECTRICAL CHARACTERISTICS

- RX5RW30A

Topt=25°C

| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|--|---|-------|-------|------------|------|
| V _{OUT} | Output Voltage | V _{IN} =5.0V 10µA≤I _{OUT} ≤10mA | 2.940 | 3.000 | 3.060 | V |
| I _{OUT} | Output Current | V _{IN} =5.0V | 50 | | | mA |
| ΔV _{OUT} /ΔI _{OUT} | Load Regulation | V _{IN} =5.0V, 1mA≤I _{OUT} ≤50mA | | 40 | 60 | mV |
| V _{DIF} | Dropout Voltage | I _{OUT} =1mA | | 40 | 60 | mV |
| I _{SS} | Supply Current | V _{IN} =5.0V | | 1.5 | 3.0 | µA |
| I _{standby} | Standby Current | V _{IN} =5.0V, V _{CE} =5.0V | | 0.1 | 1.0 | µA |
| ΔV _{OUT} /ΔV _{IN} | Line Regulation | I _{OUT} =1mA V _{OUT} +0.5V≤V _{IN} ≤8V | 0.00 | 0.05 | 0.20 | %/V |
| V _{IN} | Input Voltage | | | | 8.0 | V |
| ΔV _{OUT} /ΔTopt | Output Voltage Temperature Coefficient | I _{OUT} =10mA -40°C≤Topt≤85°C | | ±100 | ppm/ °C | |
| I _{lim} | Short Current Limit | V _{OUT} =0V | | 40 | | mA |
| R _{PU} | Pull up resistance for CE pin | | 1.5 | 4.0 | 12.0 | MΩ |
| V _{CEH} | CE Input Voltage "H" | | 1.5 | | | V |
| V _{CEL} | CE Input Voltage "L" | | 0.25 | | | V |

• RX5RW30B

Top=25°C

| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|--|---|-------|-------|-------|------------|
| V _{OUT} | Output Voltage | V _{IN} =5.0V 10μA≤I _{OUT} ≤10mA | 2.940 | 3.000 | 3.060 | V |
| I _{OUT} | Output Current | V _{IN} =5.0V | 50 | | | mA |
| ΔV _{OUT} /ΔI _{OUT} | Load Regulation | V _{IN} =5.0V 1mA≤I _{OUT} ≤50mA | | 40 | 60 | mV |
| V _{DIF} | Dropout Voltage | I _{OUT} =1mA | | 40 | 60 | mV |
| I _{SS} | Supply Current | V _{IN} =5.0V | | 1.5 | 3.0 | μA |
| I _{standby} | Standby Current | V _{IN} =5.0V, V _{CE} =GND | | 0.1 | 1.0 | μA |
| ΔV _{OUT} /ΔV _{IN} | Line Regulation | I _{OUT} =1mA V _{OUT} +0.5V≤V _{IN} ≤8V | 0.00 | 0.05 | 0.20 | %/V |
| V _{IN} | Input Voltage | | | | 8.0 | V |
| ΔV _{OUT} /ΔT _{opt} | Output Voltage Temperature Coefficient | I _{OUT} =1mA -40°C≤T _{opt} ≤85°C | | ±100 | | ppm/ °C |
| I _{lim} | Short Current Limit | V _{OUT} =0V | | 40 | | mA |
| R _{PD} | Pull down resistance for CE pin | | 1.5 | 4.0 | 12.0 | MΩ |
| V _{CEH} | CE Input Voltage "H" | | 1.5 | | | V |
| V _{CEL} | CE Input Voltage "L" | | 0.25 | | | V |

• RX5RW30C

| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|--|--|-------|-------|-------|------------|
| V _{OUT} | Output Voltage | V _{IN} =5.0V 10μA≤I _{OUT} ≤10mA | 2.940 | 3.000 | 3.060 | V |
| I _{OUT} | Output Current | V _{IN} =5.0V | 50 | | | mA |
| ΔV _{OUT} /ΔI _{OUT} | Load Regulation | V _{IN} =5.0V 1mA≤I _{OUT} ≤50mA | | 40 | 60 | mV |
| V _{DIF} | Dropout Voltage | I _{OUT} =1mA | | 40 | 60 | mV |
| I _{SS} | Supply Current | V _{IN} =5.0V | | 1.5 | 3.0 | μA |
| ΔV _{OUT} /ΔV _{IN} | Line Regulation | I _{OUT} =1mA 3.5V≤V _{IN} ≤8.0V | 0.00 | 0.05 | 0.20 | %/V |
| V _{IN} | Input Voltage | | | | 8.0 | V |
| ΔV _{OUT} /ΔT _{opt} | Output Voltage Temperature Coefficient | I _{OUT} =10mA -40°C≤T _{opt} ≤85°C | | ±100 | | ppm/ °C |
| I _{lim} | Short Current Limit | | | 40 | | mA |

RX5RW

ELECTRICAL CHARACTERISTICS BY OUTPUT VOLTAGE

Topt=25°C

| Part Number | Output Voltage | | | Output Current | | | Load Regulation | | | Dropout Voltage | | | |
|-------------|------------------------|-------|-------|----------------|-------------|------|------------------|-------------|------|-----------------|-------------|------|------|
| | Vout (V) | | | Iout (mA) | | | DVout/DIout (mV) | | | VDIF (mV) | | | |
| | Condi-tions | Min. | Typ. | Max. | Condi-tions | Min. | Typ. | Condi-tions | Typ. | Max. | Condi-tions | Typ. | Max. |
| RX5RW15 | | 1.470 | 1.500 | 1.530 | | | | | | | | 120 | 200 |
| RX5RW16 | | 1.568 | 1.600 | 1.632 | | | | | | | | | |
| RX5RW17 | | 1.666 | 1.700 | 1.734 | | | | | | | | 90 | 135 |
| RX5RW18 | | 1.764 | 1.800 | 1.836 | | | | | | | | | |
| RX5RW19 | | 1.862 | 1.900 | 1.938 | | | | | | | | | |
| RX5RW20 | | 1.960 | 2.000 | 2.040 | | | | | | | | | |
| RX5RW21 | | 2.058 | 2.100 | 2.142 | | | | | | | | 60 | 90 |
| RX5RW22 | | 2.156 | 2.200 | 2.244 | | | | | | | | | |
| RX5RW23 | | 2.254 | 2.300 | 2.346 | | | | | | | | 50 | 75 |
| RX5RW24 | | 2.352 | 2.400 | 2.448 | | | | | | | | | |
| RX5RW25 | | 2.450 | 2.500 | 2.550 | | | | | | | | | |
| RX5RW26 | | 2.548 | 2.600 | 2.652 | | | | | | | | | |
| RX5RW27 | | 2.646 | 2.700 | 2.754 | | | | | | | | | |
| RX5RW28 | | 2.744 | 2.800 | 2.856 | | | | | | | | | |
| RX5RW29 | | 2.842 | 2.900 | 2.958 | | | | | | | | 40 | 60 |
| RX5RW30 | | 2.940 | 3.000 | 3.060 | | | | | | | | | |
| RX5RW31 | | 3.038 | 3.100 | 3.162 | | | | | | | | | |
| RX5RW32 | | 3.136 | 3.200 | 3.264 | | | | | | | | | |
| RX5RW33 | | 3.234 | 3.300 | 3.366 | | | | | | | | | |
| RX5RW34 | VIN- VOUT = 2.0V | 3.332 | 3.400 | 3.468 | | | | | | | | 35 | 55 |
| RX5RW35 | | 3.430 | 3.500 | 3.570 | | | | | | | | | |
| RX5RW36 | | 3.528 | 3.600 | 3.672 | | | | | | | | | |
| RX5RW37 | | 3.626 | 3.700 | 3.774 | | | | | | | | | |
| RX5RW38 | | 3.724 | 3.800 | 3.876 | | | | | | | | | |
| RX5RW39 | | 3.822 | 3.900 | 3.978 | | | | | | | | | |
| RX5RW40 | | 3.920 | 4.000 | 4.080 | | | | | | | | | |
| RX5RW41 | 10μA≤ Iout≤ 10mA | 4.018 | 4.100 | 4.182 | | | | | | | | | |
| RX5RW42 | | 4.116 | 4.200 | 4.284 | | | | | | | | | |
| RX5RW43 | | 4.214 | 4.300 | 4.386 | | | | | | | | | |
| RX5RW44 | | 4.312 | 4.400 | 4.488 | | | | | | | | | |
| RX5RW45 | | 4.410 | 4.500 | 4.590 | | | | | | | | | |
| RX5RW46 | | 4.508 | 4.600 | 4.692 | | | | | | | | | |
| RX5RW47 | | 4.606 | 4.700 | 4.794 | | | | | | | | | |
| RX5RW48 | | 4.704 | 4.800 | 4.896 | | | | | | | | | |
| RX5RW49 | | 4.802 | 4.900 | 4.998 | | | | | | | | | |
| RX5RW50 | | 4.900 | 5.000 | 5.100 | | | | | | | | | |
| RX5RW51 | | 4.998 | 5.100 | 5.202 | | | | | | | | | |
| RX5RW52 | | 5.096 | 5.200 | 5.304 | | | | | | | | | |
| RX5RW53 | | 5.194 | 5.300 | 5.406 | | | | | | | | | |
| RX5RW54 | | 5.292 | 5.400 | 5.508 | | | | | | | | | |
| RX5RW55 | | 5.390 | 5.500 | 5.610 | | | | | | | | | |
| RX5RW56 | | 5.488 | 5.600 | 5.712 | | | | | | | | | |
| RX5RW57 | | 5.586 | 5.700 | 5.814 | | | | | | | | | |
| RX5RW58 | | 5.684 | 5.800 | 5.916 | | | | | | | | | |
| RX5RW59 | | 5.782 | 5.900 | 6.018 | | | | | | | | | |
| RX5RW60 | | 5.880 | 6.000 | 6.120 | | | | | | | | | |


ELECTRICAL CHARACTERISTICS BY OUTPUT VOLTAGE

(common characteristics)

Topt=25°C

| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------------|--|---|------|------|------|------------|
| Iss | Supply Current | V _{IN} =setV _{OUT} +2.0V | | 1.5 | 3.0 | μA |
| Istandby | Standby Current | V _{IN} =setV _{OUT} +2.0V V _{CE} =V _{IN} (RX5RWxxA), V _{CE} =GND (RX5RWxxB) | | 0.1 | 1.0 | μA |
| ΔV _{OUT} /ΔV _{IN} | Line Regulation | I _{OUT} =1mA setV _{OUT} +0.5V≤V _{IN} ≤8V | 0.00 | 0.05 | 0.20 | %/V |
| V _{IN} | Input Voltage | | | | 8.0 | V |
| ΔV _{OUT} /ΔTopt | Output Voltage Temperature Coefficient | I _{OUT} =10mA -40°C≤Topt≤85°C | | ±100 | | ppm/ °C |
| Ilim | Short Current Limit | V _{OUT} =0V | | 40 | | mA |
| R _{PU} /R _{PD} | CE Pull-up / CE Pull-down Resistance | applied to A/B version | 1.5 | 4.0 | 12.0 | MΩ |
| V _{CEH} | CE /CE Input Voltage "H" | applied to A/B version | 1.5 | | | V |
| V _{CEL} | CE /CE Input Voltage "L" | applied to A/B version | | | 0.25 | V |

OPERATION

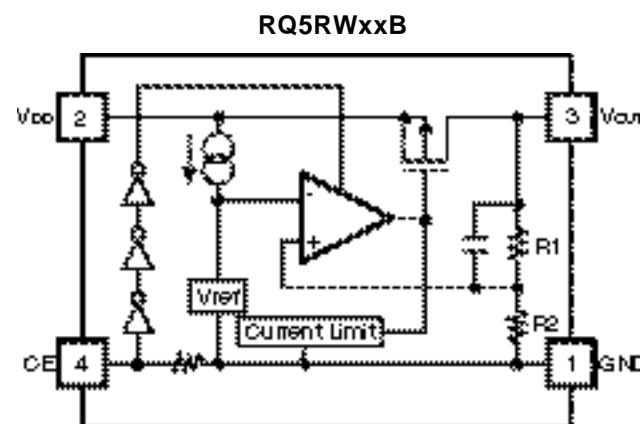


In these ICs, output voltage V_{OUT} is detected by Feedback Registers R1, R2, and the detected output voltage is compared with a reference voltage by the error amplifier, so that a constant voltage is output.


A current limit circuit working for short protect, and a chip enable circuit are included.

RX5RW


TEST CIRCUITS

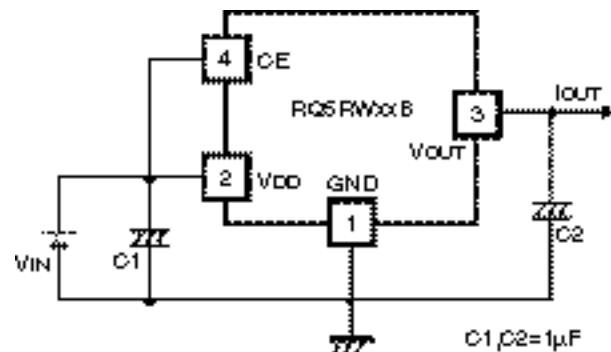


Standard Test Circuit

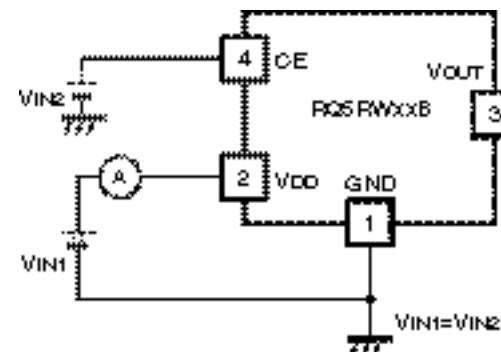

Test Circuit for Supply Current

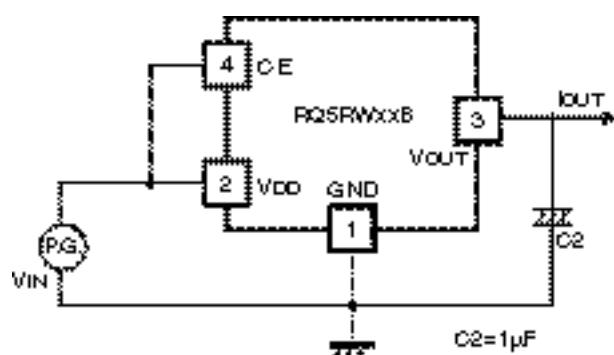

Test Circuit for Ripple Rejection and Line
Transient Response

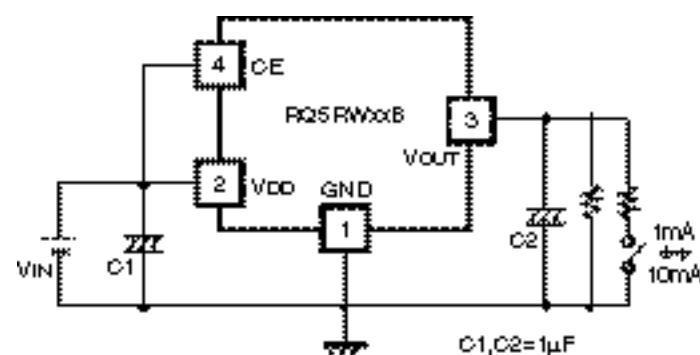


Test Circuit for Load Transient Response


TYPICAL CHARACTERISTICS

- 1) Output Voltage vs. Output Current


RX5RW30B

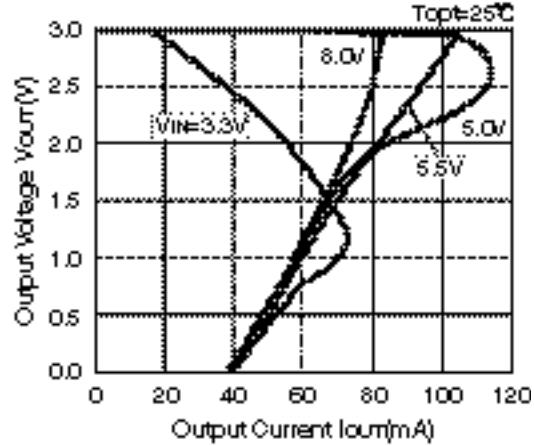


RX5RW30B

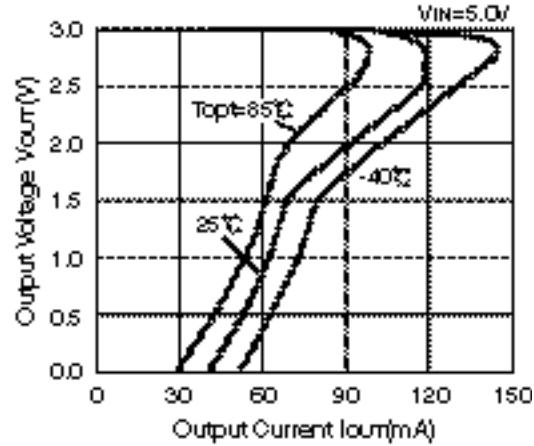


RX5RW40B

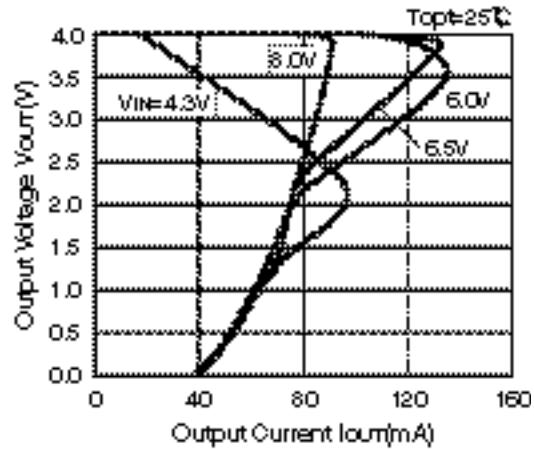


RX5RW40B

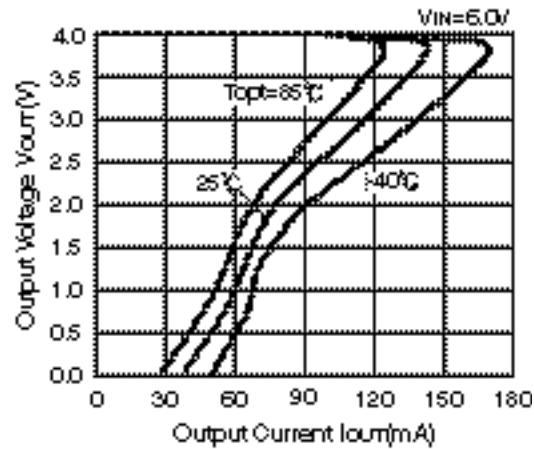

RX5RW50B

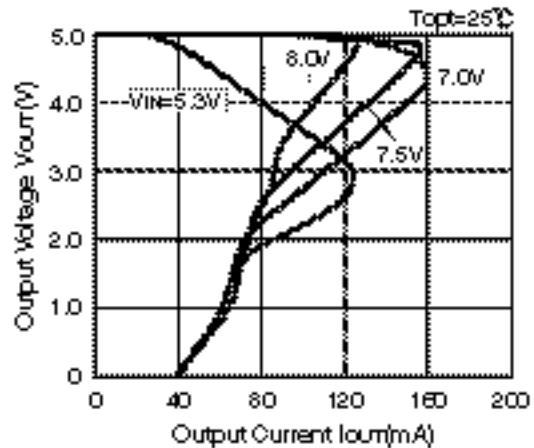


RX5RW50B

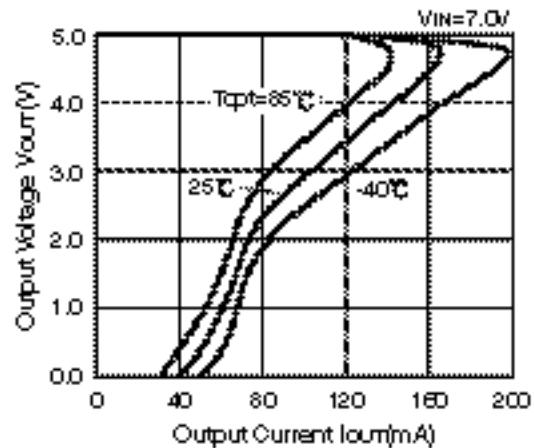


RX5RW

2) Output Voltage vs. Input Voltage


RX5RW30B

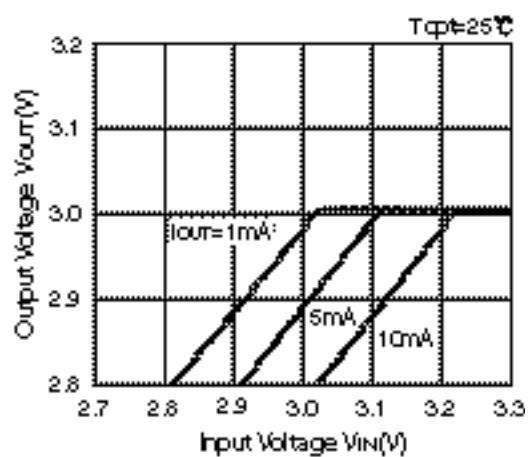


RX5RW30B

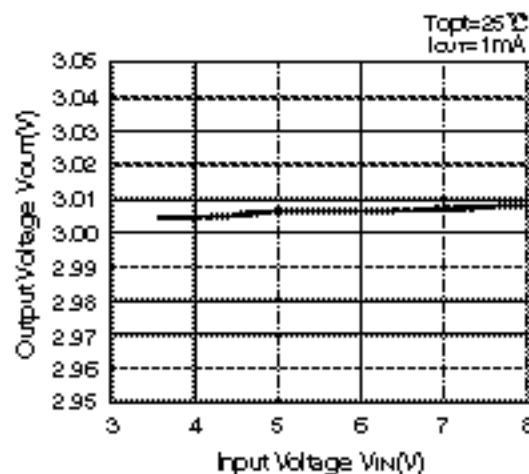


RX5RW40B

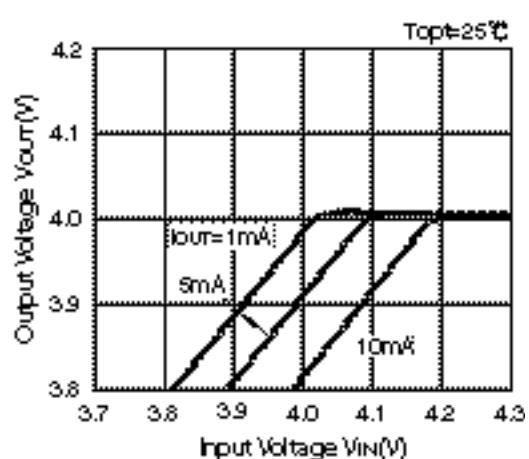


RX5RW40B

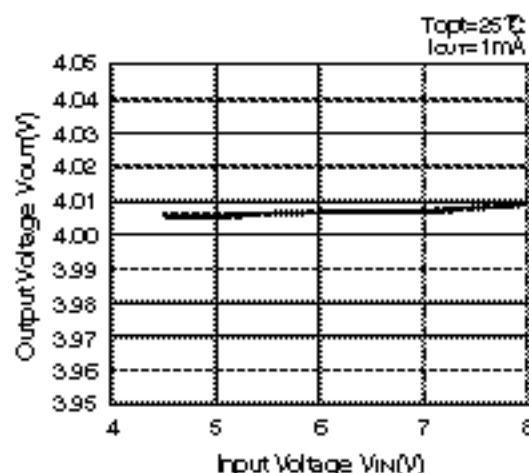




RX5RW50B

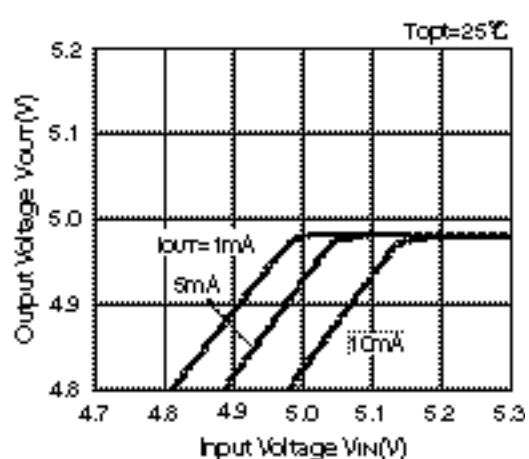



RX5RW50B

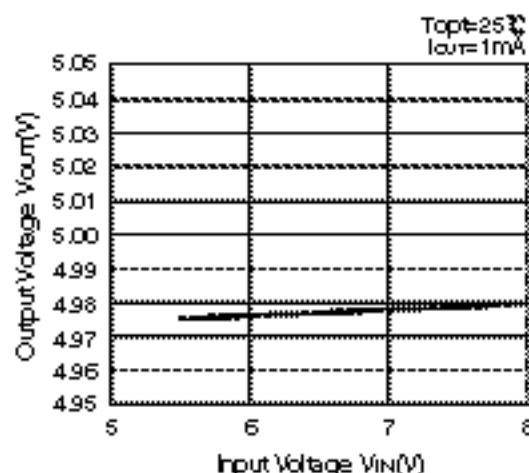


3) Dropout Voltage vs. Output Current

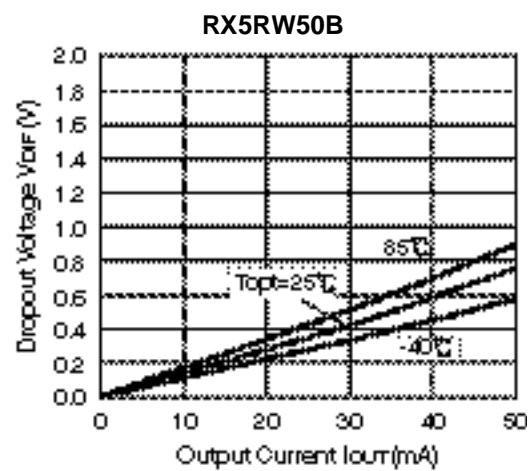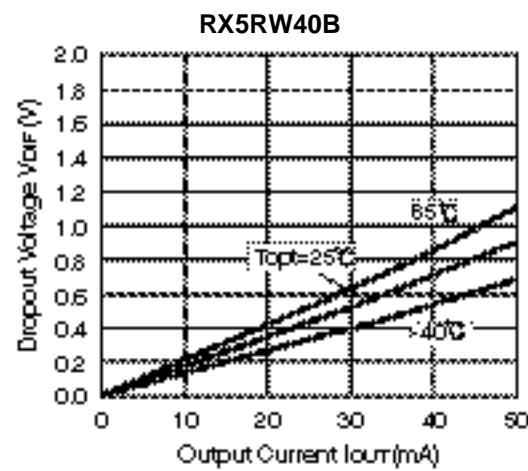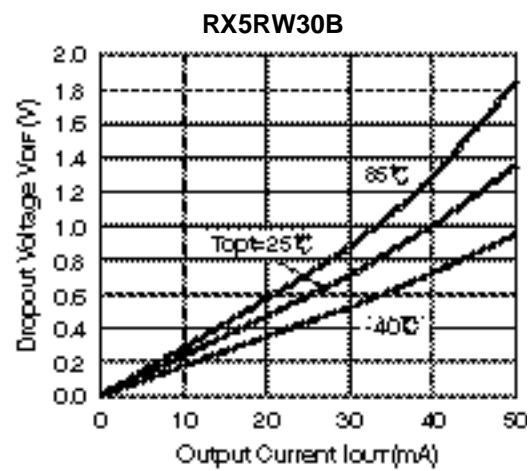




4) Output Voltage vs. Temperature

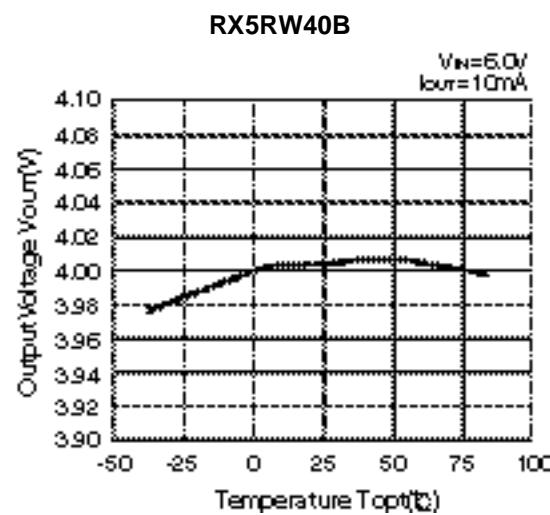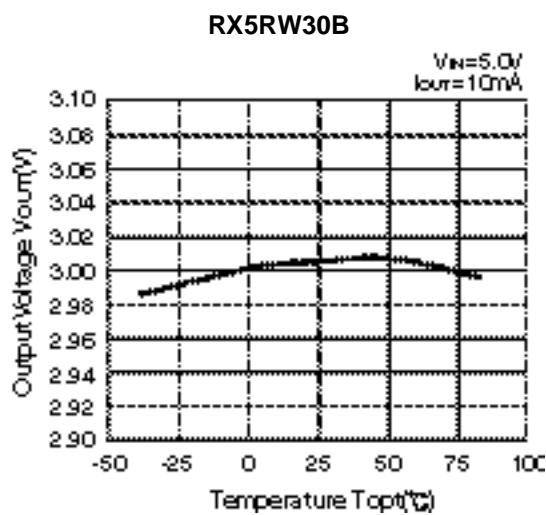




RX5RW

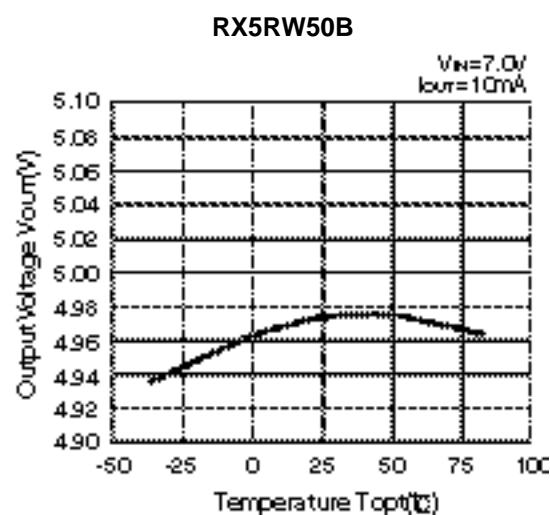


- 5) Supply Current vs. Input Voltage

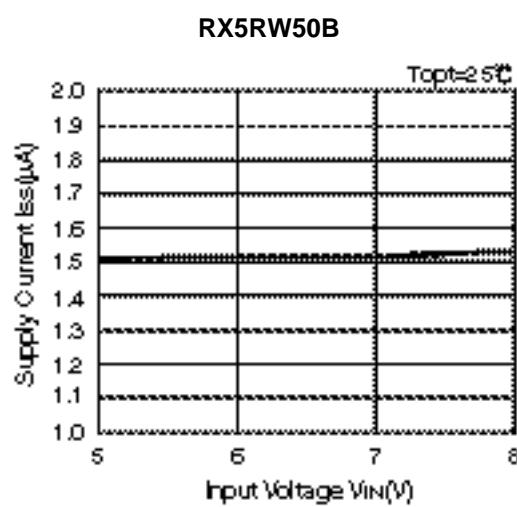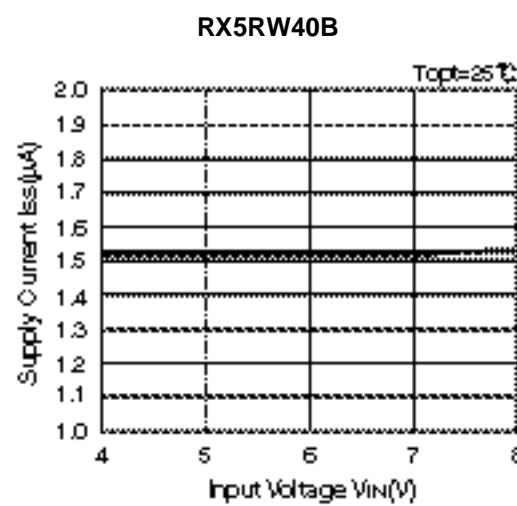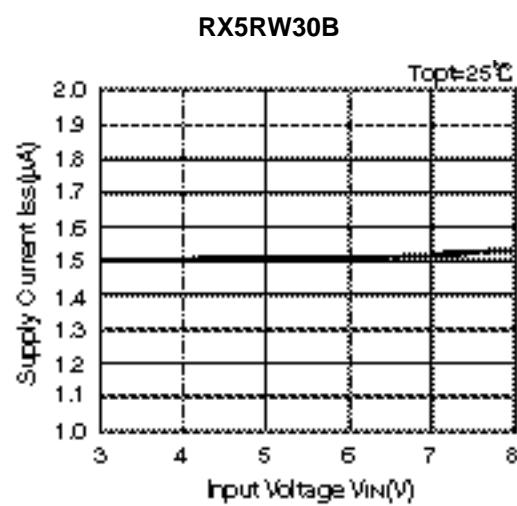

6) Supply Current vs. Temperature

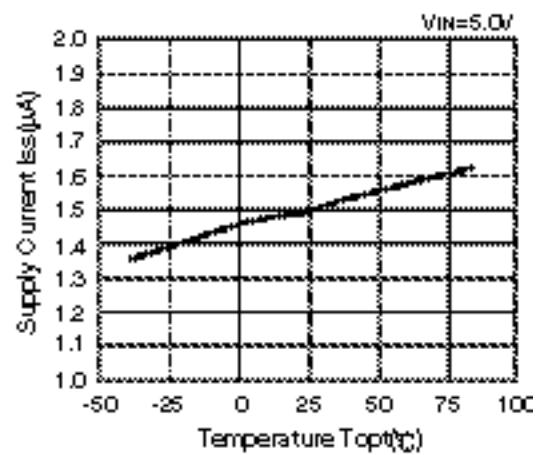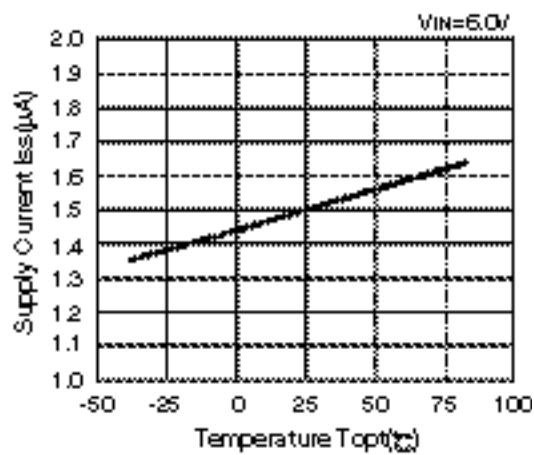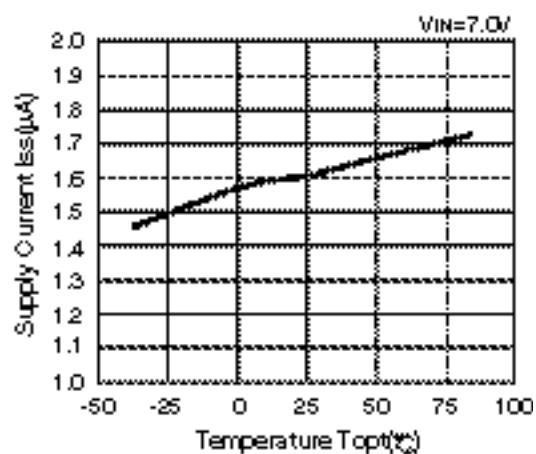RX5RW30B**RX5RW40B****RX5RW50B**


7) Dropout Voltage vs. Set Output Voltage

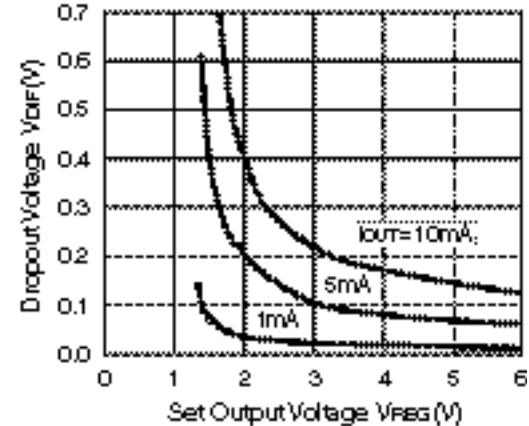RX5RWxxB


RX5RW

8) Line Transient Response


RX5RW30B

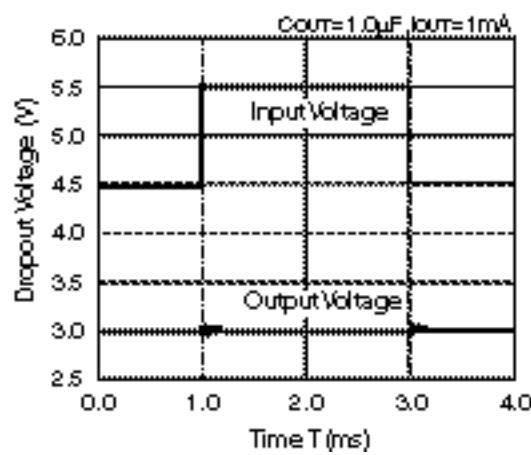


RX5RW30B

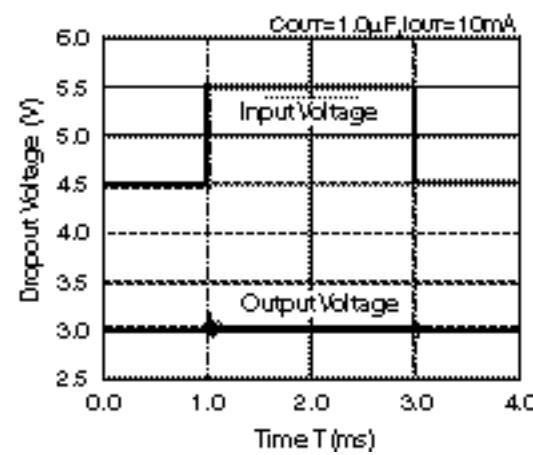


RX5RW40B

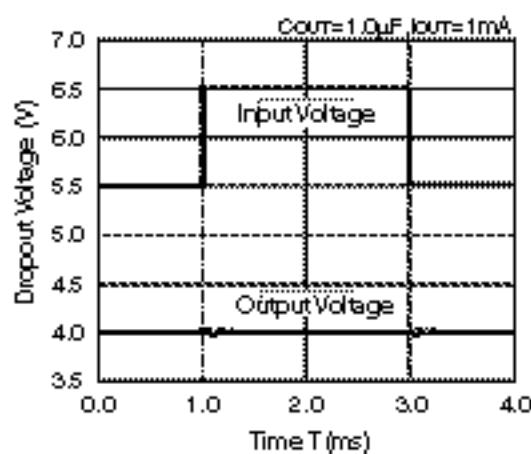


RX5RW40B

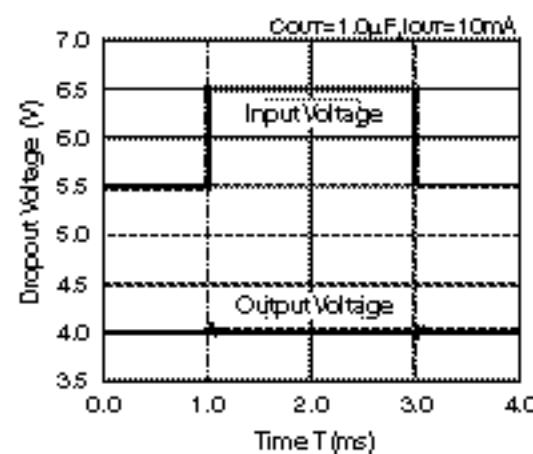


RX5RW50B

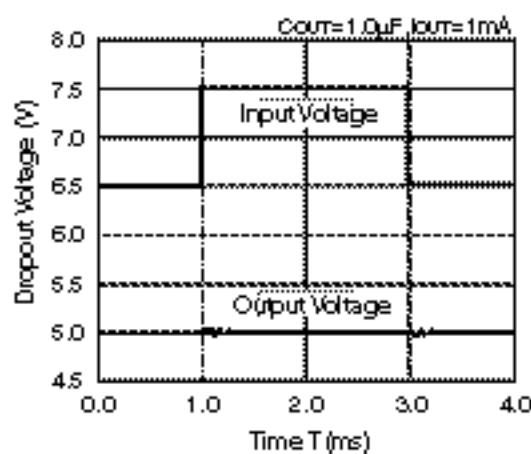

RX5RW50B

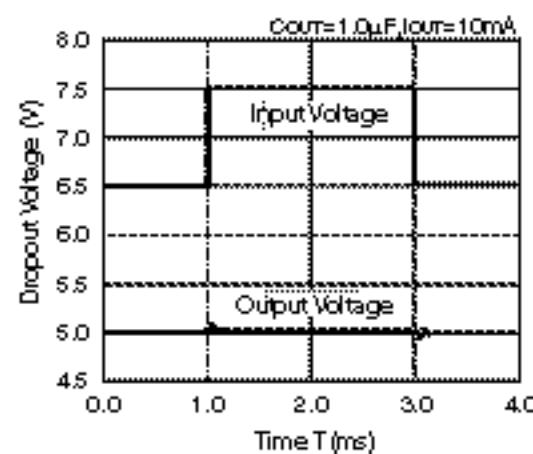


9) Load Transient Response

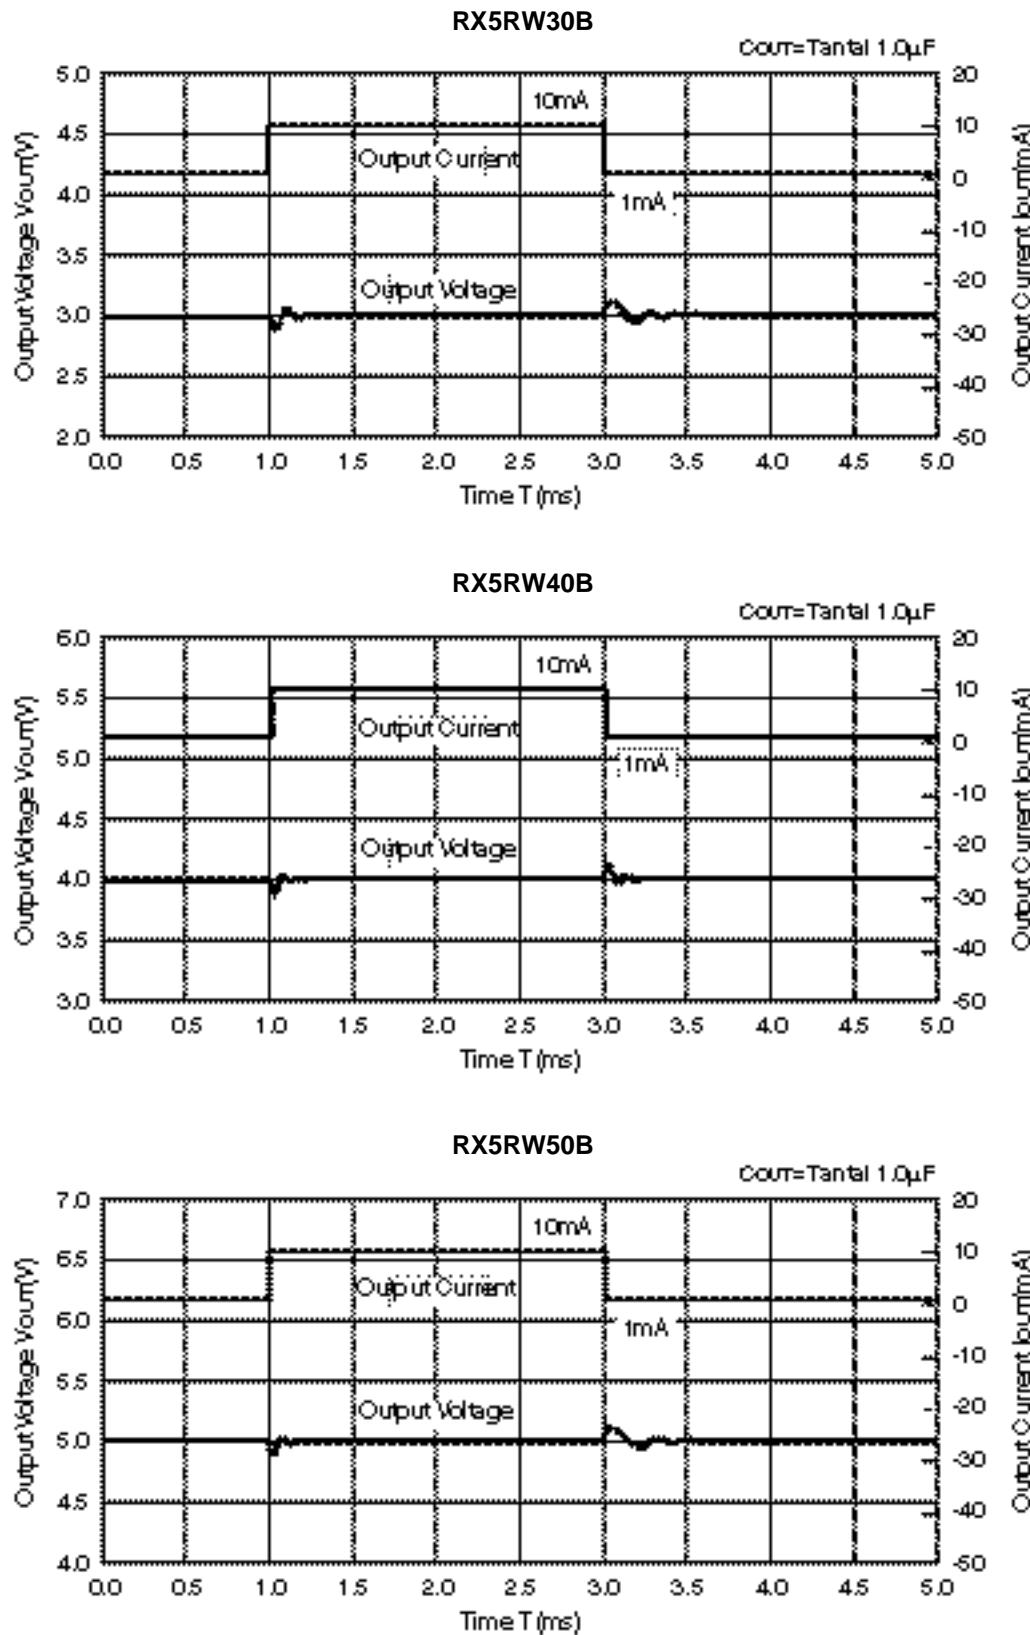


RX5RW

10) Ripple Rejection


RX5RW30B

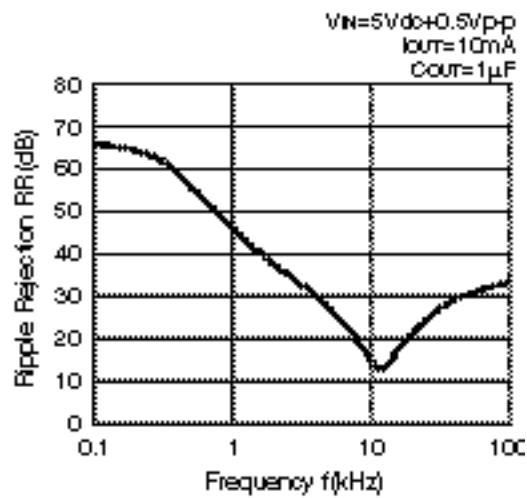


RX5RW40B

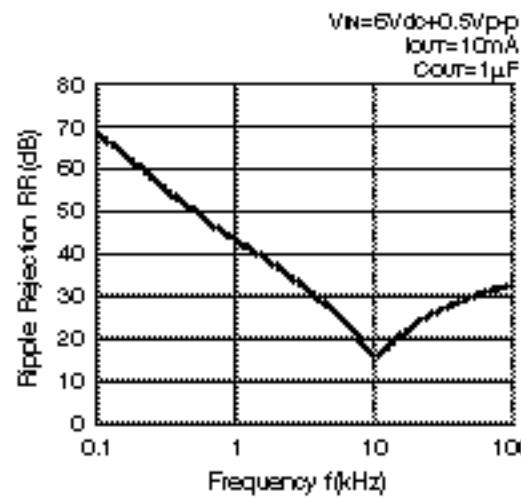

RX5RW50B

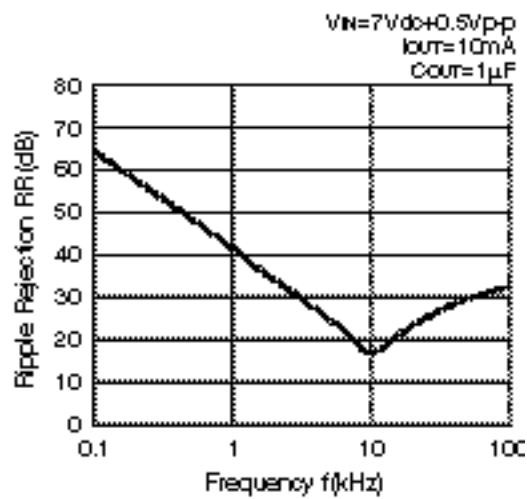

TYPICAL APPLICATION

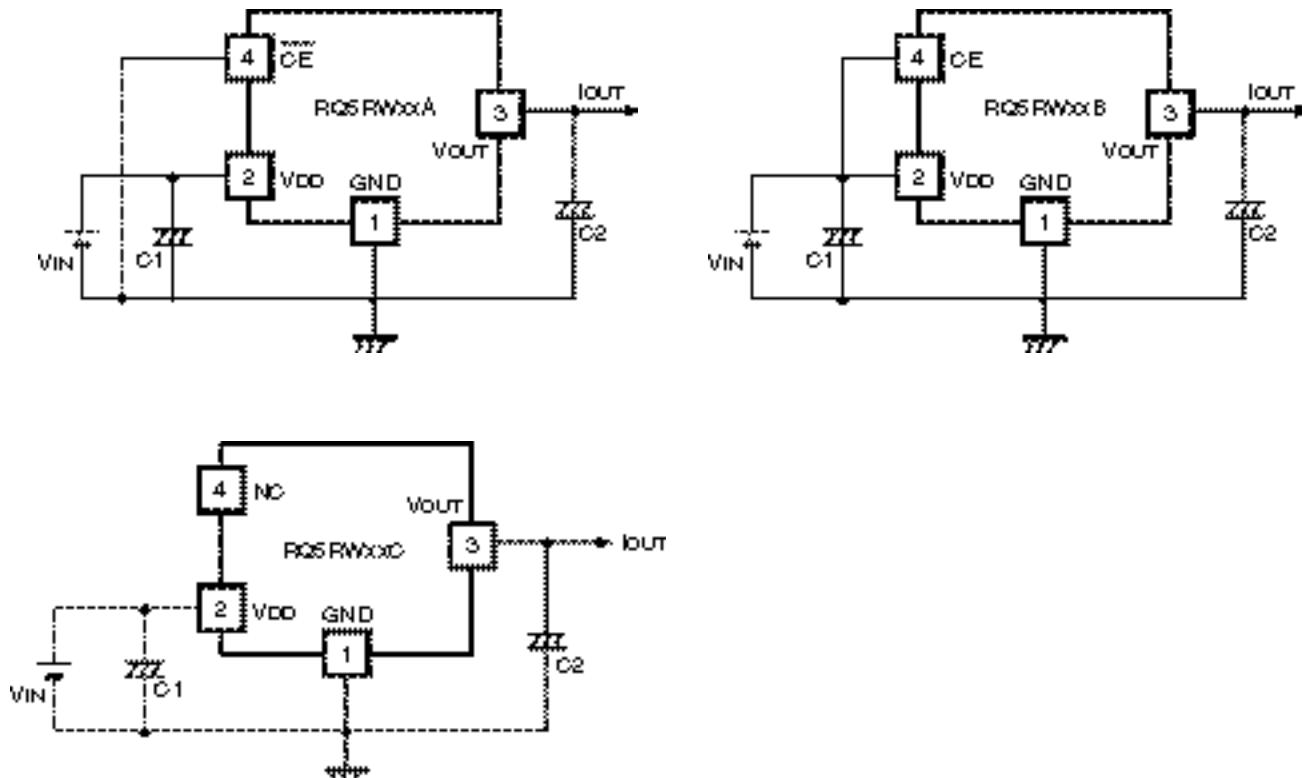

In RX5RW Series, a constant voltage can be obtained without using capacitors, C1 and C2. However, when the wire connected V_{IN} is long, use capacitor C1. Output noise can be reduced with using capacitor 2.

Insert capacitors C1 and C2 with the capacitance of $0.1\mu F$ to $0.22\mu F$ between input/output pins and GND pin with minimum wiring.