

LQ190E1LW01

TFT-LCD Module

Spec. Issue Date: May 11, 2005

No: LD17443

PREPARED BY : DATE	SHARP Mobile Liquid Crystal Display GROUP SHARP CORPORATION SPECIFICATION	SPEC No. LD17443
APPROVED BY : DATE		FILE No.
		ISSUE : May.11.2005
		PAGE : 38 pages
		APPLICABLE GROUP Mobile Liquid Crystal Display Group

DEVICE SPECIFICATION

TFT-LCD Module

MODEL No.

LQ190E1LW01

(FLC48SXC8V-11AA)

These parts have corresponded with the RoHS directive.

CUSTOMER : _____

☐ CUSTOMER'S APPROVAL

DATE _____

BY _____

PRESENTED

BY

T. Yatsui

Department general manager

Product Quality Assurance DEPT. III Mobile LCD Design Center III

Mobile Liquid Crystal Display Group Engineering Department II

SHARP Corporation

BY

T. Naka

Division deputy general manager of

Mobile LCD Design Center III

Engineering Department II

Mobile LCD Design Center III

Mobile Liquid Crystal Display Group

SHARP Corporation

A

B

C

D

E

F

1

TABLE OF CONTENTS

1. APPLICATIONS	3
2. PRODUCT NAME AND MODEL NUMBER	3
2-1.Product Name	3
2-2.Model Number	3
3. OVERVIEW	3
4. CONFIGURATION	3
5. MECHANICAL SPECIFICATIONS	4
6. ABSOLUTE MAXIMUM RATING	5
7. RECOMMENDED OPERATING CONDITIONS	5
8. ELECTRICAL SPECIFICATIONS	6
9. OPTICAL SPECIFICATIONS	8
10. INTERFACE SPECIFICATIONS	12
10-1.Signal Descriptions	12
10-2.LVDS Data Assignment	13
10-3. Color Data Assignment	15
10-4. Input Signal Timing	16
10-5. Correspondence between Data and Display Position	18
10-6.Power Supply Sequence	18
11. BACK-LIGHT SPECIFICATIONS	19
11-1.Pin configuration for Back-light	19
11-2.Life	19
11-3.Lamp assembly set	19
12. APPEARANCE SPECIFICATIONS	20
12-1.Appearance	20
12-2.Dot defects	21
13. ENVIRONMENTAL SPECIFICATIONS	22
14. INDICATIONS	23
15. PACKAGING	23
15-1.Packing Specifications	23
15-2.Packing Method	23
16. WARRANTY	29
17. PRECAUTIONS	29
18. PRECAUTIONS FOR USE	36
19. MISCELLANEOUS	36

DOCUMENT CONTROL SECTION

DATE

						TITLE		LQ190E1LW01	
								(FLC48SXC8V-11AA)	
						DRAW. NO.		LD17443	
								CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		SHARP CORPORATION		Sheet
	DESIG.			CHECK			APPR.		2 /

1. APPLICATION

This specification is applied to the 19-inch SXGA supported TFT-LCD module.

2. PRODUCT NAME AND MODEL NUMBER

2-1 Product Name : LCD Module

2-2 Model Name : LQ190E1LW01
(FLC48SXC8V-11AA)

3. OVERVIEW

This LCD module has a TFT active matrix type liquid crystal panel 1280x1024 pixels, and diagonal size of 48cm(19-inch). This LCD has a LVDS dual interface and can display 16,777,216 colors.

The power supply of this LCD module is +5V DC voltage.

4. CONFIGURATION

This LCD module consists of a color TFT-LCD panel that is mounted with TFT driver ICs and a cold-cathode fluorescent tube back-light.

The inverter for the back-light is not included.

Figure 4-1 shows a block diagram of this LCD module.

DOCUMENT CONTROL SECTION

DATE

						TITLE		LQ190E1LW01	
								(FLC48SXC8V-11AA)	
						DRAW. NO.		LD17443	
								CUST.	
07	20050420					The model name was changed.			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		SHARP CORPORATION		3 /
	DESIG.			CHECK					



Table 5-1 shows the mechanical specifications of this LCD module.

Item	Specifications	Unit	Remark
Dimensions	404.2x330x20(TYP.)	mm	Edge type back-light is used. (CCFLx4) Without inverter. For details on dimensions, see dimensional outline drawing. (Figure 20-1,2) Excluding inverter.
Display Resolution	(1280x3)x1024	—	
Display Dot Area	376.32x301.056	mm	
Dot Pitch	(0.098x3)x0.294	mm	
Pixel Aspect Ratio	1:1	—	
Weight	2,800 MAX.	g	
FG-SG	Short circuit	—	

						TITLE							LQ190E1LW01 (FLC48SXC8V-11AA)		
						DRAW. NO.							LD17443		CUST.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION							SHARP CORPORATION		STRUCTURE	4 /
	DESIG.			CHECK				APPR.							

6. ABSOLUTE MAXIMUM RATING

Table 6-1 shows the absolute maximum rating of this LCD module.

Table 6-1 Absolute Maximum Rating

Item	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Supply Voltage	V _{CC}	Ta=25°C	−0.3	—	6.0	V
Input Signal Voltage (LVDS signal, PD,SEL LVDS)	V _{IN}	Ta=25°C	−0.3	—	3.6	V

7. RECOMMENDED OPERATING CONDITIONS

Table 7-1 shows the recommended operating conditions of this LCD module.

Table 7-1 Recommended Operating Conditions

Item		Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage(Logic)		V _{CC}	4.75	—	5.25	V
Ripple Voltage	V _{CC}	V _{RP}	—	—	0.1	V

DATE	DOCUMENT CONTROL SECTION
------	--------------------------

						TITLE		LQ190E1LW01	
								(FLC48SXC8V-11AA)	
						DRAW. NO.		LD17443	
								CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		SHARP CORPORATION		5 /
DESIG.			CHECK			APPR.			

8. ELECTRICAL SPECIFICATIONS

Table 8-1 shows the electrical specifications of this LCD module. Figure 8-1 shows the measurement circuit. Figure 8-2(A) shows the equivalent circuit of the logic signal input area. Figure 8-2(B) shows the equivalent circuit of the supply voltage Input area.

Table 8-1 Electrical Specifications

Item	Symbol	Condition	MIN.	TYP.	MAX.	Unit	Remark
Differential-input Voltage (Hign)	V _{IH}	V _{CM} =+1.2V	—	—	100	mV	
Differential-input Voltage (Low)	V _{IL}		-100	—	—	mV	
Input Voltage (High)	V _{IH}	V _{CC} =+5.0±0.25V V _{SS} =0V DCLK=54MHz Ta=25° C	2.0	—	3.3	V	PD SEL LVDS
Input Voltage (Low)	V _{IL}		0	—	0.8	V	
Supply Current	I _{CC}		—	900	1500	mA	*1
Supply Rush Current	I _{SCC}		—	—	3.5	A	*2
Supply Rush Current Duration(1.5A excess)	T _{SCC}		—	—	1.0	ms	
B A C K	CCFL Turn on Voltage	V _S	f _L =50kHz, Ta=25°C	—	1400	1600	V _{rms}
		V _S	f _L =50kHz, Ta=0°C	—	1500	1600	
L I G H T	Lighting Voltage	V _L	f _L =50kHz I _L =7mA	—	750	—	V _{rms}
D (*3)	Lighting Frequency	f _L	V _L =750V _{rms}	40	50	60	kHz
	Tube Current	I _L	f _L =50kHz V _L =750V _{rms}	4	7	8	mArms *4

(*1) Typical current situation : Color bar pattern. V_{CC}=5.0V
Maximum current situation : White pattern. V_{CC}=4.75V
Without rush current.

(*2) These items prescribe the rush current for starting internal DC/DC.
Charging current to capacitors of V_{CC} is not prescribed.

(*3) Back-light specifications are valid when using a suitable inverter such as the LQ0DDJ5006 (FLCV-13)

(*4) Tube current (I_L) shows the value of the current that is consumed at one lamp.
This LCD module has 4 lamps. Each 2 lamps are placed at upper side and lower side of the display.
2 lamps is connected in parallel. Each low voltage terminals are connected with separate cable to Back-light connector.

DOCUMENT CONTROL SECTION

DATE

						TITLE	LQ190E1LW01	
							(FLC48SXC8V-11AA)	
						DRAW. NO.	LD17443	
							CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.		DESCRIPTION		
						SHARP CORPORATION		
DESIG.			CHECK					6 /

A



B

C



D



E

F

9. OPTICAL SPECIFICATIONS

Table 9-1 shows the optical specifications of this LCD module.

Table 9-1 Optical Specifications

Ta=25°C, Signal timing=Typ.

Item		Symbol	Condition		Specifications			Unit	Remark	
					MIN.	TYP.	MAX.			Note
Visual Angle	Horizontal	$\theta_{L, R}$	$CR \geq 10$	$\theta_{U, D}=0^{\circ}$	85	—	—	deg		(1)(2)
	Vertical	$\theta_{U, D}$		$\theta_{L, R}=0^{\circ}$	85	—	—	deg		(3)(5)
	All Direction	θ			—	80	—	deg		(6)
Contrast Ratio		CR	$\theta_{L, R, U, D}=0^{\circ}$		400	700	—	—	White/Black	(1)(2) (3)(5)
Response Time(Rise+Fall) (B→W→B)		τ_{rise} + τ_{fall}	$\theta_{L, R, U, D}=0^{\circ}$	Ta=25℃	—	16	—	ms		(1)
				Ta=0℃	—	34	—	ms		(4) (5)
Response Time (Rise or Fall) (All gray scale)		τ_{avg}	$\theta_{L, R, U, D}=0^{\circ}$	Ta=25℃	—	10	—	ms	Average of Response Time, *2	
Brightness		I	$\theta_{L, R, U, D}=0^{\circ}$ $V_{CC}=5V$ $I_L=7mA$ $fL=50kHz$ R*,G*,B* Signal =All “H”		210	300	—	cd/m ²	White *1	(1)(5)
Brightness Uniformity		ΔI			70	—	—	%		(1)(5) (7)
Chromaticity	W	x			0.283	0.313	0.343	—		(1) (5)
		y			0.299	0.329	0.359	—		
	R G B	(x, y)	Red	(0.640 , 0.349) Typ.						
			Green	(0.283 , 0.598) Typ.						
Blue			(0.142 , 0.071) Typ.							
LCD Panel Type					TFT Color					
Display Mode					Normaly Black					
Wide Viewing Angle Technology					MVA					
Optimum Viewing Angle					— (symmentry)					(6)
Display Color					16,777,216 (8-bit color)					
Color of non-display area					Black					
Surface Treatment					Anti-glare(Haze value:(25%) , 2H)					

(*1) Value at 15~20 minutes after lighting on.

(*2) In case of applying FLCB-12, (First Response Time Driving Circuit)

(Note) •CS-1000 (MINOLTA Co., Ltd.) Field=1°, L=500mm

•Back-light current = 7mA, Dark room condition(1 lux or less)

Be carefull that the luminance meter, which you use, may not be able to get correct brightnenss if it's no set correctly.

DOCUMENT CONTROL SECTION

DATE


						TITLE LQ190E1LW01 (FLC48SXC8V-11AA)				
05	20040802				Revise of Response time.	DRAW. NO. LD17443 CUST.				
04	20040708				Revise of Response time.					
03	20040625				Addition of Response time.					
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION					
	DESIG.			CHECK						

SHARP CORPORATION


8 /

Note 1) Definition of Viewing Angle (1)

Based on Figure 9-1.

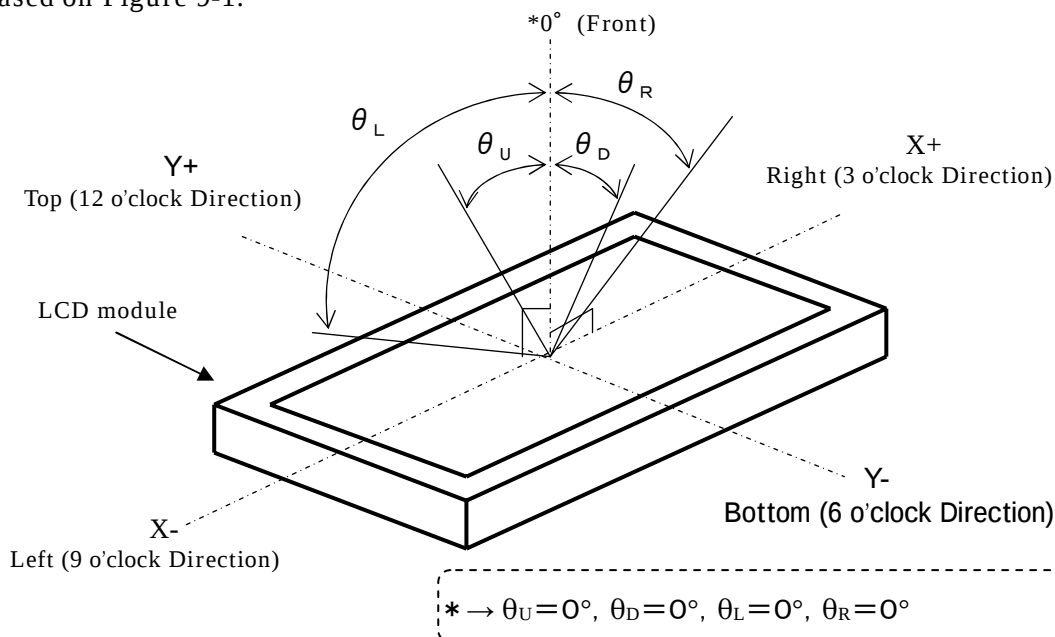
Figure 9-1 Definition of Viewing Angle (1)Note 2) Definition of Viewing Angle (2)

Based on Figure 9-2.

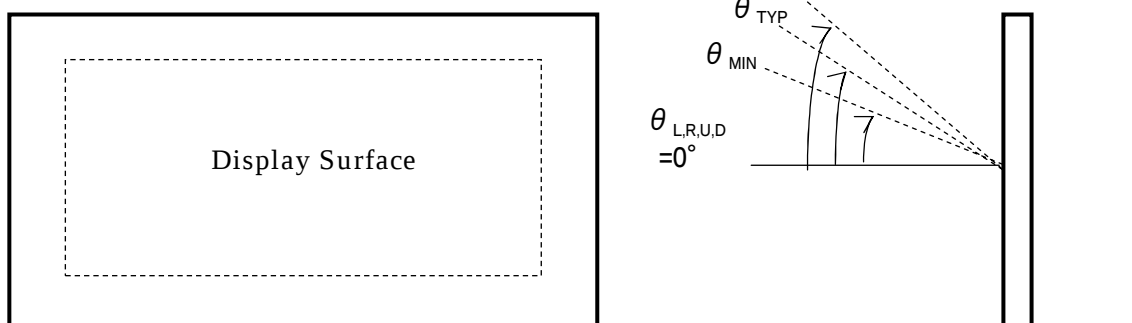Figure 9-2 Definition of Viewing Angle (2)Note 3) Definition of Contrast Ratio (CR)

Determined by Formula (1) based on Figure 9-3 Voltage-Brightness characteristics.

$$= \frac{L_W (\text{Brightness at white})}{L_B (\text{Brightness at black})} \dots\dots(1)$$

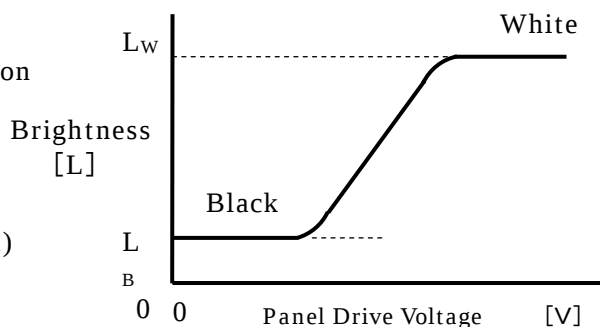Figure 9-3 Voltage-Brightness Characteristics

DOCUMENT CONTROL SECTION

DATE

EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION
DESIG.			CHECK		APPR.

TITLE	LQ190E1LW01 (FLC48SXC8V-11AA)
DRAW. NO.	LD17443
CUST.	
SHARP CORPORATION	9 /

Note 4) Definition of Response Time

Based on Figure 9-4.

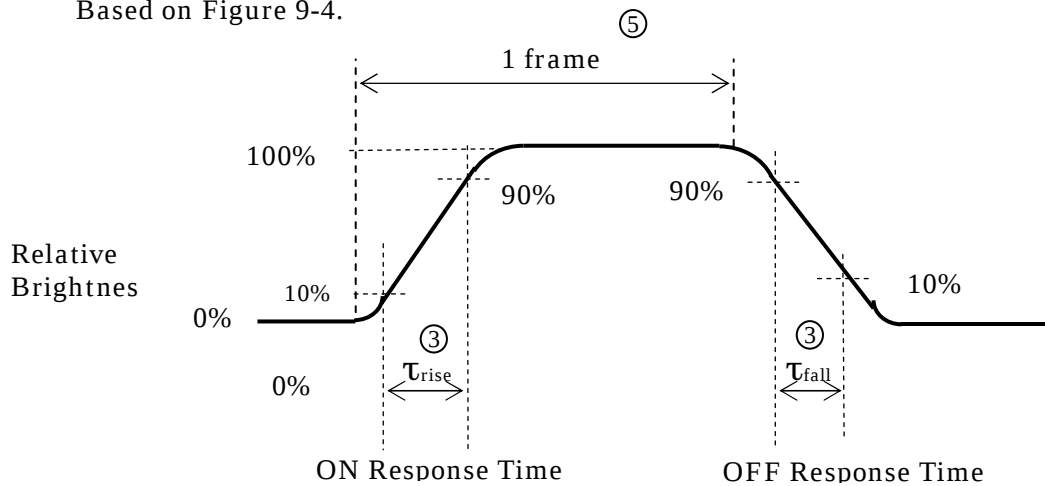


Figure 9-4 Definition of Response Time

Note 5) Contrast Ratio and Response Measurement System

Based on Figure 9-5.

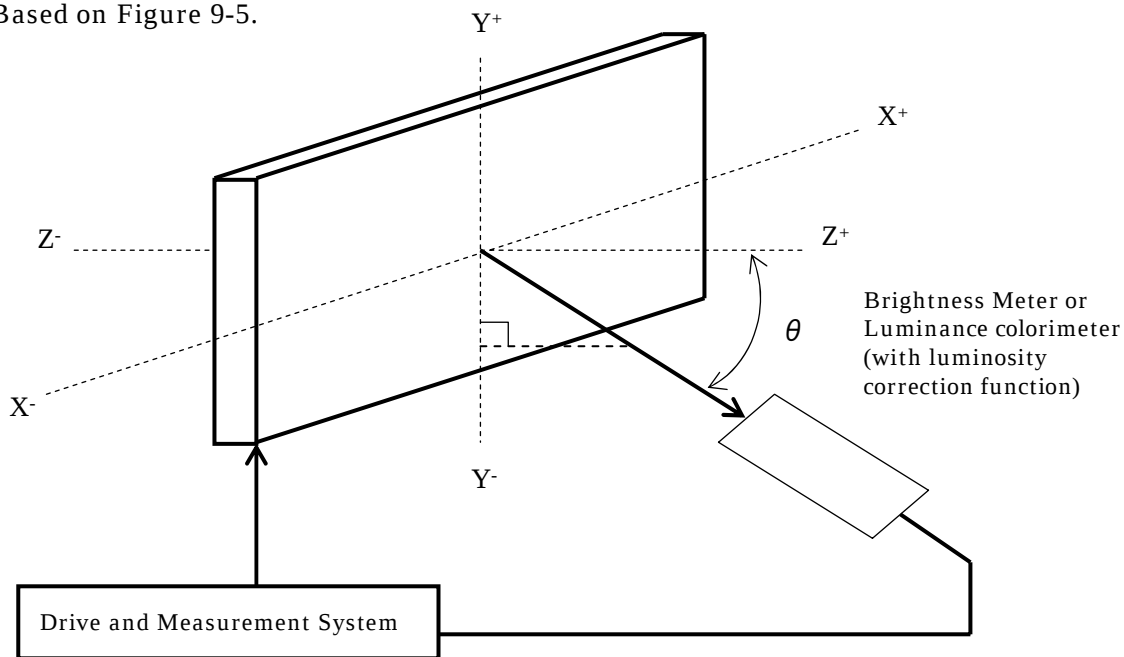


Figure 9-5 Contrast Ratio and Response Time Measurement System

DOCUMENT CONTROL SECTION

DATE

05	20040802				Addition of response time definition.
03	20040625				Change response time definition.
02	20040602				Change response time definition.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION
DESIG.			CHECK		APPR.

TITLE		LQ190E1LW01 (FLC48SXC8V-11AA)	
DRAW. NO.		LD17443	CUST.
SHARP CORPORATION		SEE	10/

A



C

C

D



E

F

1

10. INTERFACE SPECIFICATIONS

10-1 Signal descriptions

Table 10-1 shows the description and configuration of interface signals (CN1).

Table 10-1 Interface signals (CN1)

Pin No.	Symbol	I/O	Function
1	RxO0-	I	Negative differential input
2	RxO0+	I	Positive differential input
3	RxO1-	I	Negative differential input
4	RxO1+	I	Positive differential input
5	RxO2-	I	Negative differential input
6	RxO2+	I	Positive differential input
7	GND	—	Ground
8	RxOC-	I	Negative differential input
9	RxOC+	I	Positive differential input
10	RxO3-	I	Negative differential input
11	RxO3+	I	Positive differential input
12	RxE0-	I	Negative differential input
13	RxE0+	I	Positive differential input
14	GND	—	Ground
15	RxE1-	I	Negative differential input
16	RxE1+	I	Positive differential input
17	GND	—	Ground
18	RxE2-	I	Negative differential input
19	RxE2+	I	Positive differential input
20	RxEC-	I	Negative differential input
21	RxEC+	I	Positive differential input
22	RxE3-	I	Negative differential input
23	RxE3+	I	Positive differential input
24	GND	—	Ground
25	SEL LVDS	I	Select LVDS Mapping
26	PD	—	LVDS Core Power Down
27	TST	—	Test pin *1
28	Vcc	—	+5V power supply
29	Vcc	—	+5V power supply
30	Vcc	—	+5V power supply

Connector : FI-X30SSL-HF (Japan Aviation Electronics)

User's connector : FI-X30M (FPC type)

FI-X30H (Wire type) , FI-X30HL (Wire with lock)

FI-X30C (Coaxial cable type) , FI-X30C2L (Coaxial cable with lock)

*1: Keep open. (Internal test use only.)

*2: When using a connector other than the recommended one , a defect in the initial stage or a problem concerning long term reliability may occur.

DOCUMENT CONTROL SECTION

DATE

						TITLE					LQ190E1LW01		
											(FLC48SXC8V-11AA)		
						DRAW. NO.					LD17443		CUST.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION					SHARP CORPORATION		Sheet	12 /
	DESIG.			CHECK			APPR.						

SHARP CORPORATION

Sheet

12 /

Table 10-2A LVDS Data Assignment(**SEL LVDS=L**)

DOCUMENT CONTROL SECTION

- Input odd or even data depending on the display position of the LCD module.

						TITLE					LQ190E1LW01 (FLC48SXC8V-11AA)		
						DRAW. NO.					LD17443		CUST.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION					SHARP CORPORATION		Sheet	13/
	DESIG.			CHECK			APPR.						

Table 10-2B LVDS Data Assignment(SEL LVDS=H)

Input signal *1		Transmitter DS90CF383,C385		Interface connector			Receiver DS90CF386 THC63LVDF84		LCD Control input	
		pin	INPUT	System side	LCD module		pin	OUTPUT		
					pin					
LVDS Odd	RO0	51	TxIN0	Tx OUT0+	2	RxO0+	27	RxOUT0	RO0	
	RO1	52	TxIN1				29	RxOUT1	RO1	
	RO2	54	TxIN2				30	RxOUT2	RO2	
	RO3	55	TxIN3				32	RxOUT3	RO3	
	RO4	56	TxIN4	Tx OUT0-	1	RxO0-	33	RxOUT4	RO4	
	RO5	3	TxIN6				35	RxOUT6	RO5	
	GO0	4	TxIN7				37	RxOUT7	GO0	
	GO1	6	TxIN8				38	RxOUT8	GO1	
	GO2	7	TxIN9	Tx OUT1+	4	RxO1+	39	RxOUT9	GO2	
	GO3	11	TxIN12				43	RxOUT12	GO3	
	GO4	12	TxIN13				45	RxOUT13	GO4	
	GO5	14	TxIN14				46	RxOUT14	GO5	
	BO0	15	TxIN15	Tx OUT1-	3	RxO1-	47	RxOUT15	BO0	
	BO1	19	TxIN18				51	RxOUT18	BO1	
	BO2	20	TxIN19				53	RxOUT19	BO2	
	BO3	22	TxIN20				54	RxOUT20	BO3	
	BO4	23	TxIN21	Tx OUT2+	6	RxO2+	55	RxOUT21	BO4	
	BO5	24	TxIN22				1	RxOUT22	BO5	
	RSVD	27	TxIN24				3	RxOUT24	Not use	
	RSVD	28	TxIN25				5	RxOUT25	Not use	
	ENAB	30	TxIN26	Tx OUT2-	5	RxO2-	6	RxOUT26	ENAB	
	RO6	50	TxIN27				7	RxOUT27	RO6	
	RO7	2	TxIN5				34	RxOUT5	RO7	
	GO6	8	TxIN10				41	RxOUT10	GO6	
	GO7	10	TxIN11	Tx OUT3+	11	RxO3+	42	RxOUT11	GO7	
	BO6	16	TxIN16				49	RxOUT16	BO6	
	BO7	18	TxIN17				50	RxOUT17	BO7	
	RSVD	25	TxIN23				2	RxOUT23	Not use	
		DCLK	31	TxCLK IN	TxCLK OUT+ TxCLK OUT-	9 8	RxCLK IN+ RxCLK IN-	26	RxCLK OUT	DCLK
	LVDS Even	RE0	51	TxIN0	Tx OUT0+	13	RxEO+	27	RxOUT0	RE0
RE1		52	TxIN1	29				RxOUT1	RE1	
RE2		54	TxIN2	30				RxOUT2	RE2	
RE3		55	TxIN3	32				RxOUT3	RE3	
RE4		56	TxIN4	Tx OUT0-	12	RxEO-	33	RxOUT4	RE4	
RE5		3	TxIN6				35	RxOUT6	RE5	
GE0		4	TxIN7				37	RxOUT7	GE0	
GE1		6	TxIN8				38	RxOUT8	GE1	
GE2		7	TxIN9	Tx OUT1+	16	RxE1+	39	RxOUT9	GE2	
GE3		11	TxIN12				43	RxOUT12	GE3	
GE4		12	TxIN13				45	RxOUT13	GE4	
GE5		14	TxIN14				46	RxOUT14	GE5	
BE0		15	TxIN15	Tx OUT1-	15	RxE1-	47	RxOUT15	BE0	
BE1		19	TxIN18				51	RxOUT18	BE1	
BE2		20	TxIN19				53	RxOUT19	BE2	
BE3		22	TxIN20				54	RxOUT20	BE3	
BE4		23	TxIN21	Tx OUT2+	19	RxE2+	55	RxOUT21	BE4	
BE5		24	TxIN22				1	RxOUT22	BE5	
RSVD		27	TxIN24				3	RxOUT24	Not use	
RSVD		28	TxIN25				5	RxOUT25	Not use	
RSVD		30	TxIN26	Tx OUT2-	18	RxE2-	6	RxOUT26	Not use	
RE6		50	TxIN27				7	RxOUT27	RE6	
RE7		2	TxIN5				34	RxOUT5	RE7	
GE6		8	TxIN10				41	RxOUT10	GE6	
GE7		10	TxIN11	Tx OUT3+	23	RxE3+	42	RxOUT11	GE7	
BE6		16	TxIN16				49	RxOUT16	BE6	
BE7		18	TxIN17				50	RxOUT17	BE7	
RSVD		25	TxIN23				2	RxOUT23	Not use	
		DCLK	31	TxCLK IN	TxCLK OUT+ TxCLK OUT-	21 20	RxCLK IN+ RxCLK IN-	26	RxCLK OUT	Not use

*1 •RSVD (reserved) pin on a transmitter should be connected with Ground.

•Input odd or even data depending on the display position of the LCD module.

DOCUMENT CONTROL SECTION

DATE

TITLE		LQ190E1LW01	
		(FLC48SXC8V-11AA)	
DRAW. NO.		CUST.	
LD17443			

EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION
DESIG.			CHECK		APPR.

SHARP CORPORATION

14/

10-3 Color Data Assignment

Table 10-3 shows the Color Data Assignment.

Table 10-3 Color Data Assignment

Color		R Input data								G Input data								B Input data							
	Odd Even	R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Brighter	253	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↓	254	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	255	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	↑	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Brighter	253	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	↓	254	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green	255	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1
	↑	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Brighter	253	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	↓	254	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue	255	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Note.1) Definition of gray scale:Color (n)...”n” indicates gray scale level.

Larger number means brighter level.

Note.2) Data; 1:High, 0:Low

Note 3) Color data consist of 8 bit red, green and blue data of odd and even number pixel data.
Total data number is 48 signals. This module is able to display 16,777,216 colors because each red, green and blue data is controlled independently.

DOCUMENT CONTROL SECTION

DATE

TITLE	LQ190E1LW01 (FLC48SXC8V-11AA)
DRAW. NO.	LD17443
CUST.	

EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION
DESIG.			CHECK		APPR.

SHARP CORPORATION

15/

10-4 Input Signal Timing

Table 10-4 and Figure 10-1 shows the Input Signal Timing at LVDS transmitter.

Table 10-4 Timing Characteristics

(Ta=0~50°C, Vcc=5±0.25V)

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK signal (Clock)	Period	Tc	14.3	18.5	25.0	ns	
	Frequency	1/Tc	40	54	70	MHz	
	Duty	Tch/Tc	45	50	55	%	
	High time	TclhH	5.0	—	—	ns	
	Low time	TclhL	5.0	—	—	ns	
DCLK-Data Timing	Setup time	Tset	3	—	—	ns	LVDS Tr spec.
	Hold time	Thold	5	—	—	ns	
ENAB signal	Hor. Period (1)	Th	5350/Tc+435	844	887 *1	DCLK	Tc=ns
	Hor. Period (2)	Th	648	—	1023	DCLK	*4
	Hor. Display period	Thd	640	640	640	DCLK	*2
	Vertical Period	Tv	1028 *1	1066	1088 *1	Th	16.67ms
	Ver. Frequency	1/Tv	50	60	76.2	Hz	
	Ver. Display period	Tvd	1024	1024	1024	Th	*2
	Data-ENAB timing	Tdn	—	0	—	DCLK	*3

*1)•horizontal display position is specified by the rise of ENAB.

The data latched at falling edge of DCLK after rise of ENAB is displayed at the left edge of the display area.

•Vertical display position is specified by the rise of ENAB after low level continuation over 2048 DCLK.

The data latched at the rise of ENAB is displayed at the top line of the display area.

*2)•If the “High” level period of ENAB is less than 640 DCLK or the number of ENAB in a frame period (Tv) is less than 1024, black color is displayed at the rest of the display area.

*3)•If ENAB does not synchronize with the effective display data, the display position does not fit to the display area.

*4)•Hor. Period (2) shows the operating range where internal circuit can work correctly.

•When ENAB signal is out of Hor. Period (1), the display quality may deteriorate.

						TITLE		LQ190E1LW01	
								(FLC48SXC8V-11AA)	
						DRAW. NO.		LD17443	
								CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		SHARP CORPORATION		16/
DESIG.			CHECK			APPR.			

A

The diagram illustrates the timing parameters for the 1-wire protocol. The voltage levels are 0.9V (idle), 2.3V (data high), and 1.65V (data low). The timing parameters are defined as follows:

- T_c : Total cycle time.
- T_{clkL} : Low pulse width of the clock.
- T_{clk} : Clock period.
- T_{ch} : High pulse width of the data signal.
- T_{set} : Setup time before data sampling.
- T_{thold} : Hold time after data sampling.
- T_{c1} : Time from the start of the clock pulse to the start of the data signal.

ENAB
RO7-0, RE7-0
GO7-0, GE7-0
BO7-0, BE7-0

$$\frac{-2.3V}{0.9V}$$

B

RO7-0, RE7-0
GO7-0, GE7-0
BO7-0, BE7-0

ENAB

Th

Thd

RO7-0, RE7-0
GO7-0, GE7-0
BO7-0, BE7-0

C001

C1024

C

ENAB

Tvd

Tv

D

DCLK

 T_c

RO7-0, RE7-0
GO7-0, GE7-0
BO7-0, BE7-0

Diagram illustrating a 16-bit bus structure. The bus is divided into two 8-bit segments by a dashed line. The top segment contains bits 0001, 0003, 0005, 0007, 0009, 0011, 1267, 1269, 1271, 1273, 1275, 1277, and 1279. The bottom segment contains bits 0002, 0004, 0006, 0008, 0010, 0012, 1268, 1270, 1272, 1274, 1276, 1278, and 1280.

ENAB

A horizontal line with a vertical dashed line intersecting it. A double-headed arrow is positioned below the line, spanning from the vertical dashed line to the right edge of the diagram. The label T_{dn} is placed above the right half of the arrow.

Figure 10-1 Input Signal Timing Chart

DOCUMENT CONTROL SECTION

DATE _____

TITLE	LQ190E1LW01 (FLC48SXC8V-11AA)
-------	----------------------------------

DRAW. NO.	LD17443
-----------	---------

CUST.

EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		
	DESIG.			CHECK			APPR

SHARP CORPORATION

STEF

17/

1

11. BACK-LIGHT SPECIFICATIONS

11-1 Pin configuration for Back-light

Table 11-1 shows the description and Pin assignment of the connectors (CN-A to D) for the Back-light of this LCD module.

Table 11-1 Pin Assignment of CN-A to CN-D

Pin No.	Signal				Function	Cable color
	CN-A	CN-B	CN-C	CN-D		
1	V _{L1}	V _{L2}	V _{L3}	V _{L4}	Power supply	Pink ,Orange
2	—	—	—	—	—	—
3	GND	GND	GND	GND	Ground	Blue, Gray

Connector : Housing : BHR-03VS-1
Contact : SBH-001T-P0.5
User's Connector : Post with base: SM02(8.0)B-BHS-1-TB
Supplier : Japan Solderless Terminal Trading Company LTD. (J.S.T.)

11-2 Life

The life of the back-light is a minimum of 50,000 hours at the following conditions.

(1) Working conditions

- ①Ambient temperature: $25 \pm 5^{\circ}\text{C}$
②Tube current (I_L) : 7mA or less

(2) Definition of life

- ①Brightness becomes 50% or less than the minimum brightness value shown in Table 9-1.
②The lamp cannot be lit by the minimum value of the breakdown voltage(1760Vrms) shown in Table 8-1.
③Flashing.

11-4 Lamp assembly set (for replacement)

Lamp assembly set(with charge)is prepared for replacing old lamp to new one.
This set consists of a upper lamp assembly and a lower lamp assembly.

Type number : LQ0DDB5467(FLCL-33)

Minimum order qty. unit : 20 pcs.

DOCUMENT CONTROL SECTION

DATE

						TITLE LQ190E1LW01	
						(FLC48SXC8V-11AA)	
						DRAW. NO.	CUST.
						LD17443	
07	20050420				Lamp Assy No. was changed.		
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		
	DESIG.			CHECK		APPR.	

12-1 Appearance

D:Average diameter [mm], W:Width [mm], L:Length [mm], S=(bright spot size)/(dot size)

						TITLE													
						LQ190E1LW01													
						(FLC48SXC8V-11AA)													
						DRAW. NO.													
						LD17443													
						CUST.													
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION														
	DESIG.			CHECK			APPR.		SHARP CORPORATION										
									STRUCTURE	20/									

12-2 Dot defects (Bright spots, Dark spots)

A

A

12-2-1 Zone

- Inside display dot area (376.32×301.056mm)
- Display dot area means active area.
- One pixel consists of 3 dots (red, green and blue).
- Foreign particle and scratch unharful to display image, such as the foreign particle under polarizer film but outside of the display area and scratch on metal bezel, backlight module or polarizer film out of the display area, etc., are not counted.

B

B

12-2-2 Bright spots

(1) Bright spots by the defect of TFT.

- Visible under bias of 2% ND filter High bright spot R•G
- Visible under 5% but invisible under 2% ND filter Low bright spot R•G•B
- Invisible under bias of 5% ND filter Not counted

(2) Bright spots by the light passing through tears, breaks, etc in color filter.

- Exceed size of a half dot High bright spot
- A half dot or less Not counted

(3) Bright spots by the light passing through tears, breaks, etc in chromium mask.

- Exceed 50μm..... High bright spot
- 50μm or less Not counted

C

C

12-2-3 Test condition

- Inspector must observe the LCD screen from the normal direction under the illumination by a single 20W fluorescent lamp. The distance between the LCD screen and the inspector should be a height of 50cm above the worktable.
The vertical illuminance is 300 to 600lux (reference value).
- Bright spot should be counted under entire black screen.
- Dark spot should be counted under entire white screen.
- Input signal timing should be typical value.

D

D

(Note1) Please do not mistake a single bright spot for a bright spot connection due to Cs(supplemental capacitance) line at the center of each dot.

(Note2) If a pixel is dark partially, it connects into the number of dark spots in accordance with following rule.

- (a) $A < 1/3$: Not count. Only one of 4 dark connection is allowed.
 (b) $1/3 \leq A < 2/3$: Considered as 0.5 dot.
 (c) $2/3 \leq A$: Considered as 1 dot.
 (A=Dark spot size/dot size)

E

DOCUMENT CONTROL SECTION

DATE

						TITLE		LQ190E1LW01	
								(FLC48SXC8V-11AA)	
						DRAW. NO.		LD17443	
								CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION				
DESIG.				CHECK			APPR.		
1									

F

SHARP CORPORATION

21 /

Table 13-1 Environmental specifications

NOTE: Table 13-2 and Figure 13-1 show the shock resistance standard when module is packaged.

A 3D diagram of a rectangular prism. The faces are labeled: G (Top face), J (Rear face), F (Side face), E (Side face), I (Front face), and H (Bottom face). The edges are labeled: C (Edge), B (Edge), and D (Edge). A corner is labeled: A (Corner). Dashed lines represent hidden edges.

1

14. INDICATIONS

This module has the following indications.

- (1) Product name : **LCD unit**
- (2) SHARP Model Number : LQ190E1LW01
- (3) Model Number : FLC48SXC8V-11AA
- (4) Manufacturing Number : **5 6 0 0 0 0 1**

Serial number
(To be reset every month on 1st.)

Manufacturing month
(Oct. = X, Nov. =Y, Dec. =Z)

Last digit of manufacturing year.

- (5) Version number : **01A** (Example)
-1st 2 digits "01" means operational version.
-3rd alphabet means functional version.

- (6) Manufacturer Country Name :

- (7) Company Name : SHARP CORPPRATION

- (8) Disposal method of cold-cathode tubes.

- (9) Caution when changing cold-cathode tubes.

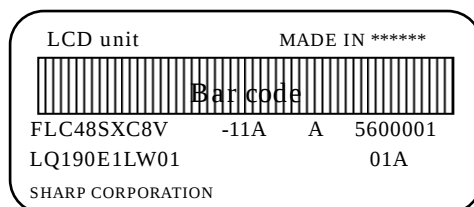


Figure 14-1 Product Label (Example)

15. PACKAGING

15-1 Packing specifications

- (1) 5 LCD modules/1package.
- (2) Weight : approximately 14kg /1package.
- ②(3) Outline dimensions: 499mm (W)x 250mm (D)x 464mm (H)

15-2 Packing method

Figure 15-2 show the packing method.

DOCUMENT CONTROL SECTION

DATE

						TITLE					LQ190E1LW01 (FLC48SXC8V-11AA)			
07	20050420					Model name and Company Name was changed					DRAW. NO.		CUST.	
02	20040602					Correction of packing box size.					LD17443			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION					SHARP CORPORATION			Sheet 1 of 1	23 /
	DESIG.			CHECK				APPR.						

A

Protective sheet

Front side

B



Put the cable in slot

Rear side

C



D

Anti-Electric Bag

Front side

A

B

C

D

E

Fig.15-2 (a) Packaging Method

DOCUMENT CONTROL SECTION


DATE

EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION
DESIG.			CHECK		APPR.

TITLE	LQ190E1LW01 (FLC48SXC8V-11AA)	
DRAW. NO.	L D 17 4 4 3	CUST.
SHARP CORPORATION		24 /

F

E



1

A

B

C

D

A

B


C

D


E

F

⑤

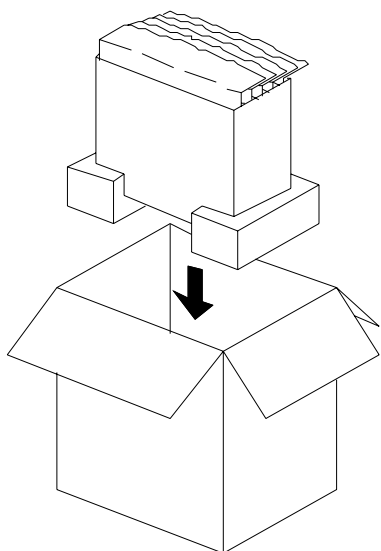


⑥

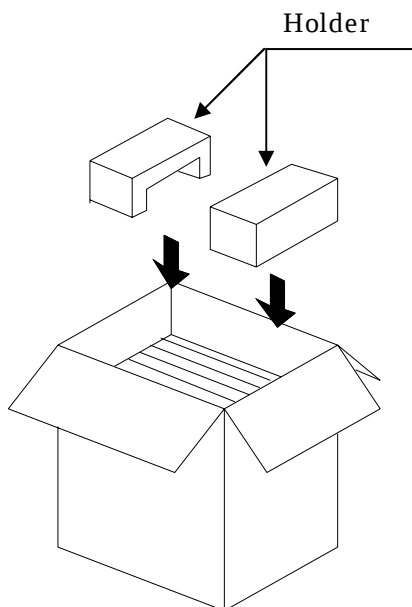


The Front side of LCD units
should be faced to the direction of
the making on carton box.

⑦

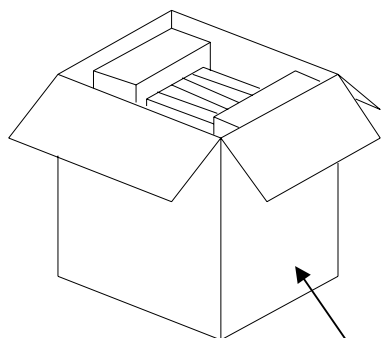

⑧

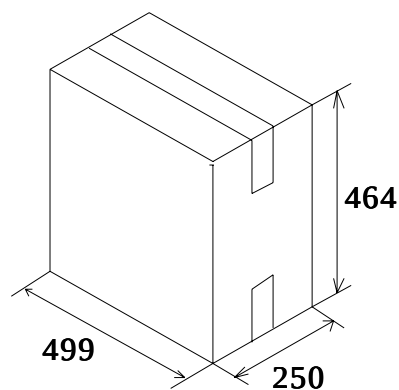

Sample of carton label

型 格 (TYPE) FLC48SXC8V -11A A 数 量 (QTY.) 5
図 番(DRG. No.) LQ190E1LW01 ** 版 数(Rev. No.) 01A

5600001
5600002
5600003
5600004
5600005

Bar code

Fig.15-2 (b) Packaging Method


DOCUMENT CONTROL SECTION

DATE

07	20050420				Model name was changed.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION
	DESIG.			CHECK	

TITLE	LQ190E1LW01 (FLC48SXC8V-11AA)
DRAW. NO.	LD 17443
CUST.	
SHARP CORPORATION	26 /

E



TITLE		LQ190E1LW01 (FLC48SXC8V-11AA)	
DRAW. NO.		CUST.	
LD17443			
SHARP CORPORATION		Sheet	27 /

A

A

Cushioning material

Corrugated carton (A)
with LCD modules

B

B

602
(580)

Corrugated fiberboard shipping container (B)

446
(430)

646
(630)

C

C

Note 1) The carton (A) should be placed in the middle of the container (B) with enough cushioning materials.

Note2) The figures in () show inside measurements of the container (B).

Figure.15-2 (d) Packing method

D

D

DOCUMENT CONTROL SECTION

DATE

E

F

						TITLE LQ190E1LW01	
						(FLC48SXC8V-11AA)	
						DRAW. NO. LD 17 443	CUST.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	SHARP CORPORATION	
DESIG.			CHECK		APPR.		

28 /

16.WARRANTY

The warranty period is one year after shipping. Products which fail during this period are repaired or replaced without charge, unless the failure is caused by user.

17.PRECAUTIONS

Adhere to the following precautions to use this LCD module properly.

(1) Fail safe design

LCD module has an inherent chance of failure. Customers must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

(2) Handling of LCD panel**① Do not apply any strong mechanical shock to the LCD panel.**

Since the LCD panel is made of glass, excessive shock may damage the panel or cause a malfunction.

② Do not press hard on the LCD panel surface.

In the LCD panel, the gap between two glass plates is kept perfectly even to maintain display properties and reliability. The hard pressure on the LCD panel may cause the following problems. If the pressure is over 2kg/cm², the problem don't return to normal condition.

① Ununiformity of color

② Disorder of orientation of liquid crystal

Problem ① returns to normal condition after a while. Problem ② returns to normal condition by turning the power off and turning on again.

However these operations should be avoided to insure reliability.

③ Do not scratch the polarizer film on the LCD panel surface.

- Do not press or rub the display surface with a hard tool, tweezers, etc.
- For handling, use cotton or conductive gloves so that the display surface is not soiled.
- If dust or dirt soils the display surface, clean it as follows with a soft cloth (deerskin, etc.)

[Dust] Wipe off with a soft cloth. (do not rub.)

[Dirt] Apply clear water to a soft cloth and squeeze hard out of water drops, then lightly wipe off the specified parts. Only if the dirt is hardly wiped off, use isopropyl alcohol or ethanol.

Be careful not to splash the water or the solvents on the edge of polarizer and in the LCD unit.

The polarizer possibly exfoliates due to the solvent and water penetrated between the polarizer and the LCD panel.

Do not use unspecified solvent such as ketone (acetone, etc.) and aromatics (xylene, toluene, etc.)

DOCUMENT CONTROL SECTION

DATE

						TITLE	LQ190E1LW01 (FLC48SXC8V-11AA)	
						DRAW. NO.	LD17443	CUST.
EDIT	DATE	DESIG.	CHECK	APPR.		DESCRIPTION		
	DESIG.			CHECK			APPR.	
SHARP CORPORATION							Sheet	29 /

(Caution) Be careful not to allow the water or solvent to enter the module.

• If saliva or water drops are left for a long period of time, the part may become deformed or discolored.

Wipe off immediately in the same way as for dirt.

• Do not allow oil to adhere to the module since excessive oil is hard to clean.

④ Do not place or contact objects on the display surface for a long period of time.

This may make some parts of the LCD module distorted and the quality of display may deteriorate.

(3) Handling of LCD module

① Do not pull the cold-cathode tube cable strongly.

If the cable is pulled with the strength of 2kg or more, the cable may be damaged or may lose reliability.

② Assemble the module into user's system in a dust free environment.

Conductive foreign matter adheres to the module may cause failures.

③ Take anti-electrostatic measures for assembling the module.

Since the LCD module contains CMOS-ICs, the following points should be observed.

• For assembling the module, operator should be grounded and wear cotton or conductive gloves.

• Floor of work area and work table to assemble the LCD module should be covered with electrostatic shielding in order to discharge static electricity via an earth wire.

• If necessary, ground operation tools (soldering iron, radio pliers, tweezers, etc.).

• Do not take the module out of the conductive bag until the module is assembled.

• Do not assemble the module under low humidity (50%RH or less).

④ Do not pull the connecting cable on the rear face of the LCD module strongly.

⑤ Do not disassemble or remodel the LCD module.

Disassembly or remodeling of the LCD module may result in malfunctions or deterioration of the display quality and reliability.

(4) Precautions in regards of operating the LCD module

① Adhere to the specified power supply sequence.

If not followed, the CMOS-IC may cause a latch-up, or DC voltage may be applied to the liquid crystal, which cause a failure or serious deterioration in display quality.

② Do not operate the LCD module when condensation occurs.

If the LCD module is operated when condensation is on the terminals of the LCD panel, the terminals cause electrochemical reaction, and may reach disconnection. Condensation easily occurs especially when the module is moved from cold environment to warm environment.

DOCUMENT CONTROL SECTION

DATE

						TITLE	LQ190E1LW01	
							(FLC48SXC8V-11AA)	
						DRAW. NO.	LD17443	CUST.
EDIT	DATE	DESIG.	CHECK	APPR.		DESCRIPTION	SHARP CORPORATION	30 /
	DESIG.			CHECK		APPR.		

A

③ The following troubles occur when the LCD module is not used under recommended temperature.

- Operation under high temperature(>50℃): Display colors shift to blue.
- Storage under high temperature(>60℃): The polarizer film deteriorates and contrast decreases.
- Operation under low temperature(< 0℃): The response speed decreases considerably.
- Storage under low temperature(<-20℃): The liquid crystal may solidify and become damaged.

B

④ Be sure to input the control signals at the correct timing.

If control signals (DCLK, ENAB) are not input, or if the timing is out of the specified timing, DC voltage may be applied to the liquid crystal and, as a result, cause image sticking or deterioration of contrast.

(5) Precautions in regards of designing module mounting

① Excessive force should not be applied to the screen or the rear side of the LCD module.

Excessive pressure on the screen caused by the installation of the LCD module may deteriorate display quality and reliability.
Brightness uniformity and the reliability of CCFL may decrease if the pressure is applied to the backlight module.

② Avoid twisting and bending the LCD module.

Excessive twist and bend may damage display quality and reliability.

③ Avoid extending the power cable between the LCD module and inverter.

This may cause the backlight to flicker or not to light.

④ Keep the backlight cable apart from the metal enclosure of the LCD module.

When frequency current for backlight driving leak to the metal enclosure, the desired brightness may not be assured.

⑤ When mounting LCD module with M3 screws (x4), tighten the screws with torque 3.5kgf.

(6) Storage method

① Do not store the LCD module in an atmosphere of organic solvent or corrosive gas.

In an organic solvent atmosphere, the polarizer film discolors and display quality deteriorates.
In a corrosive gas environment, various parts of the module may corrode or deteriorate.

② Store the LCD module in a SHARP package.

At storing, SHARP packages can be stacked up to 3 boxes.
The LCD module is in an anti-static bag. Keep the module in that status.

DOCUMENT CONTROL SECTION

DATE

						TITLE		LQ190E1LW01	
								(FLC48SXC8V-11AA)	
						DRAW. NO.		LD17443	
								CUST.	
07	20050420				Company Name was changed				
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION				
DESIG.				CHECK				SHARP CORPORATION	
								31 /	

- ③ The LCD module is recommended to be stored in humidity controlled, cool and dark locations.

Recommended storage environment

- Place : Dark (avoid direct sunlight)
- Temperature : 10~35°C
- Humidity : 50~60%RH

Note) If the module is left in an environment of 60°C and above for a long period of time, optical characteristics may deteriorate.

(7) Disposal Method

① LCD module

The components of this LCD module can be grouped into metal, resin, glass and so on. As the backlight contains CCFL which includes mercury, it must be disposed according to the local ordinance or regulations.

② Package

All the packages are made of recyclable papers except the anti-ESD bag.

(8) CAUTION IN DESIGNING INVERTER

Fluorescent lamps driven by high voltage are included in this LCD module. Please stand to the instructions below when designing inverter that lights the fluorescent lamps. Otherwise it may lead to FATAL FAILURE, such as SMOKING or FIRING.

- ① **APPLY PROTECTIVE CIRCUIT** in preparation for lamp breaking, wire breaking and short circuit. The protective circuit should also detect half open circuit and wire breaking in narrow gap etc.. Otherwise it may lead to fatal failure.

- ② **KEEP ENOUGH CURRENT CAPACITY** of inverter output for leakage current, which leaks from lamps and wire to surrounding metal material. Usually output current of about 1.5 times as same as the lamp current is necessary. But it sometimes varies due to characteristics of the inverter itself. So before determining design, please check characteristics of the inverter by connecting it to the LCD module.

- ③ **KEEP ENOUGH TEMPERATURE MARGIN** for each parts mounted on inverter. Temperature of the parts becomes higher when they are mounted in the final products due to heating inside. The temperature of each parts MUST NOT increase over the guaranteed temperature.

DOCUMENT CONTROL SECTION

DATE

						TITLE	LQ190E1LW01	
							(FLC48SXC8V-11AA)	
						DRAW. NO.	LD17443	
							CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.		DESCRIPTION		
	DESIG.			CHECK			APPR.	
SHARP CORPORATION							32 /	

A


- When the LCD module is returned without following the specified packaging procedures, SHARP will not take responsibility for the damages caused by the failure of the packaging method.

- B

B



D

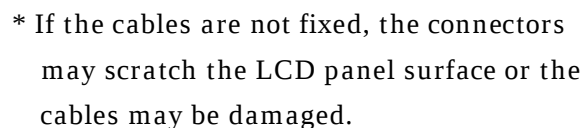


D

E

(4) Storage into the carton box

• When using the carton box manufactured by SHARP

(Please use carton boxes and arrowheads that are not collapsed)

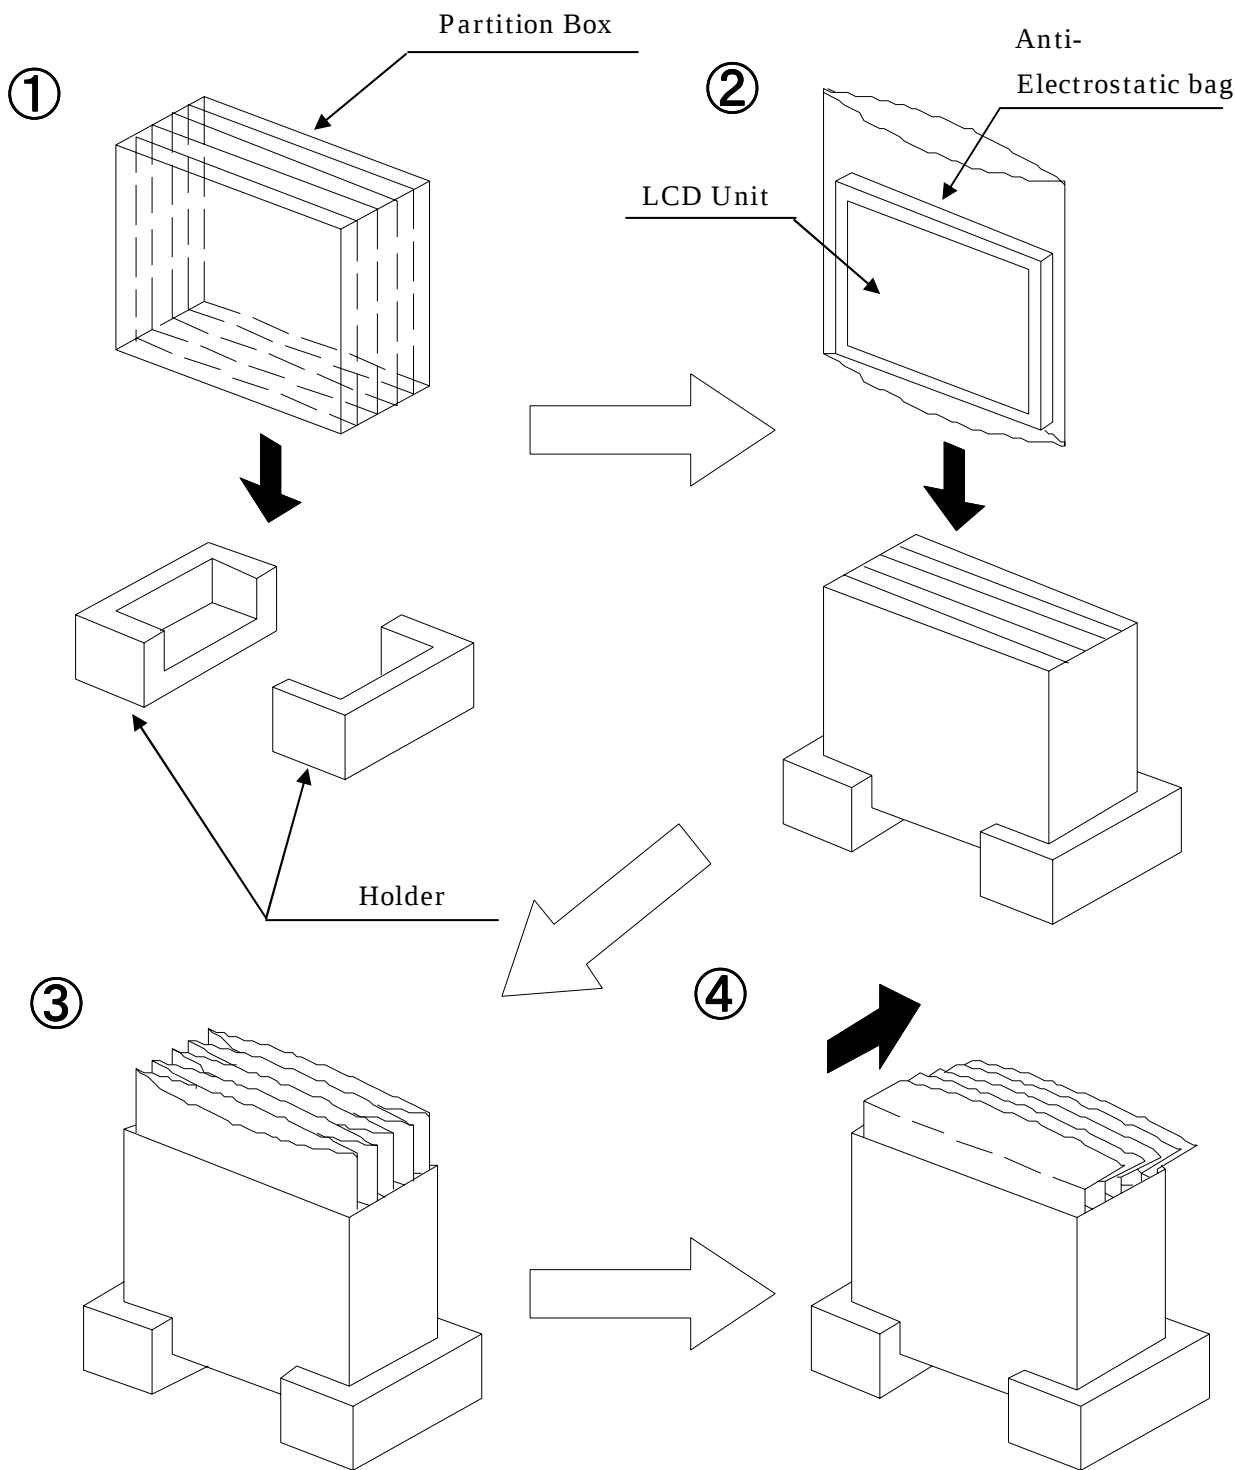

●Cautious●

Do not to put Anti-electrostatic bag
in the partition box.

The bending direction should
be arranged.

DOCUMENT CONTROL SECTION

DATE

07	20050420				Company Name was changed
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION
	DESIG.			CHECK	

TITLE	LQ190E1LW01 (FLC48SXC8V-11AA)
DRAW. NO.	LD17443
CUST.	
SHARP CORPORATION	34 /

⑧

Carton Box

464

499

250

1

(9) Others

① If the LCD panel is damaged, do not inhale and do not swallow the liquid crystal.
If the liquid crystal adhere to the body or cloths, wash it off with soap immediately.
Follow regular precautions for electronic components.

② Flux residue on the printed circuit board is harmless to the quality and reliability of LCD module.
SHARP has adopted non-wash technology on module assembly process.

18. PRECAUTIONS FOR USE

This Product is designed, developed and manufactured as contemplated for general use, including without limitation, general office use, personal use, household use, and ordinary industrial use, but is not designed, developed and manufactured as contemplated for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could lead directly to death, personal injury, severe physical damage or other loss (hereinafter “High Safety Required Use”), including without limitation, nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system. If customer’s product possibly falls under the category of High Safety Required Use, please consult with our sales representatives in charge before such use. In addition, SHARP shall not be liable against the Customer and/or any third party for any claims or damages arising in connection with the High Safety Required Use of the Product without permission.

19. MISCELLANEOUS

Specifications of the TFT-LCD panel and other components used in the LCD module are subject to change. Both parties shall discuss together before change.
If any doubt is raised in the content of the specifications, both parties shall discuss and make best effort for the agreement.

DOCUMENT CONTROL SECTION

DATE

						TITLE LQ190E1LW01	
						(FLC48SXC8V-11AA)	
						DRAW. NO.	CUST.
07	20050420				Company Name was changed	LD17443	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	SHARP CORPORATION	
	DESIG.		CHECK		APPR.		36 /

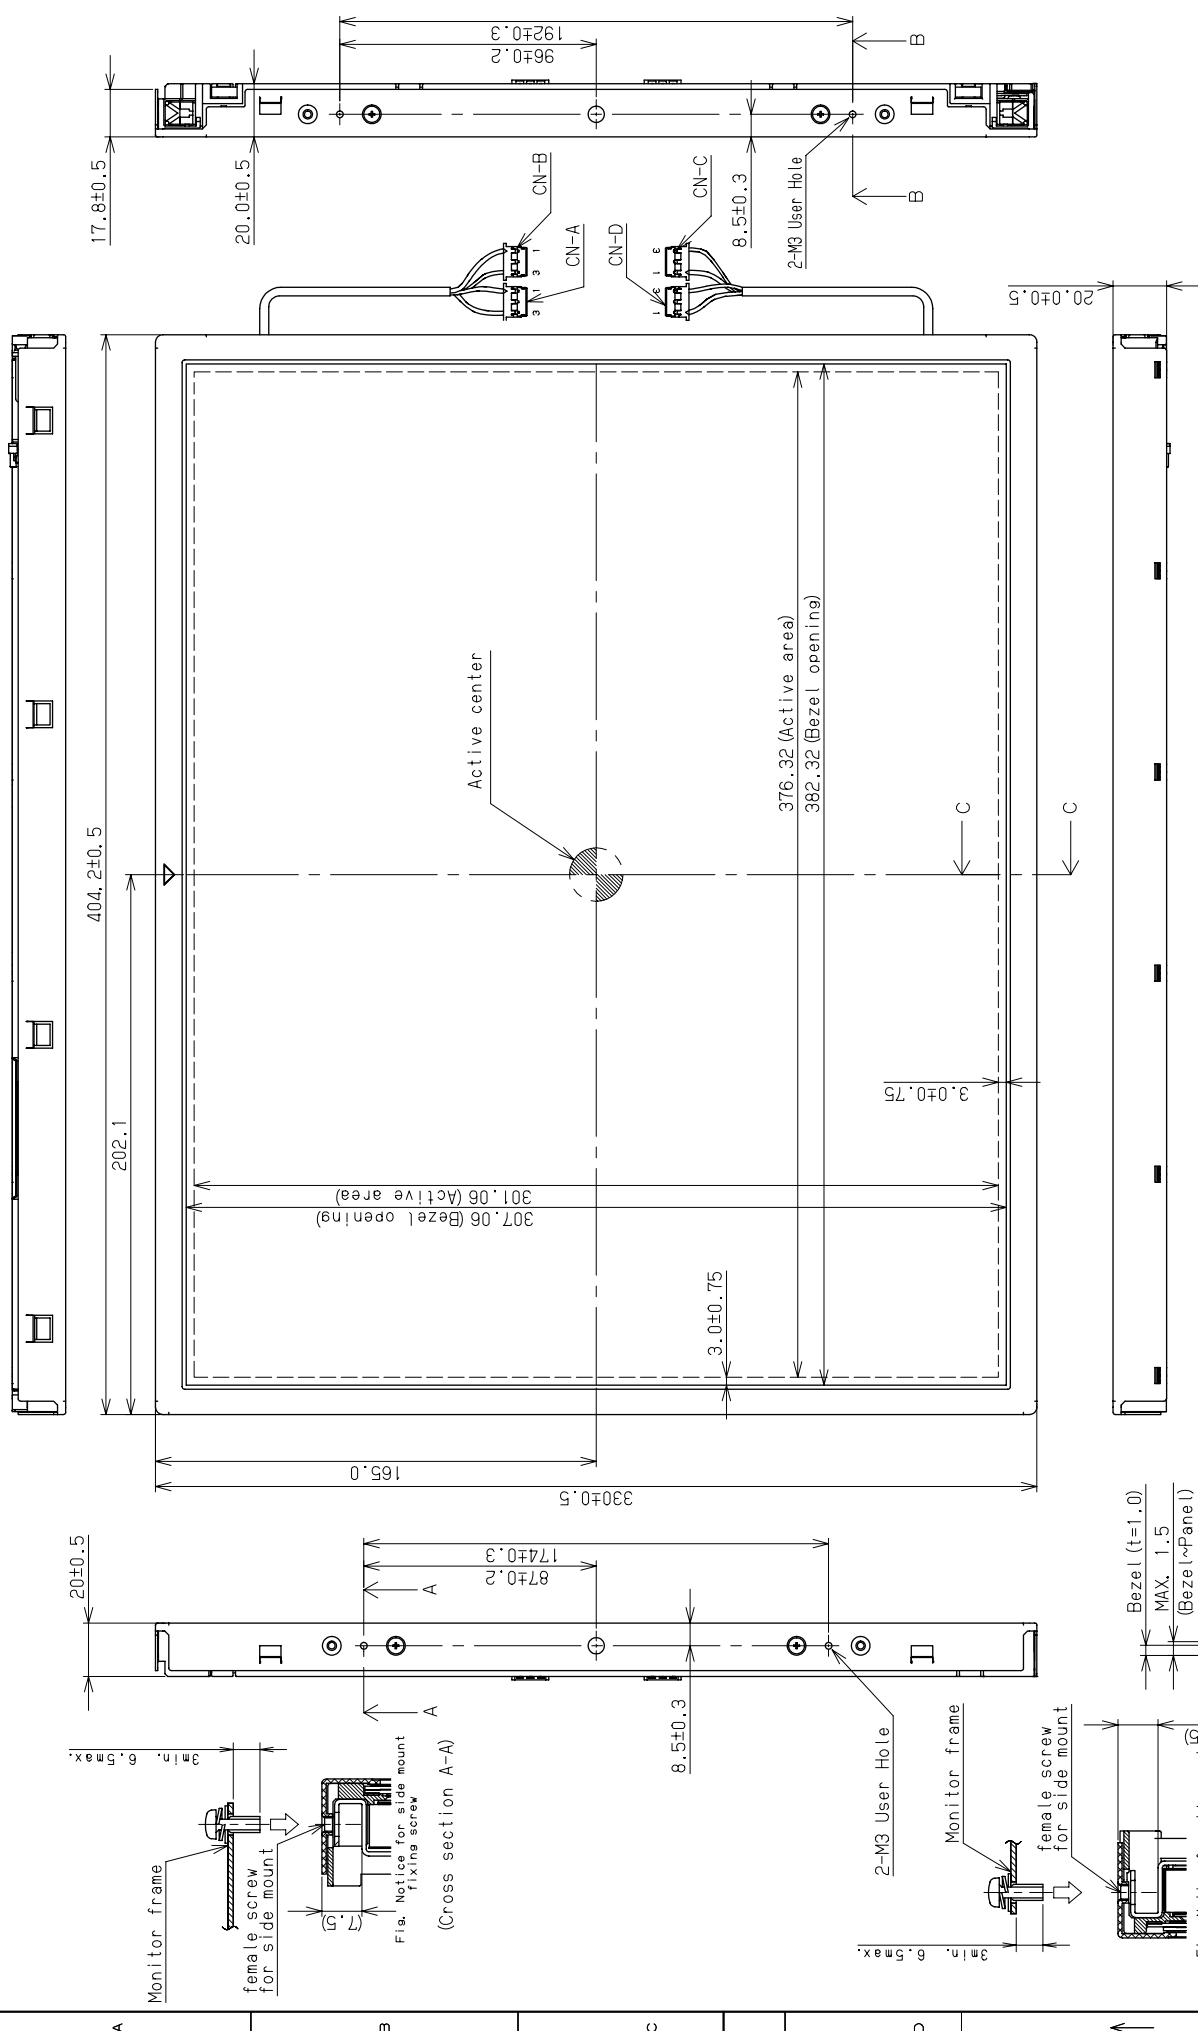


Figure 20-1 Module outline dimension (front)

[illegible]

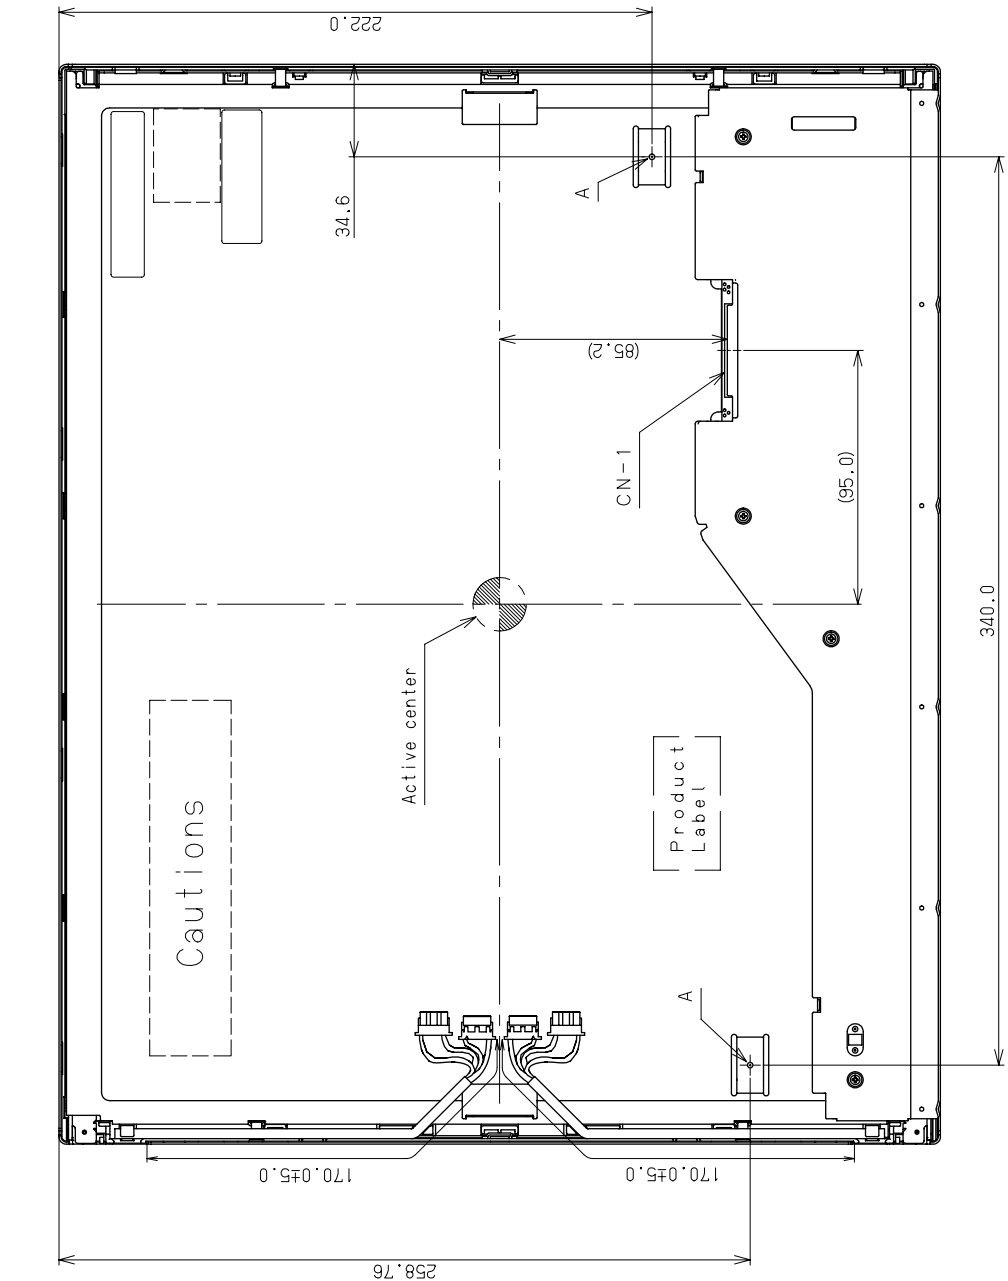


Figure 20-2 Module outline dimension (Rear)

[illegible]

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.

**NORTH AMERICA**

SHARP Microelectronics of the Americas
5700 NW Pacific Rim Blvd.
Camas, WA 98607, U.S.A.
Phone: (1) 360-834-2500
Fax: (1) 360-834-8903
Fast Info: (1) 800-833-9437
www.sharpsma.com

EUROPE

SHARP Microelectronics Europe
Division of Sharp Electronics (Europe) GmbH
Sonninstrasse 3
20097 Hamburg, Germany
Phone: (49) 40-2376-2286
Fax: (49) 40-2376-2232
www.sharpsme.com

JAPAN

SHARP Corporation
Electronic Components & Devices
22-22 Nagaike-cho, Abeno-Ku
Osaka 545-8522, Japan
Phone: (81) 6-6621-1221
Fax: (81) 6117-725300/6117-725301
www.sharp-world.com

TAIWAN

SHARP Electronic Components
(Taiwan) Corporation
8F-A, No. 16, Sec. 4, Nanking E. Rd.
Taipei, Taiwan, Republic of China
Phone: (886) 2-2577-7341
Fax: (886) 2-2577-7326/2-2577-7328

SINGAPORE

SHARP Electronics (Singapore) PTE., Ltd.
438A, Alexandra Road, #05-01/02
Alexandra Technopark,
Singapore 119967
Phone: (65) 271-3566
Fax: (65) 271-3855

KOREA

SHARP Electronic Components
(Korea) Corporation
RM 501 Geosung B/D, 541
Dohwa-dong, Mapo-ku
Seoul 121-701, Korea
Phone: (82) 2-711-5813 ~ 8
Fax: (82) 2-711-5819

CHINA

SHARP Microelectronics of China
(Shanghai) Co., Ltd.
28 Xin Jin Qiao Road King Tower 16F
Pudong Shanghai, 201206 P.R. China
Phone: (86) 21-5854-7710/21-5834-6056
Fax: (86) 21-5854-4340/21-5834-6057

Head Office:

No. 360, Bashen Road,
Xin Development Bldg. 22
Waigaoqiao Free Trade Zone Shanghai
200131 P.R. China
Email: smc@china.global.sharp.co.jp

HONG KONG

SHARP-ROXY (Hong Kong) Ltd.
3rd Business Division,
17/F, Admiralty Centre, Tower 1
18 Harcourt Road, Hong Kong
Phone: (852) 28229311
Fax: (852) 28660779
www.sharp.com.hk

Shenzhen Representative Office:

Room 13B1, Tower C,
Electronics Science & Technology Building
Shen Nan Zhong Road
Shenzhen, P.R. China
Phone: (86) 755-3273731
Fax: (86) 755-3273735