



SYNSEMI SEMICONDUCTOR

Licensed by **ON Semiconductor**,
a trademark of **Semiconductor
Components Industries, LLC** for
Zener Technology and Products.

1N4370A through 1N759A Series

500 mW DO-35 Hermetically Sealed Glass Zener Voltage Regulators

Maximum Ratings (Note 1)

| Rating | Symbol | Value | Unit |
|--|----------------|-------------|-------|
| Maximum Steady State Power Dissipation @ $T_L \leq 75^\circ\text{C}$, Lead Length = 3/8" | P_D | 500 | mW |
| Derate Above 75°C | | 4.0 | mW/°C |
| Operating and Storage Temperature Range | T_J, T_{stg} | -65 to +200 | °C |

1. Some part number series have lower JEDEC registered ratings.

Specification Features

- Zener Voltage Range = 2.4 V to 12 V
- ESD Rating of Class 3 (>16 KV) per Human Body Model
- DO-35 Package (DO-204AH)
- Double Slug Type Construction
- Metallurgical Bonding

Mechanical Characteristics


- Case** : Double slug type, hermetically sealed glass
Finish : All external surfaces are corrosion resistant and leads are readily solderable.
Polarity : Cathode indicated by polarity band
Mounting: Any

Maximum Lead Temperature for Soldering Purposes
 230°C, 1/16" from the case for 10 seconds


Ordering Information

| Device | Package | Shipping |
|--------------|------------|---------------------------------|
| 1NxxxxA | Axial Lead | 3000 Units / Box |
| 1NxxxxARL | Axial Lead | 5000 Units / Tape & Reel |
| 1NxxxxARL2 * | Axial Lead | 5000 Units / Tape & Reel |
| 1NxxxxARA1 i | Lead Form | 3000 Units / Radial Tape & Ammo |
| 1NxxxxARA2 i | Lead Form | 3000 Units / Radial Tape & Ammo |
| 1NxxxxATA | Axial Lead | 5000 Units / Tape & Ammo |
| 1NxxxxATA2 * | Axial Lead | 5000 Units / Tape & Ammo |
| 1NxxxxARR1 i | Lead Form | 3000 Units / Radial Tape & Reel |
| 1NxxxxARR2 i | Lead Form | 3000 Units / Radial Tape & Reel |


* The "2" suffix refers to 26 mm tape spacing.
 ! Polarity band **up** with cathode lead off first.
 i Polarity band **down** with cathode lead off first.



AXIAL LEAD
DO35

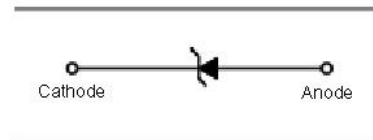

MARKING DIAGRAM




L = Logo
 1NxxxxA = Device Code
 Y = Year
 WW = Work Week

Devices listed in **bold italic** are SynSemi **Preferred** devices. **Preferred** devices are recommended choices for future use and best overall value.

1N4370A Series

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 1.5\text{ V Max @ } I_F = 200\text{ mA}$ for all types)

| Symbol | Parameter |
|----------|------------------------------------|
| V_Z | Reverse Zener Voltage @ I_{ZT} |
| I_{ZT} | Reverse Current |
| Z_{ZT} | Maximum Zener Impedance @ I_{ZT} |
| I_{ZM} | Maximum DC Zener Current |
| I_R | Reverse Leakage Current @ V_R |
| V_R | Reverse Voltage |
| I_F | Forward Current |
| V_F | Forward Voltage @ I_F |

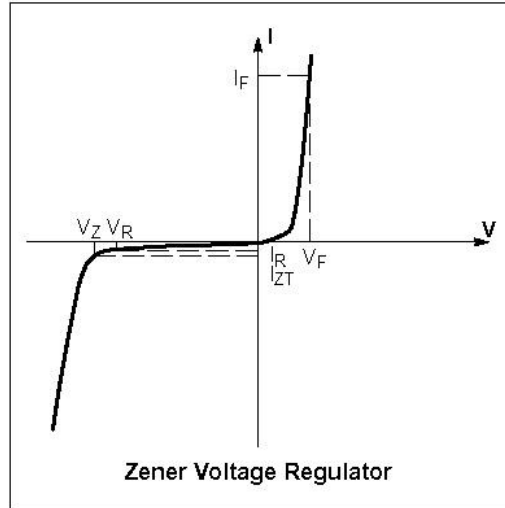

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 1.5\text{ V Max @ } I_F = 200\text{ mA}$ for all types)

| Device (Note 2.) | Device Marking | Zener Voltage (Note 3.) | | | | Z_{ZT} (Note 4.) @ I_{ZT} | I_{ZM} (Note 5.) | $I_R @ V_R = 1\text{ V}$ | |
|---------------------|-------------------|-------------------------|------------|-------------|------------|----------------------------------|--------------------|--------------------------|---------------------------|
| | | V_Z (Volts) | | | @ I_{ZT} | | | $T_A = 25^\circ\text{C}$ | $T_A = 150^\circ\text{C}$ |
| | | Min | Nom | Max | | | | | |
| 1N4370A | 1N4370A | 2.28 | 2.4 | 2.52 | 20 | 30 | 150 | 100 | 200 |
| 1N4371A | 1N4371A | 2.57 | 2.7 | 2.84 | 20 | 30 | 135 | 75 | 150 |
| 1N4372A | 1N4372A | 2.85 | 3.0 | 3.15 | 20 | 29 | 120 | 50 | 100 |
| 1N746A | 1N746A | 3.14 | 3.3 | 3.47 | 20 | 28 | 110 | 10 | 30 |
| 1N747A | 1N747A | 3.42 | 3.6 | 3.78 | 20 | 24 | 100 | 10 | 30 |
| 1N748A | 1N748A | 3.71 | 3.9 | 4.10 | 20 | 23 | 95 | 10 | 30 |
| 1N749A | 1N749A | 4.09 | 4.3 | 4.52 | 20 | 22 | 85 | 2 | 30 |
| 1N750A | 1N750A | 4.47 | 4.7 | 4.94 | 20 | 19 | 75 | 2 | 30 |
| 1N751A | 1N751A | 4.85 | 5.1 | 5.36 | 20 | 17 | 70 | 1 | 20 |
| 1N752A | 1N752A | 5.32 | 5.6 | 5.88 | 20 | 11 | 65 | 1 | 20 |
| 1N753A | 1N753A | 5.89 | 6.2 | 6.51 | 20 | 7 | 60 | 0.1 | 20 |
| 1N754A | 1N754A | 6.46 | 6.8 | 7.14 | 20 | 5 | 55 | 0.1 | 20 |
| 1N755A | 1N755A | 7.13 | 7.5 | 7.88 | 20 | 6 | 50 | 0.1 | 20 |
| 1N756A | 1N756A | 7.79 | 8.2 | 8.61 | 20 | 8 | 45 | 0.1 | 20 |
| 1N757A | 1N757A | 8.65 | 9.1 | 9.56 | 20 | 10 | 40 | 0.1 | 20 |
| 1N758A | 1N758A | 9.50 | 10 | 10.5 | 20 | 17 | 35 | 0.1 | 20 |
| 1N759A | 1N759A | 11.40 | 12 | 12.6 | 20 | 30 | 30 | 0.1 | 20 |

2. TOLERANCE AND TYPE NUMBER DESIGNATION (V_Z)

The type numbers listed have a standard tolerance on the nominal zener voltage of $\pm 5\%$.

3. ZENER VOLTAGE (V_Z) MEASUREMENT

Nominal zener voltage is measured with the device junction in the thermal equilibrium at the lead temperature (T_L) at $30^\circ\text{C} \pm 1^\circ\text{C}$ and $3/8''$, lead length.

4. ZENER IMPEDANCE (Z_Z) DERIVATION

Z_{ZT} and Z_{ZK} are measured by dividing the ac voltage drop across the device by the ac current applied. The specified limits are for $I_{Z(ac)} = 0.1 I_{Z(dc)}$ with the ac frequency = 60 Hz.

5. MAXIMUM ZENER CURRENT RATINGS (I_{ZM})

Values shown are based on the JEDEC rating of 400 mW where the actual zener voltage (V_Z) is known at the operating point, the maximum zener current may be increased and is limited by the derating curve.

1N4370A Series

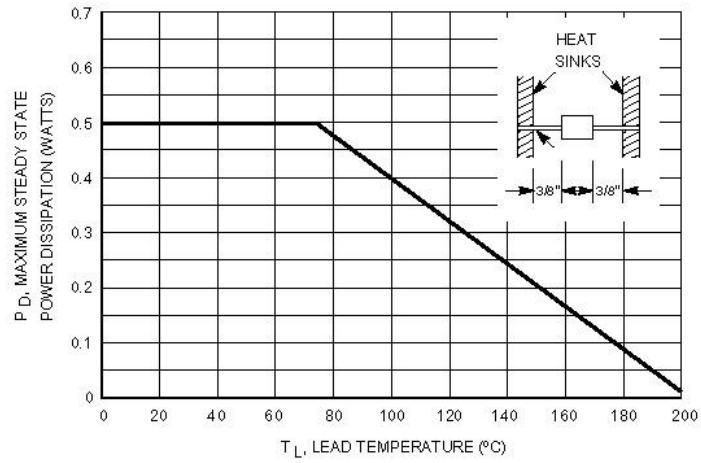


Figure 1. Steady State Power Derating

1N4370A Series

APPLICATION NOTE - ZENER VOLTAGE

Since the actual voltage available from a given zener diode is temperature dependent, it is necessary to determine junction temperature under any set of operating conditions in order to calculate its value. The following procedure is recommended:

Lead Temperature, T_L , should be determined from:

$$T_L = \theta_{LA} P_D + T_A$$

θ_{LA} is the lead-to-ambient thermal resistance ($^{\circ}\text{C}/\text{W}$) and P_D is the power dissipation. The value for θ_{LA} will vary and depends on the device mounting method. θ_{LA} is generally 30 to $40^{\circ}\text{C}/\text{W}$ for the various clips and tie points in common use and for printed circuit board wiring.

The temperature of the lead can also be measured using a thermocouple placed on the lead as close as possible to the tie point. The thermal mass connected to the tie point is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady-state conditions are achieved. Using the measured value of T_L , the junction temperature may be determined by:

$$T_J = T_L + \Delta T_{JL}$$

ΔT_{JL} is the increase in junction temperature above the lead temperature and may be found from Figure 2 for dc power:

$$\Delta T_{JL} = \theta_{JL} P_D$$

For worst-case design, using expected limits of I_Z , limits of P_D and the extremes of T_J (ΔT_J) may be estimated. Changes in voltage, V_Z , can then be found from:

$$\Delta V = \theta_{VZ} T_J$$

θ_{VZ} , the zener voltage temperature coefficient, is found from Figures 4 and 5.

Under high power-pulse operation, the zener voltage will vary with time and may also be affected significantly by the zener resistance. For best regulation, keep current excursions as low as possible.

Surge limitations are given in Figure 7. They are lower than would be expected by considering only junction temperature, as current crowding effects cause temperatures to be extremely high in small spots, resulting in device degradation should the limits of Figure 7 be exceeded.

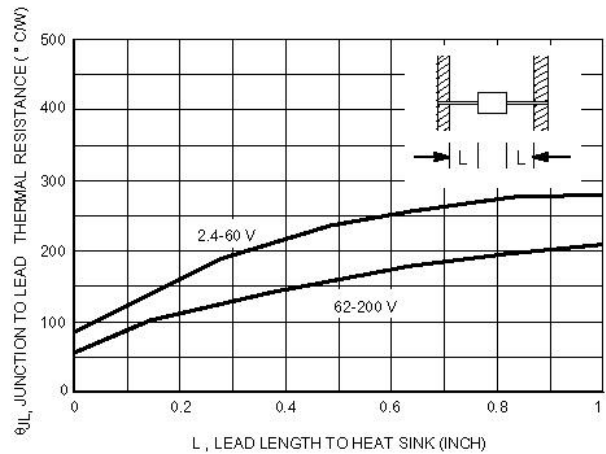


Figure 2. Typical Thermal Resistance

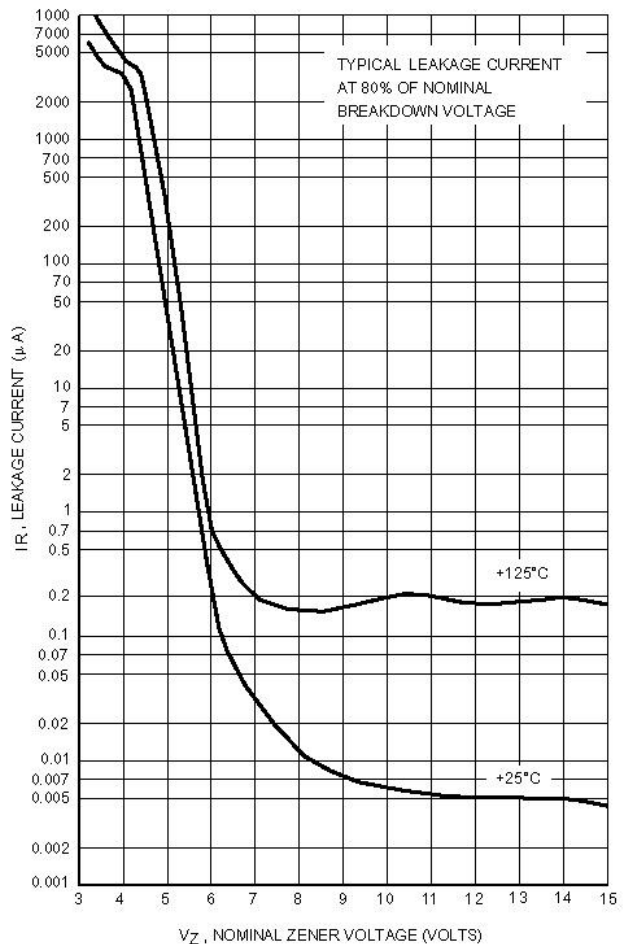


Figure 3. Typical Leakage Current

1N4370A Series

TEMPERATURE COEFFICIENTS

(-55°C to +150°C temperature range; 90% of the units are in the ranges indicated.)

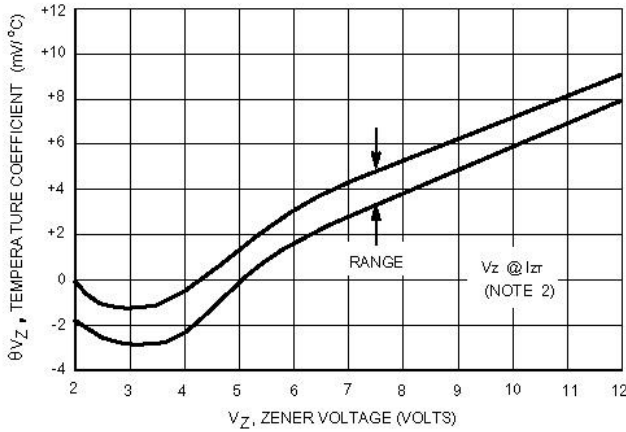


Figure 4a. Range for Units to 12 Volts

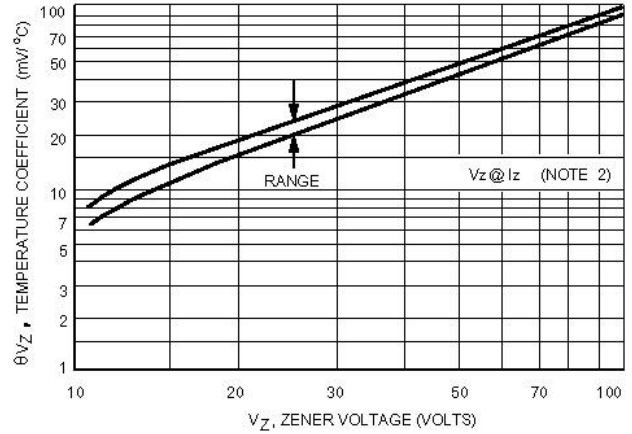


Figure 4b. Range for Units 12 to 100 Volts

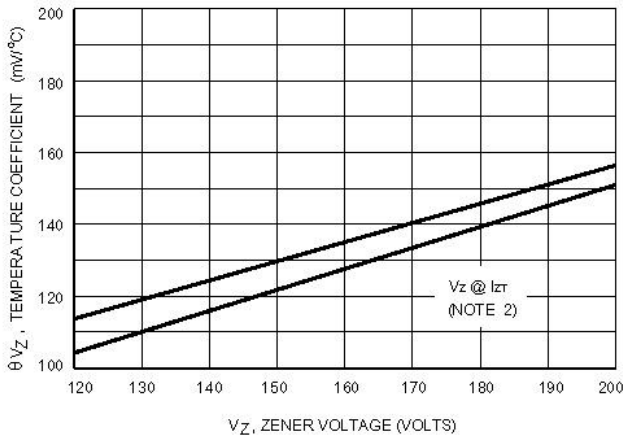


Figure 4c. Range for Units 120 to 200 Volts

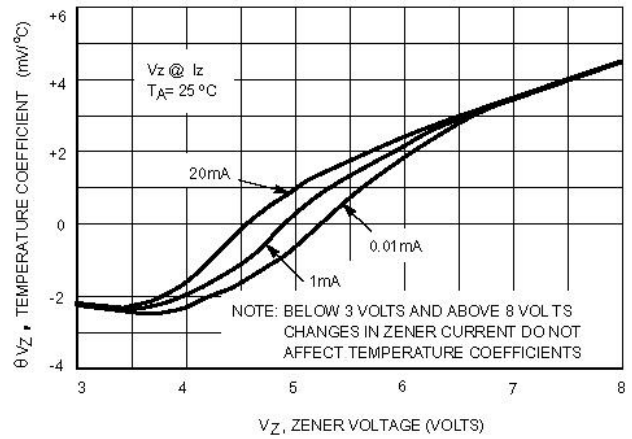


Figure 5. Effect of Zener Current

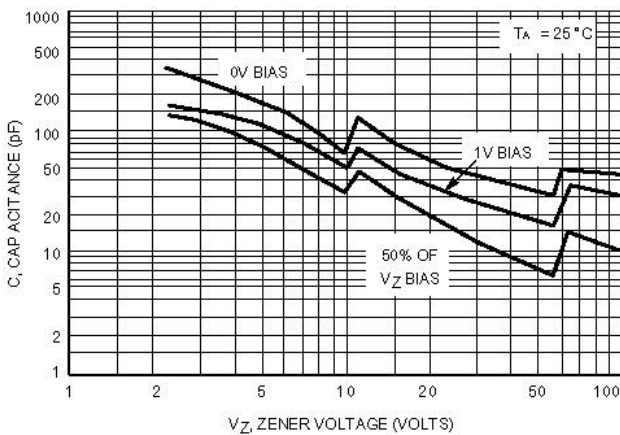


Figure 6a. Typical Capacitance 2.4-100 Volts

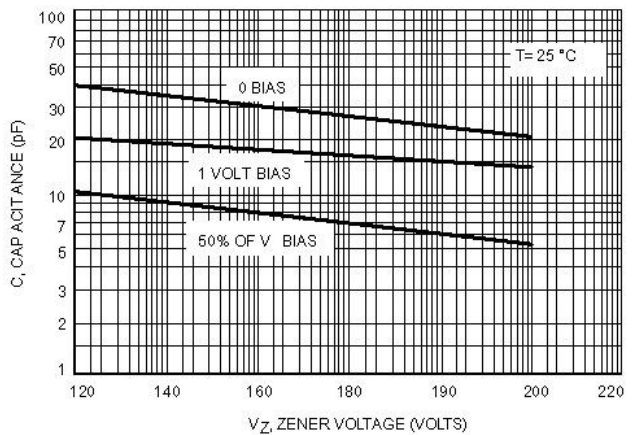


Figure 6b. Typical Capacitance 120-200 Volts

1N4370A Series

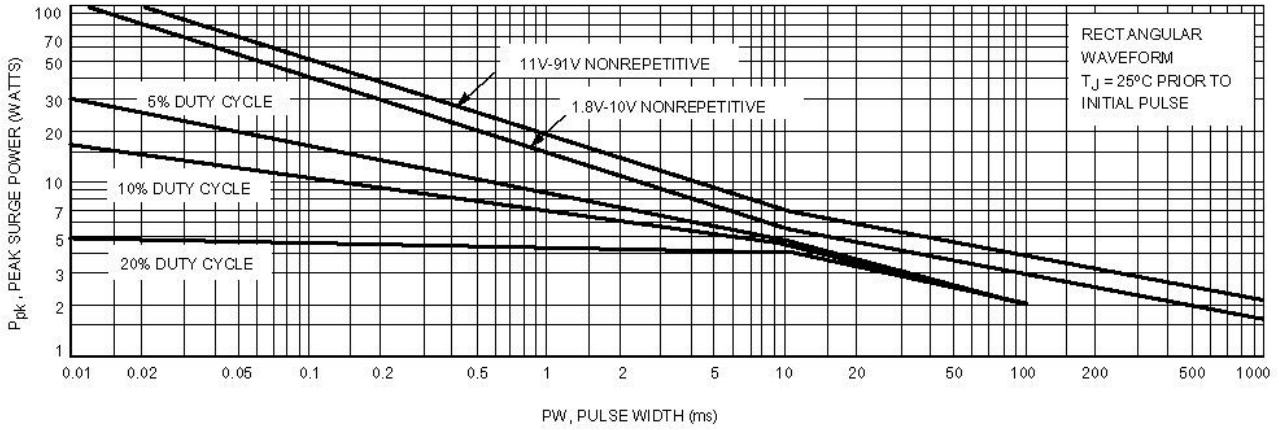


Figure 7a. Maximum Surge Power 1.8-91 Volts

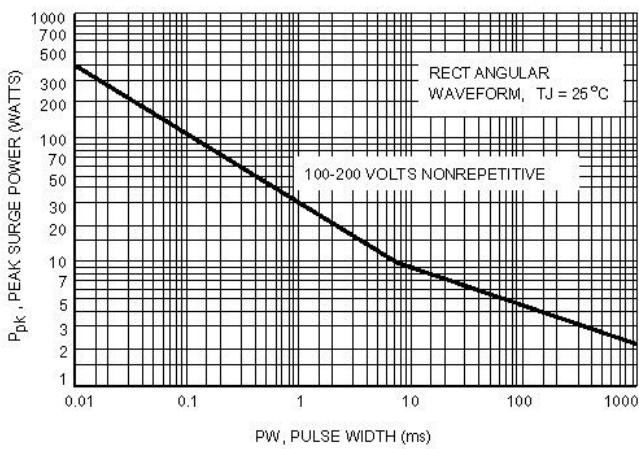


Figure 7b. Maximum Surge Power DO-35
100-200Volts

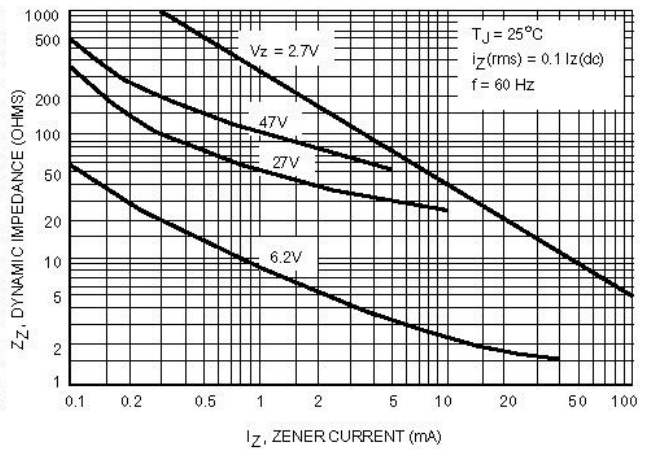


Figure 8. Effect of Zener Current on
Zener Impedance

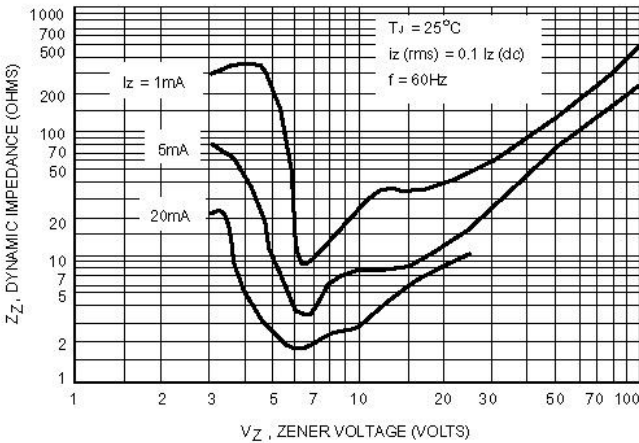


Figure 9. Effect of Zener Voltage on Zener Impedance

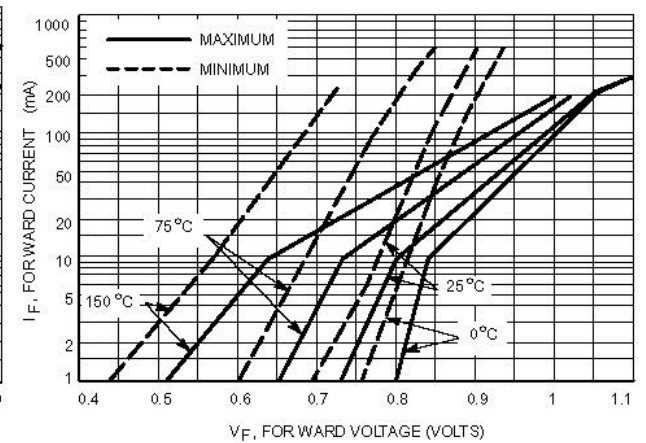


Figure 10. Typical Forward Characteristics

1N4370A Series

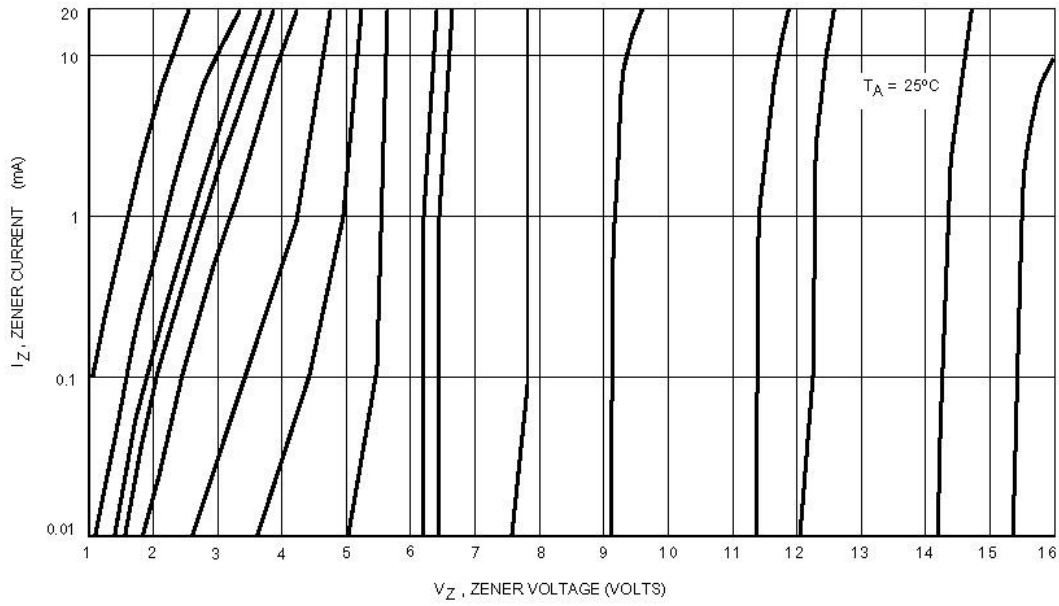


Figure 1 1. Zener Voltage versus Zener Current - $V_Z = 1$ thru 16 Volts

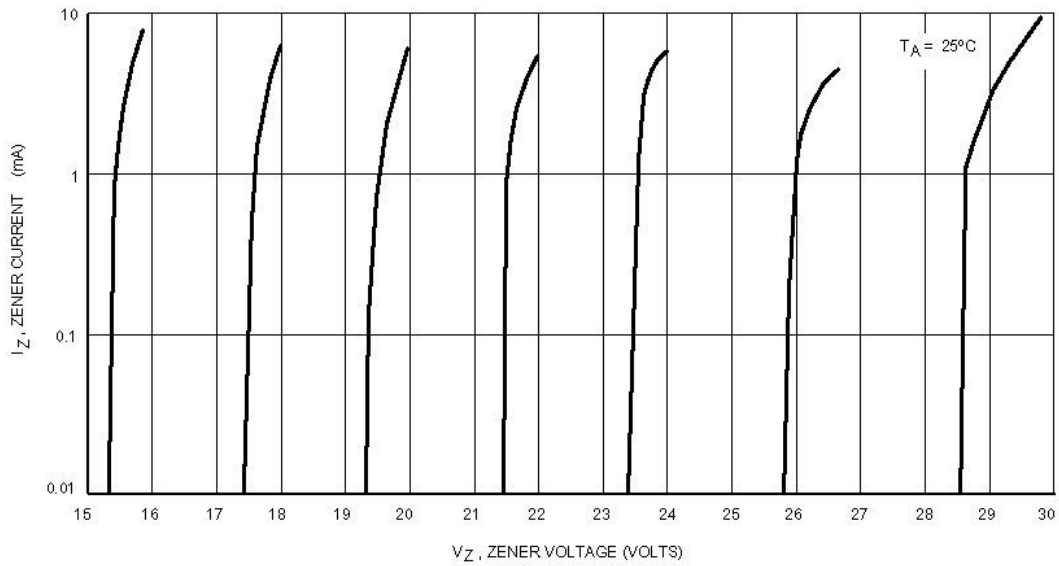


Figure 12. Zener Voltage versus Zener Current - $V_Z = 15$ thru 30 Volts

1N4370A Series

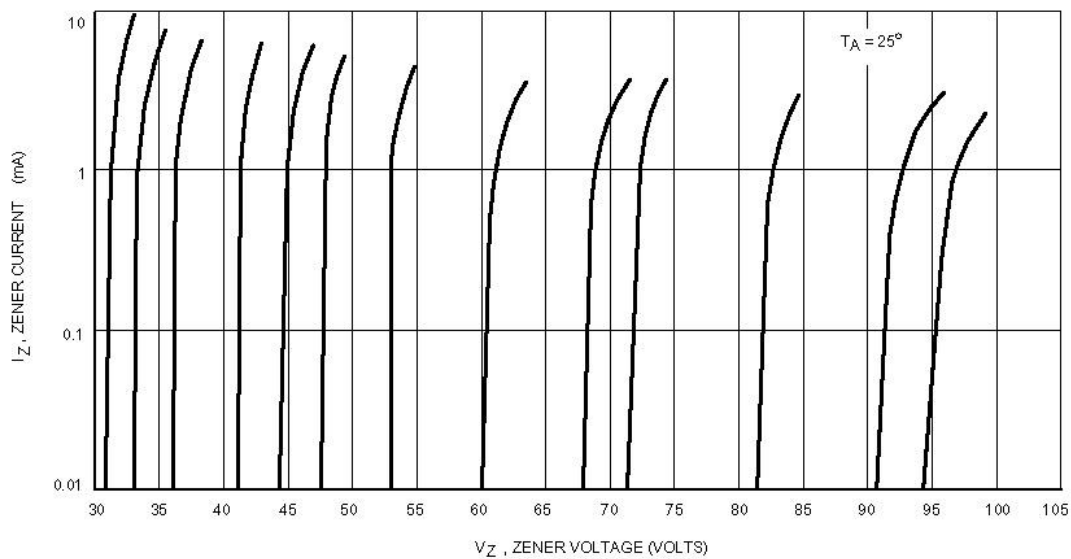


Figure 13. Zener Voltage versus Zener Current - $V_Z = 30$ thru 105 Volts

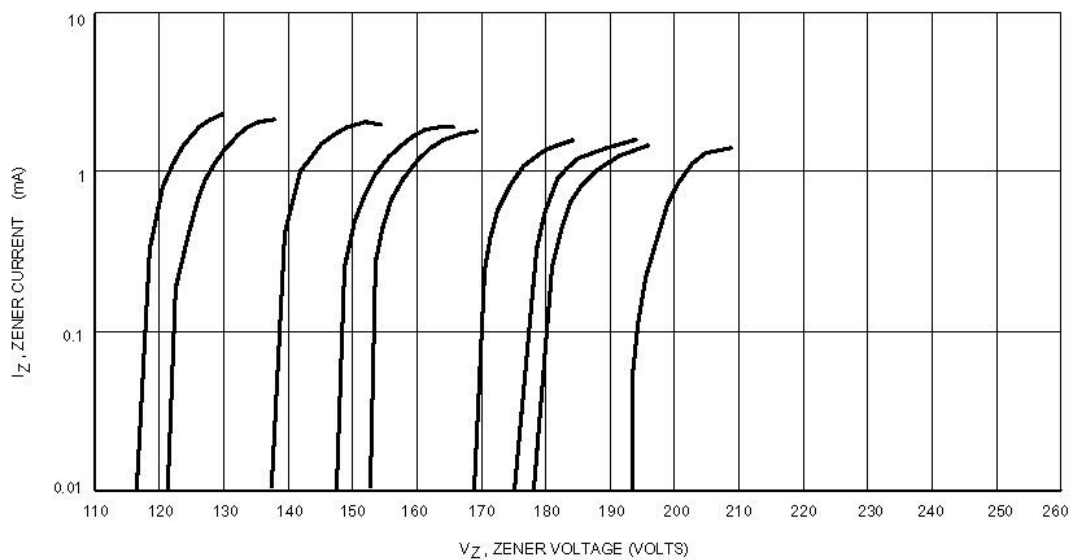


Figure 14. Zener Voltage versus Zener Current - $V_Z = 110$ thru 220 Volts