

## NON-ISOLATED DC/DC CONVERTERS

5.0 V Input 1.2 V-3.3 V/15 A Output

**bel**  
POWER PRODUCTS

### V7PF-15B1AC

- Non-Isolated
- Fixed Frequency (300 kHz)
- Remote On/Off
- Low Cost
- Power Good Output Signal (open collector)
- Wide Trim Range
- Under-voltage Lockout (UVLO)
- OCP/SCP
- Converter Can Sink and Source Current



### Description

The Bel V7PF-15B1AC is part of the low cost non-isolated dc/dc converter series. The modules use a SIP package for ease of layout and space savings. The output is closely regulated and can be trimmed from 1.2 V to 3.3 V. The efficiency is typically 93% at 3.3 V output at full load. Typical features include remote on/off, under-voltage lockout, over-current protection and short circuit protection.

### Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number
1.2 V - 3.3 V	5 V	15 A	49.5 W	93%	V7PF-15B1AC

**Note:** Add "0" suffix at the end of the model number to indicate "Tube Packaging", and "G" for "Tray Packaging".

### Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	7 V	
Output Enable Terminal Voltage	-0.3 V	-	7 V	
Ambient Temperature	0 °C	-	80 °C	
Storage Temperature	-40 °C	-	125 °C	

### Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	4.5 V	5 V	5.5 V	
Input Current (Source)				
Vo=3.3 V	-	11.7 A	12.5 A	
Vo=1.8 V	-	6.8 A	7.4 A	
Vo=1.2 V	-	4.8 A	5.2 A	
Input Current (Sink)				
Vo=3.3 V	-	-10 A	-7.8 A	
Vo=1.8 V	-	-5 A	-3.8 A	
Vo=1.2 V	-	-3 A	-2.3 A	
No Load Input Current	-	35 mA	-	
Remote Off Input Current	-	10 mA	22 mA	
Input Reflected Ripple Current (pk-pk)	-	90 mA	150 mA	Tested with simulated source impedance of 500 nH, 5 Hz to 20 mHz and five 10 uF/10 V capacitors (P/N: C3216X5R1A106K, TDK) at the input
Input Reflected Ripple Current (rms)	-	20 mA	40 mA	
I <sup>2</sup> t Inrush Current Transient	-	0.02 A <sup>2</sup> s	0.05 A <sup>2</sup> s	
Turn-on Voltage Threshold	-	4.25 V	-	
Turn-off Voltage Threshold	-	4 V	-	

**Note:** All specifications are typical at 25 °C unless otherwise stated.

## NON-ISOLATED DC/DC CONVERTERS

5.0 V Input 1.2 V-3.3 V/15 A Output



### Output Specifications

Parameter		Min	Typ	Max	Notes
Output Voltage Set Point	Vo=3.3 V Vo=1.8 V Vo=1.2 V	3.234 V 1.764 V 1.176 V	3.3 V 1.8 V 1.2 V	3.366 V 1.836 V 1.224 V	Test condition: Vin=5 V, Iout=50% full load
Load Regulation	Vo=3.3 V Vo=1.8 V Vo=1.2 V	- - -	5 mV 3 mV 2 mV	8 mV 5 mV 4 mV	Line/Load regulation is the deviation from nominal to minimum and maximum line/load.
Line Regulation	Vo=3.3 V Vo=1.8 V Vo=1.2 V	- - -	2 mV 1 mV 1 mV	5 mV 3 mV 2 mV	
Regulation Over Temperature (0°C to +80 °C)	Vo=3.3 V Vo=1.8 V Vo=1.2 V	- - -	13 mV 9 mV 8 mV	28 mV 18 mV 15 mV	
Output Ripple and Noise (pk-pk)		-	30 mV	50 mV	Tested at 0-20 MHz BW with 1000 uF electrolytic capacitor & five 10 uF/10 V TDK C3216X5R1A106K capacitors and 0.1 uF ceramic capacitor at the output
Output Ripple and Noise (rms)		-	5 mV	15 mV	
Output Current		-15 A	-	15 A	
Current Limit Threshold		19 A	-	35 A	
Short Circuit Surge Transient		-	0.5 A <sup>2</sup> s	1 A <sup>2</sup> s	
Turn on Time		-	10 mS	20 mS	
Overshoot at Turn on		-	0%	3%	
Output Capacitance	Vo=3.3 V Vo=1.8 V Vo=1.2 V	- - -	- - -	13200 uF 16400 uF 17600 uF	
Transient Response					
50% ~ 100% Max Load	Vo=1.2 V- 3.3 V	-	35 mV	50 mV	Test conditions: di/dt = 0.1 A/uS; Vin = 5 V; with 1000 uF electrolytic capacitor and five 10 uF/10 V TDK C3216X5R1A106K ceramic capacitors at the output
Settling Time		-	50 uS	100 uS	
100% ~ 50% Max Load		-	35 mV	50 mV	
Settling Time		-	50 uS	100 uS	

**Note:** All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

## NON-ISOLATED DC/DC CONVERTERS

5.0 V Input 1.2 V-3.3 V/15 A Output



### General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency (Current Source)				Measured at Vin=5 V, full load.
Vo=3.3 V	89%	93%	-	
Vo=1.8 V	83%	87%	-	
Vo=1.2 V	80%	82%	-	
Efficiency (Current Sink)				
Vo=3.3 V	86%	90%	-	
Vo=1.8 V	79%	83%	-	
Vo=1.2 V	72%	75%	-	
Switching Frequency	275 kHz	300 kHz	325 kHz	
Output Voltage Trim Range	1.2 V	-	3.3 V	
MTBF	4,573,743 hours			Calculated Per Bell Core TR-332 (Io = Nominal; Ta = 25°C)
Dimensions				
Inches (L x W x H)	1.2 x 1.0 x 0.457			
Millimeters (L x W x H)	30.48 x 25.4 x 11.6			
Weight	-	13 g	-	

**Note:** All specifications are typical at 25 °C unless otherwise stated.

### Control Specifications

Parameter	Min	Typ	Max	Notes
<b>Remote On/Off</b>				
Signal Low (Unit Off)	-0.3 V	-	0.8 V	
Signal High (Unit On)	2.4 V	-	7 V	
Power Good Delay <sup>1</sup>	-	-	10 mS	
Signal Low <sup>2</sup>	-	0.3 V	-	
Current Sink	-	5 mA	-	


**Notes:** All specifications are typical at 25 °C unless otherwise stated.

1. Power good delay time is the time from output voltage in full regulation to power good asserted.
2. The power good signal is an open collector output. When the output of the module is higher than 90% of the nominal set point, the power good pin is high.

### Output Trim Equation

Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) is shown below. The Rtrim resistor should be connected between the Trim pin and Ground.

$$V_{adj} = \left( \frac{0.992}{5.62K} + \frac{0.992}{R_{trim}} \right) \cdot 1.18K + 0.992$$



### Power Good Signal Level Set

Equation for calculating the power good threshold (in kΩ) given the desired adjusted voltage (Vadj) is shown below. The Rset resistor should be connected between the PG\_set pin (Pin 9) and Ground.


$$PG\_Threshold = 6.19K \left( \frac{1.24}{2.21K + R_{set}} - 18.86 \cdot 10^{-6} \right) + 1.24$$

## NON-ISOLATED DC/DC CONVERTERS


5.0 V Input 1.2 V-3.3 V/15 A Output




### Efficiency Data

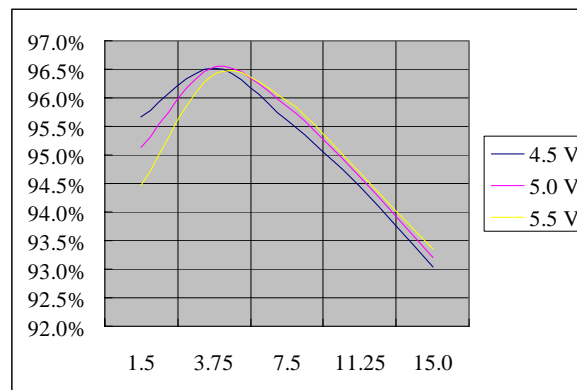

$V_o = 3.3\text{ V}$

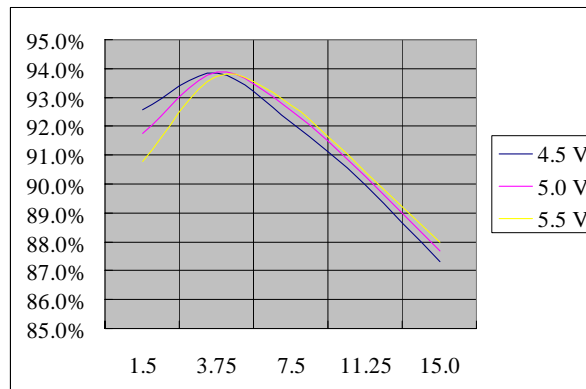

$V_o = 1.8\text{ V}$

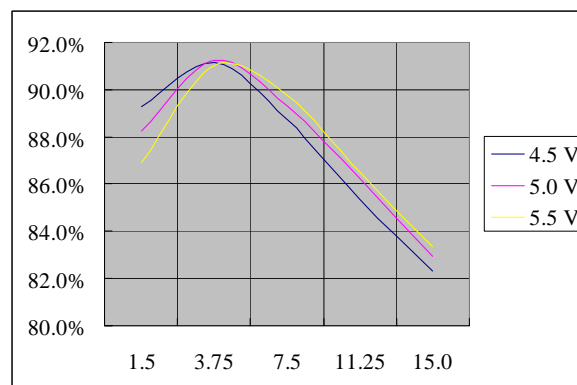


$V_o = 1.2\text{ V}$

## NON-ISOLATED DC/DC CONVERTERS


5.0 V Input 1.2 V-3.3 V/15 A Output




### Thermal Derating Curves

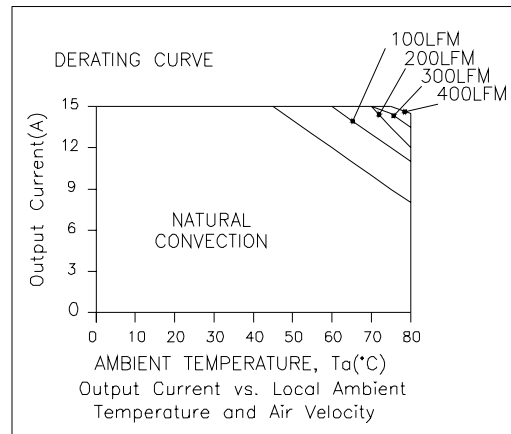

$V_o=3.3\text{ V}$

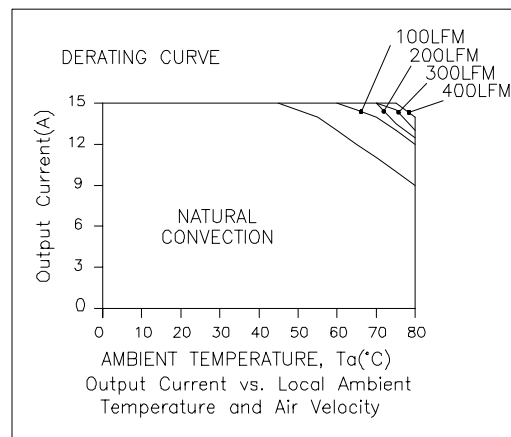

$V_o=1.8\text{ V}$




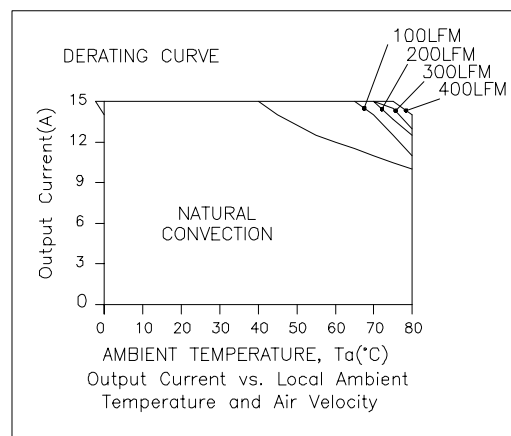


$V_o=1.2\text{ V}$

# NON-ISOLATED DC/DC CONVERTERS

5.0 V Input 1.2 V-3.3 V/15 A Output

**bel**  
POWER PRODUCTS

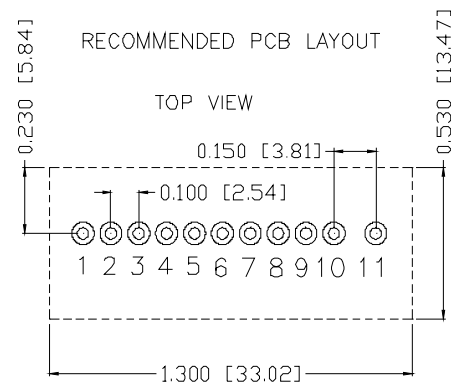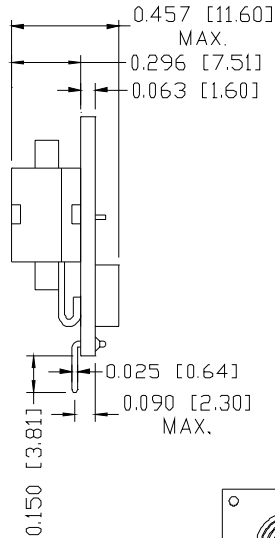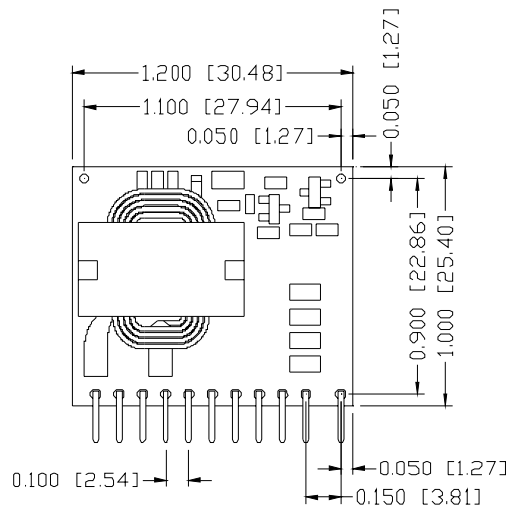

HOLE SIZE:  $\varnothing 0.040 \pm 0.003$  [1.02  $\pm$  0.08]

PAD SIZE:  $\varnothing 0.079 \pm 0.002$  [2.00  $\pm$  0.05]

## Pin Connections

Pin	Function
1	Vo+
2	Vo+
3	Vo+
4	Trim
5	Remote On/Off
6	Power Good
7	Ground
8	Ground
9	PG_Set
10	Vin+
11	Vin+

©2005 Bel Fuse Inc. Specifications subject to change without notice. 040805

## CORPORATE

**Bel Fuse Inc.**  
206 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
[www.belfuse.com](http://www.belfuse.com)

## FAR EAST

**Bel Fuse Ltd.**  
8F/ 8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706  
[www.belfuse.com](http://www.belfuse.com)

## EUROPE

**Bel Fuse Europe Ltd.**  
Preston Technology Management Centre  
Marsh Lane, Suite G7, Preston  
Lancashire, PR1 8UD, U.K.  
Tel 44-1772-556601  
Fax 44-1772-888366  
[www.belfuse.com](http://www.belfuse.com)