

Monitoring Relays

1-Phase True RMS AC/DC Over or Under Voltage

Types DUB01, PUB01

CARLO GAVAZZI



DUB01



PUB01

- TRMS AC/DC over or under voltage monitoring relays
- Selection of measuring range by DIP-switches
- Measuring ranges from 0.1 to 500 V AC/DC
- Adjustable voltage on relative scale
- Adjustable hysteresis on relative scale
- Adjustable delay function (0.1 to 30 s)
- Programmable latching or inhibit at set level
- Output: 8 A SPDT relay N.D. or N.E. selectable
- For mounting on DIN-rail in accordance with DIN/EN 50 022 (DUB01) or plug-in module (PUB01)
- 22.5 mm Euronorm housing (DUB01) or 36 mm plug-in module (PUB01)
- LED indication for relay, alarm and power supply ON

Product Description

DUB01 and PUB01 are precise TRMS AC/DC over or under voltage (selectable by DIP-switch) monitoring relays. Owing to the built-in latch function, the ON-position of the relay output can be

maintained. Inhibit function can be used to avoid relay operation when not desired (maintenance, transitions). The LED's indicate the state of the alarm and the output relay.

Ordering Key

DUB 01 C B23 10V

Housing _____
 Function _____
 Type _____
 Item number _____
 Output _____
 Power supply _____
 Range _____

Type Selection

| Mounting | Output | Measuring range | Supply: 24 VDC | Supply: 48 VDC | Supply: 24/48 VAC | Supply: 115/230 VAC |
|----------|--------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| DIN-rail | SPDT | 0.1 to 10 V AC/DC 2 to 500 V AC/DC | DUB 01 C 724 10V DUB 01 C 724 500V | DUB 01 C 748 10V DUB 01 C 748 500V | DUB 01 C B48 10V DUB 01 C B48 500V | DUB 01 C B23 10V DUB 01 C B23 500V |
| Plug-in | SPDT | 0.1 to 10 V AC/DC 2 to 500 V AC/DC | PUB 01 C 724 10V PUB 01 C 724 500V | PUB 01 C 748 10V PUB 01 C 748 500V | PUB 01 C B48 10V PUB 01 C B48 500V | PUB 01 C B23 10V PUB 01 C B23 500V |

Input Specifications

| | | | | |
|---|------------------------------------|-------------------|--|--|
| Input (voltage level) DUB01 PUB01 | Terminals Y1, Y2 Terminals 5, 7 | | Contact input DUB01 PUB01 Disabled Enabled Latch disable | Terminals Z1, Y1 Terminals 8, 9 > 10 kΩ < 500 Ω > 500 ms |
| Measuring ranges Direct Selectable by DIP-switches ..10V: 0.1 to 1 V AC/DC 0.2 to 2 V AC/DC 0.5 to 5 V AC/DC 1 to 10 V AC/DC Max. voltage for 1 s ..500V: 2 to 20 V AC/DC 5 to 50 V AC/DC 20 to 200 V AC/DC 50 to 500 V AC/DC Max. voltage for 1 s | Int. resist. | Max. volt. | | |
| | >200 kΩ | 100 V | | |
| | >200 kΩ | 100 V | | |
| | >200 kΩ | 100 V | | |
| | >200 kΩ | 100 V | | |
| | | 200 V | | |
| | >500 kΩ | 350 V | | |
| | >500 kΩ | 350 V | | |
| | >500 kΩ | 600 V | | |
| | >500 kΩ | 600 V | | |
| | | 1000 V | | |

Note:

The input voltage cannot raise over 300 VAC/DC with respect to ground (PUB01 only)

Output Specifications

| | |
|--|--|
| Output | SPDT relay |
| Rated insulation voltage | 250 VAC |
| Contact ratings (AgSnO ₂) | μ |
| Resistive loads AC 1 | 8 A @ 250 VAC |
| DC 12 | 5 A @ 24 VDC |
| Small inductive loads AC 15 | 2.5 A @ 250 VAC |
| DC 13 | 2.5 A @ 24 VDC |
| Mechanical life | ≥ 30 x 10 ⁶ operations |
| Electrical life | ≥ 10 ⁵ operations (at 8 A, 250 V, cos φ = 1) |
| Operating frequency | ≤ 7200 operations/h |
| Dielectric strength | |
| Dielectric voltage | ≥ 2 kVAC (rms) |
| Rated impulse withstand volt. | 4 kV (1.2/50 μs) |

Supply Specifications

| | | |
|--|--|------------------|
| Power supply | Overvoltage cat. III (IEC 60664, IEC 60038) | |
| Rated operational voltage through terminals: | | |
| A1, A2 or A3, A2 (DUB01) | | |
| 2, 10 or 11, 10 (PUB01) | | |
| 724: | 24 VDC ± 20%, insulated | |
| 748: | 48 VDC ± 20%, insulated | |
| B48: | 24/48 VAC ± 15% | |
| | 45 to 65 Hz, insulated | |
| B23: | 115/230 VAC ± 15% | |
| | 45 to 65 Hz, insulated | |
| Dielectric voltage | DC supply | AC supply |
| Supply to input | 2 kV | 4 kV |
| Supply to output | 4 kV | 4 kV |
| Input to output | 4 kV | 4 kV |
| Rated operational power | | |
| AC | 4 VA | |
| DC | 3 W | |

General Specifications

| | |
|------------------------|--|
| Power ON delay | 1 s ± 0.5 s or 6 s ± 0.5 s |
| Reaction time | (input signal variation from -20% to +20% or from +20% to -20% of set value) |
| Alarm ON delay | < 100 ms |
| Alarm OFF delay | < 100 ms |
| Accuracy | (15 min warm-up time) |
| Temperature drift | ± 1000 ppm/°C |
| Delay ON alarm | ± 10% on set value ± 50 ms |
| Repeatability | ± 0.5% on full-scale |
| Indication for | |
| Power supply ON | LED, green |
| Alarm ON | LED, red (flashing 2 Hz during delay time) |
| Output relay ON | LED, yellow |
| Environment | |
| Degree of protection | IP 20 |
| Pollution degree | 3 (DUB01), 2 (PUB01) |
| Operating temperature | -20 to 60°C, R.H. < 95% |
| Storage temperature | -30 to 80°C, R.H. < 95% |
| Housing | |
| Dimensions | DUB01 22.5 x 80 x 99.5 mm PUB01 36 x 80 x 94 mm |
| Weight | Approx. 150 g |
| Screw terminals | |
| Tightening torque | Max. 0.5 Nm acc. to IEC 60947 |
| Approvals | UL, CSA (except 748) |
| CE Marking | Yes |
| EMC | |
| Immunity | Electromagnetic Compatibility |
| Emission | According to EN 61000-6-2 According to EN 61000-6-3 |

Mode of Operation

DUB01 and PUB01 monitor both AC and DC over or under voltage.

Example 1

(no connection between terminals Z1, Y1 or 8, 9 - latch function disabled)

The relay operates when the measured value exceeds (or drops below) the set level for more than the set delay time.

It releases when the voltage

drops below (or exceeds) the set level (see hysteresis setting), or when power supply is interrupted.

Example 2

(connection between terminals Z1, Y1 or 8, 9 - latch function enabled)

The relay operates and latches in operating position when the measured value exceeds (or drops below) the set level for more than

the set delay time.

Provided that the voltage has dropped below (or has exceeded) the set point (see hysteresis setting) the relay releases when the interconnection between terminals Z1, Y1 or 8, 9 is interrupted, or power supply is interrupted as well.

The red LED flashes until the delay time has expired or the measured value has dropped below the set point (see hysteresis setting).


Note

When the inhibit contact is opened, if the input signal is already in alarm position, the delay time needs to elapse before relay activation.

Function/Range/Level and Time Delay Setting

Adjust the input range setting the DIP switches 1 and 2 as shown below.

Select the desired function setting the DIP switches 3 to 6 as shown below.
To access the DIP switches open the grey plastic cover as shown below.

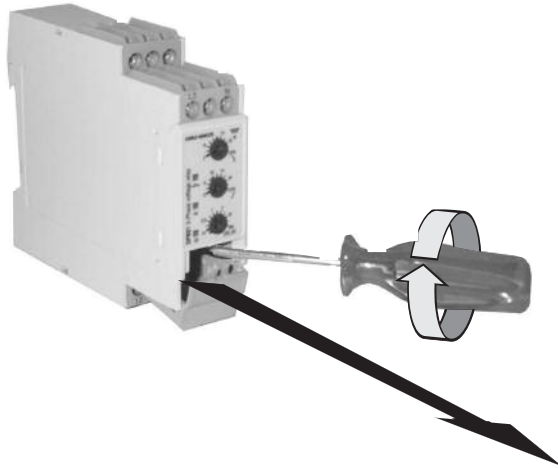


Selection of level and time delay:

Upper knob:
Setting of hysteresis on relative scale: 0 to 30% on set value.


Centre knob:
Voltage level setting on relative scale: 10 to 110% on full scale.

Lower knob:
Setting of delay on alarm time on absolute scale (0.1 to 30 s).

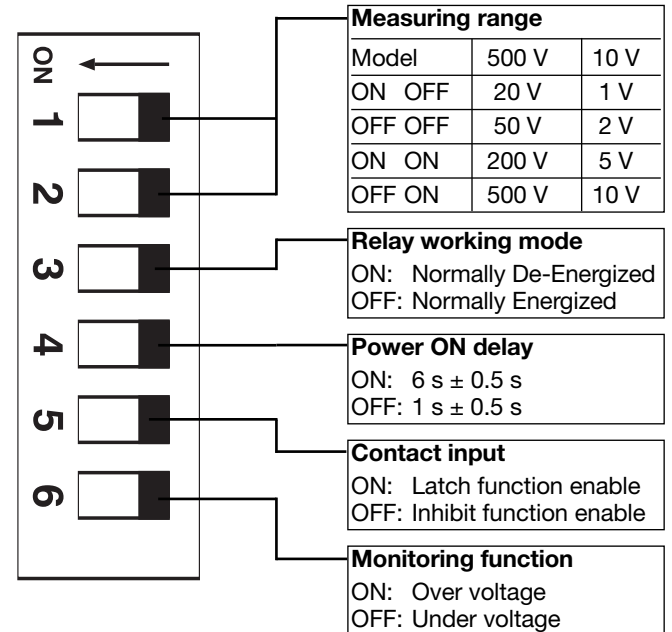


Operation Diagrams


Over voltage - N.D. relay

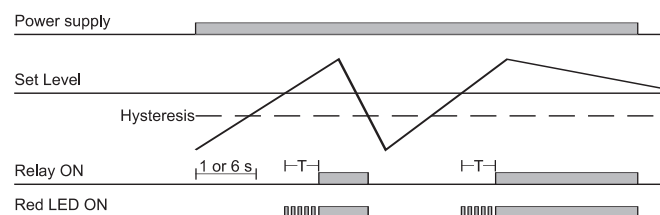


Under voltage - Latch function - N.D. relay

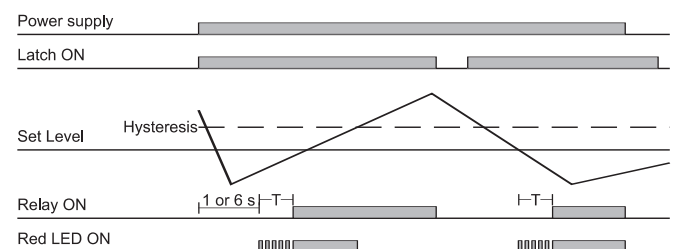

Under voltage - N.D. relay

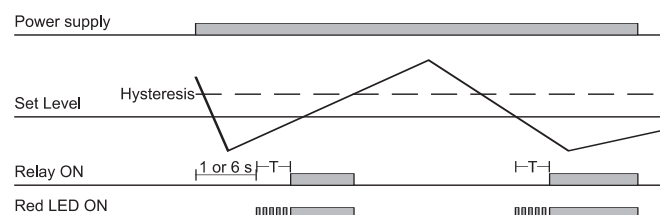


Over voltage - Inhibit function - N.D. relay

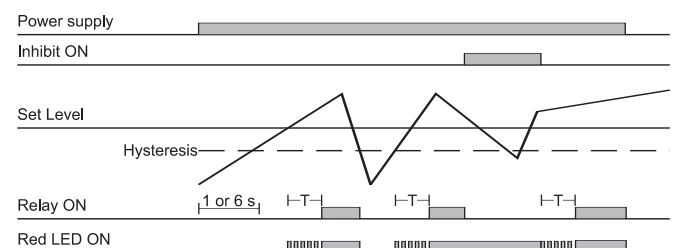




Wiring Diagrams

Example 1

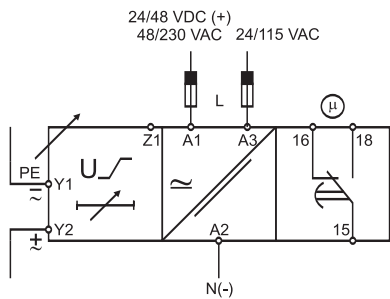


Example 2

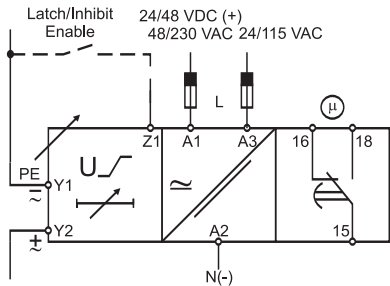


DUB01

Example 1

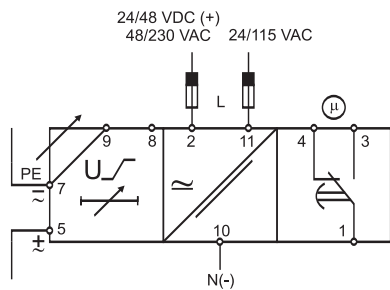


Example 2

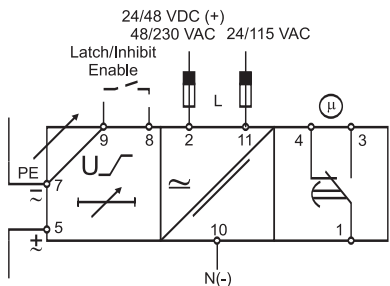

PUB01

Dimensions

DIN-rail

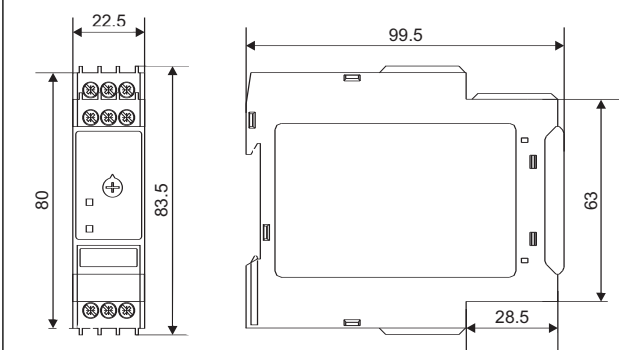

Plug-in

