

Solid State Relays PCB, 1-Phase ZS/IO Type RP 130 ...-.-., RP 132 ...-.-.

CARLO GAVAZZI



- AC Solid State Relay for PCB mounting
- Zero or instant-on switching
- Rated operational current: 2 and 4 AAC
- Non-repetitive voltage: Up to 850 Vp
- Rated operational voltage range: Up to 400 VACrms
- Input range: 3 to 32 VDC
- Insulation: OPTO (input-output) 4000 VACrms

Product Description

The zero switching relay for PCB mounting is used for a wide range of applications with either resistive or inductive loads.

The zero switching relay switches on when the AC sine curve just crosses the zero value, and the relay switches

off when the current crosses zero.

The instant-on switching relay switches on immediately when the control voltage is applied. The relay switches off when the current crosses the zero value.

Ordering Key

RP 130 240-4-0

Solid State Relay (PCB)

Switching mode

Rated operational voltage

Rated operational current

Control voltage

Type Selection

Switching mode	Rated operational voltage	Rated operational current	Control voltage
130: Zero switching 132: Instant-on switching	240: 230 VACrms 440: 400 VACrms	2: 2 AACrms 4: 4 AACrms	0: 3 to 32 VDC

Selection Guide

Rated operational voltage	Control voltage	Rated operational current	
		2 AACrms	4 AACrms
230 VACrms	3 to 32 VDC	RP 130 240-2-0* RP 132 240-2-0**	RP 130 240-4-0* RP 132 240-4-0**
400 VACrms	3 to 32 VDC	RP 130 440-2-0* RP 132 440-2-0**	RP 130 440-4-0* RP 132 440-4-0**

* Zero switching

** Instant-on switching

General Specifications

	RP 13. 240-.-0	RP 13. 440-.-0
Operational voltage range	24 to 280 VACrms	48 to 480 VACrms
Non-rep. peak voltage	$\geq 650 V_p$	$\geq 850 V_p$
Zero voltage turn-on	$\leq 20 V$	$\leq 40 V$
Operational frequency range	45 to 65 Hz	45 to 65 Hz
Power factor	$\geq 0.5 @ 230 VACrms$	$\geq 0.5 @ 400 VACrms$
Approvals	UL, CSA, VDE	UL, CSA, VDE
CE-marking	Yes	Yes

Input Specifications

	RP 130 .40-.-0	RP 132 .40-.-0
Control voltage range	3 to 32 VDC	3 to 32 VDC
Pick-up voltage	≤ 3 VDC	≤ 3 VDC
Drop-out voltage	≥ 1 VDC	≥ 1 VDC
Reverse voltage	≤ 6 VDC	≤ 6 VDC
Response time pick-up	$\leq 1/2$ cycle	≤ 1 ms
Response time drop-out	$\leq 1/2$ cycle	$\leq 1/2$ cycle
Input impedance	1.5 k Ω	1.5 k Ω

Output Specifications

	RP 13. .40-2-0	RP 13. .40-4-0
Rated operational current AC 1 AC 3	2 Arms 2 Arms	4 Arms 3 Arms
Minimum operational current	20 mArms	20 mArms
Rep. overload current $t=1$ s	$\leq 6 A_p$	$\leq 12 A_p$
Non-rep. surge current $t=20$ ms	42 A_p	90 A_p
Off-state leakage current @ rated voltage and frequency	≤ 5 mArms	≤ 5 mArms
I^2t for fusing $t=1-10$ ms	$\leq 9 A^2s$	$\leq 40 A^2s$
Critical dI/dt	$\geq 10 A/\mu s$	$\geq 10 A/\mu s$
On-state voltage drop @ rated current	$\leq 1.6 V_{rms}$	$\leq 1.6 V_{rms}$
Critical dV/dt commutating	$\geq 4 V/\mu s$	$\geq 4 V/\mu s$
Critical dV/dt off-state	$\geq 100 V/\mu s$	$\geq 100 V/\mu s$

Thermal Specifications

	RP 13. .40-2-0	RP 13. .40-4-0
Operating temperature	-20° to +70°C (-4° to +158°F)	-20° to +70°C (-4° to +158°F)
Storage temperature	-40° to +100°C (-40° to +212°F)	-40° to +100°C (-40° to +212°F)
Junction temperature	$\leq 125^\circ C$ ($\leq 257^\circ F$)	$\leq 125^\circ C$ ($\leq 257^\circ F$)
R_{th} junction to case	$\leq 20.5 K/W$	$\leq 15.6 K/W$
R_{th} junction to ambient	$\leq 37.5 K/W$	$\leq 22.5 K/W$

Insulation Input-Output

Rated insulation voltage	$\geq 4000 VAC_{rms}$
Insulation resistance	$\geq 10^{10} \Omega$
Insulation capacitance	$\leq 8 pF$
Reference voltage according to VDE 01 10 B Insulation group C	500 VAC _{rms} , 600 VDC

Housing Specifications

Weight	Approx. 10 g
Housing material	Noryl GFN 1, black
Terminals	Copper, tin-plated
Potting compound	Flame retardant polyurethane

Applications


These relays can be used to switch heaters, motors, lights, valves or solenoids. When used at full load current, the relays must be placed

vertically. If more than one relay is mounted, please allow a minimum distance of 20 mm in between for sufficient air cooling.


Accessories

Fuses and varistors:
For further information refer to "General Accessories".

Wiring Diagram

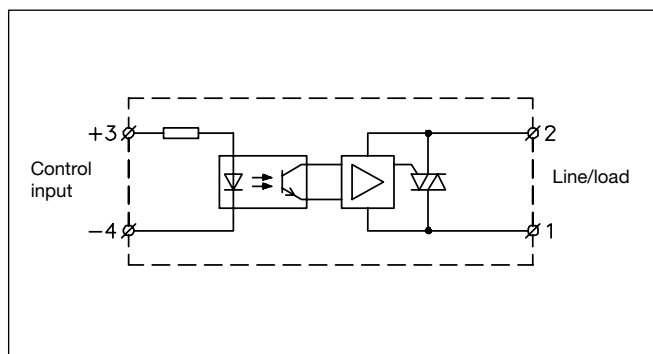


Derating Curve

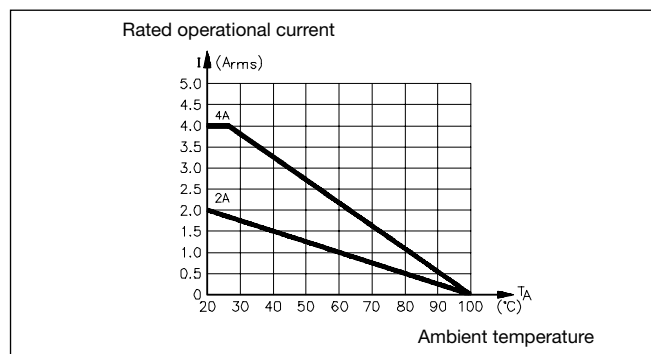


Functional Diagrams

RP 130 .40-.-0

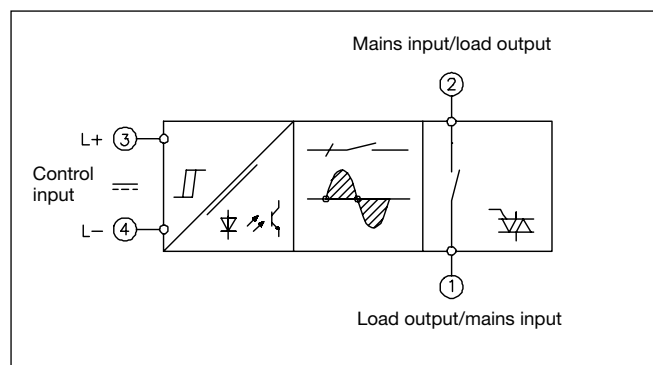

RP 132 .40-.-0

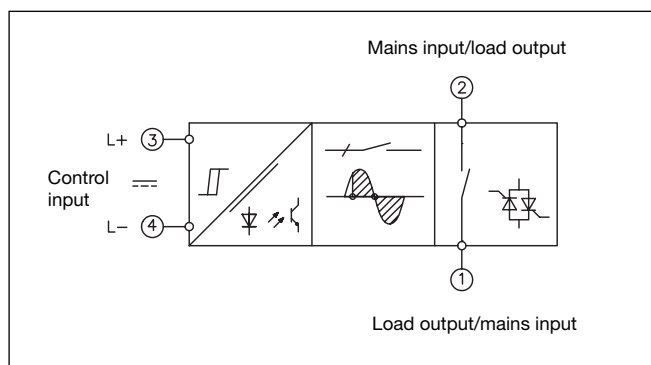

Dimensions

