

Features

- Voltage noise of only $4.9\text{nV}/\sqrt{\text{Hz}}$
- Current noise of only $1.2\text{pA}/\sqrt{\text{Hz}}$
- Bandwidth (-3dB) of 80MHz
@ $A_V = +1$
- Gain-of-1 stable
- Just 4.5mA per amplifier
- 8-pin MSOP package
- $\pm 2.5\text{V}$ to $\pm 12\text{V}$ operation

Applications

- ADSL Filters
- HDSLII Filters
- Ultrasound input amplifiers
- Wideband Instrumentation
- Communications equipment
- Wideband sensors

Ordering Information

| Part No. | Temp. Range | Package | Outline # |
|--------------|-------------|---------|-----------|
| EL2228CY | 8-Pin MSOP | - | MDP0043 |
| EL2228CY-T13 | 8-Pin MSOP | 13" | MDP0043 |
| EL2228CY-T7 | 8-Pin MSOP | 7" | MDP0043 |
| EL2228CS | 8-Pin SO | - | MDP0027 |
| EL2228CS-T13 | 8-Pin SO | 13" | MDP0027 |
| EL2228CS-T7 | 8-Pin SO | 7" | MDP0027 |


General Description

The EL2228C is a dual, low-noise amplifier, ideally suited to filtering applications in ADSL and HDSLII designs. It feature low noise specification of just $4.9\text{nV}/\sqrt{\text{Hz}}$ and $1.2\text{pA}/\sqrt{\text{Hz}}$, making it ideal for processing low voltage waveforms.

The EL2228C has a -3dB bandwidth of 80MHz and is gain-of-1 stable. It also affords minimal power dissipation with a supply current of just 4.5mA per amplifier. The amplifier can be powered from supplies ranging from $\pm 2.5\text{V}$ to $\pm 12\text{V}$.

The EL2228C is available in a space saving 8-Pin MSOP package as well as the industry standard 8-Pin SO. It can operate over the -40°C to $+85^\circ\text{C}$ temperature range.

Connection Diagram

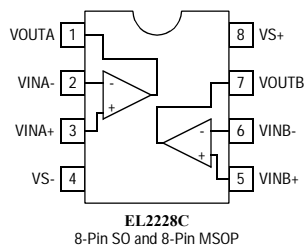

EL2228C - Preliminary

Dual Low Noise Amplifier

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)

Values beyond absolute maximum ratings can cause the device to be prematurely damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

| | |
|--|---|
| Supply Voltage between V_{S+} and V_{S-} | +28V |
| Input Voltage | $V_{S-} - 0.3\text{V}$, $V_{S+} + 0.3\text{V}$ |
| Maximum Continuous Output Current | 40mA |

| | |
|-------------------------|-----------------|
| Maximum Die Temperature | +125°C |
| Storage Temperature | -65°C to +150°C |
| Operating Temperature | -40°C to +85°C |
| Lead Temperature | 260°C |
| Power Dissipation | See Curves |
| ESD Voltage | 2kV |

Important Note:

All parameters having Min/Max specifications are guaranteed. Typ values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore: $T_J = T_C = T_A$

Electrical Characteristics

$V_{S+} = +12\text{V}$, $V_{S-} = -12\text{V}$, $R_L = 500\Omega$ and $C_L = 3\text{pF}$ to 0V, $R_F = 420\Omega$ & $T_A = 25^\circ\text{C}$ unless otherwise specified.

| Parameter | Description | Condition | Min | Typ | Max | Unit |
|---------------------------------|----------------------------------|--|-------|-------|-------|------------------------------|
| Input Characteristics | | | | | | |
| V_{OS} | Input Offset Voltage | $V_{CM} = 0\text{V}$ | | 0.2 | 3 | mV |
| TCV_{OS} | Average Offset Voltage Drift | [1] | | -4 | | $\mu\text{V}/^\circ\text{C}$ |
| I_B | Input Bias Current | $V_{CM} = 0\text{V}$ | -9 | -4.5 | -1 | μA |
| R_{IN} | Input Impedance | | | 8 | | M Ω |
| C_{IN} | Input Capacitance | | | 1 | | pF |
| $CMIR$ | Common-Mode Input Range | | -11.8 | | +10.4 | V |
| $CMRR$ | Common-Mode Rejection Ratio | for V_{IN} from -11.8V to +10.4V | 60 | 90 | | dB |
| | | for V_{IN} from -10V to +10V | 60 | 75 | | dB |
| A_{VOL} | Open-Loop Gain | $-5\text{V} \leq V_{OUT} \leq 5\text{V}$ | 60 | 75 | | dB |
| e_n | Voltage Noise | $f = 100\text{kHz}$ | | 4.9 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| i_n | Current Noise | $f = 100\text{kHz}$ | | 1.2 | | $\text{pA}/\sqrt{\text{Hz}}$ |
| Output Characteristics | | | | | | |
| V_{OL} | Output Swing Low | $R_L = 500\Omega$ | | -10.3 | -10 | V |
| | | $R_L = 250\Omega$ | | -9.5 | -9 | V |
| V_{OH} | Output Swing High | $R_L = 500\Omega$ | 10 | 10.3 | | V |
| | | $R_L = 250\Omega$ | 9.5 | 10 | | V |
| I_{SC} | Short Circuit Current | $R_L = 10\Omega$ | 140 | 180 | | mA |
| Power Supply Performance | | | | | | |
| $PSRR$ | Power Supply Rejection Ratio | V_S is moved from $\pm 10.8\text{V}$ to $\pm 13.2\text{V}$ | 65 | 83 | | dB |
| I_S | Supply Current (Per Amplifier) | No load | 4 | 5 | 6 | mA |
| Dynamic Performance | | | | | | |
| SR | Slew Rate [2] | $\pm 2.5\text{V}$ square wave, measured 25%-75% | 44 | 65 | | $\text{V}/\mu\text{s}$ |
| t_s | Settling to +0.1% ($A_V = +1$) | ($A_V = +1$), $V_O = 2\text{V}$ step | | 50 | | ns |
| BW | -3dB Bandwidth | | | 80 | | MHz |
| $HD2$ | 2nd Harmonic Distortion | $f = 1\text{MHz}$, $V_O = 2V_{P-P}$, $R_L = 500\Omega$, $A_V = 2$ | | -86 | | dBc |
| | | $f = 1\text{MHz}$, $V_O = 2V_{P-P}$, $R_L = 150\Omega$, $A_V = 2$ | | -79 | | dBc |
| $HD3$ | 3rd Harmonic Distortion | $f = 1\text{MHz}$, $V_O = 2V_{P-P}$, $R_L = 500\Omega$, $A_V = 2$ | | -93 | | dBc |
| | | $f = 1\text{MHz}$, $V_O = 2V_{P-P}$, $R_L = 150\Omega$, $A_V = 2$ | | -70 | | dBc |

1. Measured over operating temperature range
2. Slew rate is measured on rising and falling edges

EL2228C - Preliminary

Dual Low Noise Amplifier

EL2228C - Preliminary

Electrical Characteristics

$V_S = +5V$, $V_S = -5V$, $R_L = 500\Omega$ and $C_L = 3pF$ to $0V$, $R_F = 420\Omega$ & $T_A = 25^\circ C$ unless otherwise specified.

| Parameter | Description | Condition | Min | Typ | Max | Unit |
|---------------------------------|----------------------------------|---|------|------|------|------------------|
| Input Characteristics | | | | | | |
| V_{OS} | Input Offset Voltage | $V_{CM} = 0V$ | | 0.6 | 3 | mV |
| TCV_{OS} | Average Offset Voltage Drift | [1] | | 4.9 | | $\mu V/^\circ C$ |
| I_B | Input Bias Current | $V_{CM} = 0V$ | -9 | -4.5 | -1 | μA |
| R_{IN} | Input Impedance | | | 6 | | $M\Omega$ |
| C_{IN} | Input Capacitance | | | 1.2 | | pF |
| CMIR | Common-Mode Input Range | | -4.7 | | +3.4 | V |
| CMRR | Common-Mode Rejection Ratio | for V_{IN} from -4.7V to +3.4V | 60 | 90 | | dB |
| | | for V_{IN} from -2V to +2V | | | | dB |
| A_{VOL} | Open-Loop Gain | $-2.5V \leq V_{OUT} \leq 2.5V$ | 60 | 72 | | dB |
| e_n | Voltage Noise | $f = 100kHz$ | | 4.7 | | nV/\sqrt{Hz} |
| i_n | Current Noise | $f = 100kHz$ | | 1.2 | | pA/\sqrt{Hz} |
| Output Characteristics | | | | | | |
| V_{OL} | Output Swing Low | $R_L = 500\Omega$ | | -3.8 | -3.5 | V |
| | | $R_L = 250\Omega$ | | -3.7 | -3.5 | V |
| V_{OH} | Output Swing High | $R_L = 500\Omega$ | 3.5 | 3.7 | | V |
| | | $R_L = 250\Omega$ | 3.5 | 3.6 | | V |
| I_{SC} | Short Circuit Current | $R_L = 10\Omega$ | 60 | 100 | | mA |
| Power Supply Performance | | | | | | |
| PSRR | Power Supply Rejection Ratio | V_S is moved from $\pm 4.5V$ to $\pm 5.5V$ | 65 | 83 | | dB |
| I_S | Supply Current (Per Amplifier) | No load | 3.5 | 4.5 | 5.5 | mA |
| Dynamic Performance | | | | | | |
| SR | Slew Rate [2] | $\pm 2.5V$ square wave, measured 25%-75% | 35 | 50 | | $V/\mu s$ |
| t_s | Settling to +0.1% ($A_V = +1$) | ($A_V = +1$), $V_O = 2V$ step | | 50 | | ns |
| BW | -3dB Bandwidth | | | 75 | | MHz |
| HD2 | 2nd Harmonic Distortion | $f = 1MHz$, $V_O = 2V_{P-P}$, $R_L = 500\Omega$, $A_V = 2$ | | -90 | | dBc |
| | | $f = 1MHz$, $V_O = 2V_{P-P}$, $R_L = 150\Omega$, $A_V = 2$ | | -71 | | dBc |
| HD3 | 3rd Harmonic Distortion | $f = 1MHz$, $V_O = 2V_{P-P}$, $R_L = 500\Omega$, $A_V = 2$ | | -99 | | dBc |
| | | $f = 1MHz$, $V_O = 2V_{P-P}$, $R_L = 150\Omega$, $A_V = 2$ | | -69 | | dBc |


1. Measured over operating temperature range
2. Slew rate is measured on rising and falling edges

EL2228C - Preliminary


Dual Low Noise Amplifier

Typical Performance Curves


Non-inverting Frequency Response for Various R_F

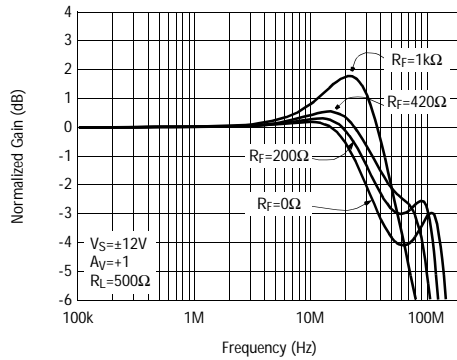


Inverting Frequency Response for Various R_F

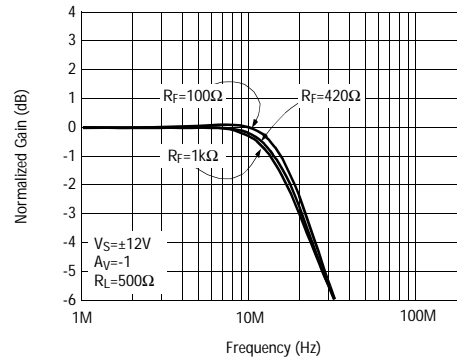


Non-inverting Frequency Response (Gain)

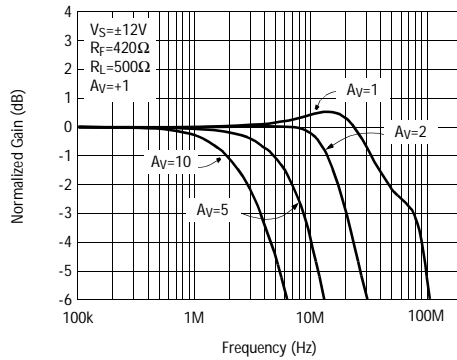


Inverting Frequency Response (Gain)

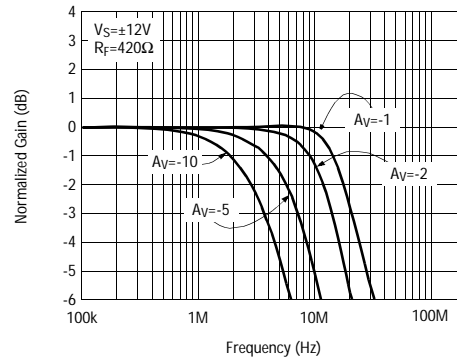

Non-inverting Frequency Response (Phase)

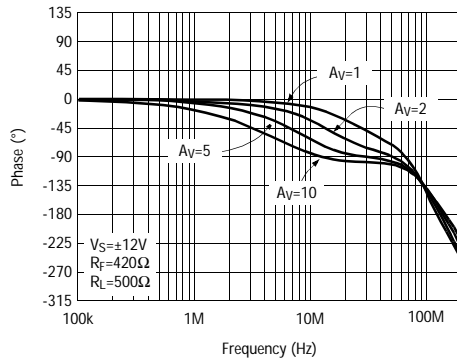

Inverting Frequency Response (Phase)






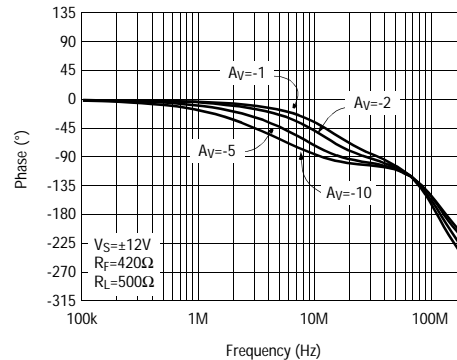


EL2228C - Preliminary

Dual Low Noise Amplifier

EL2228C - Preliminary







Typical Performance Curves

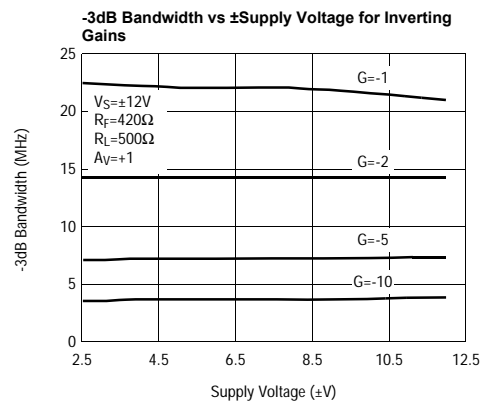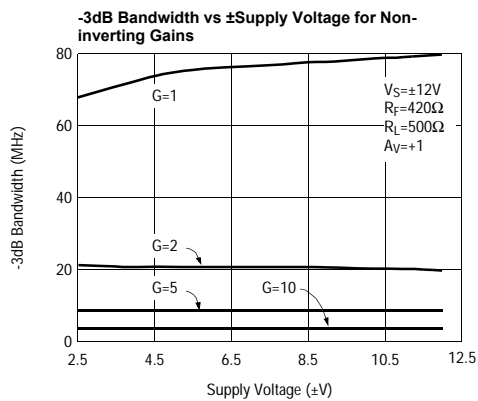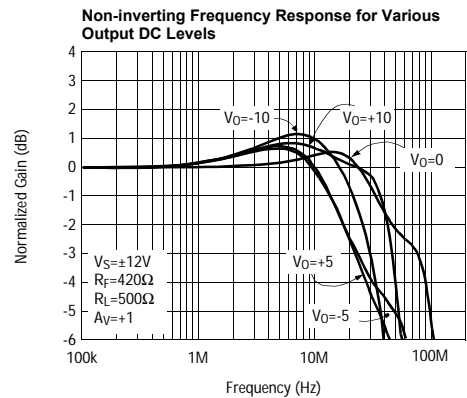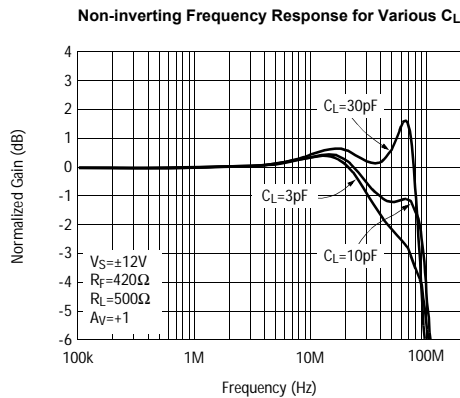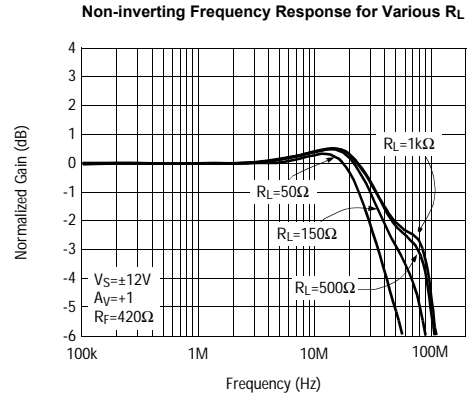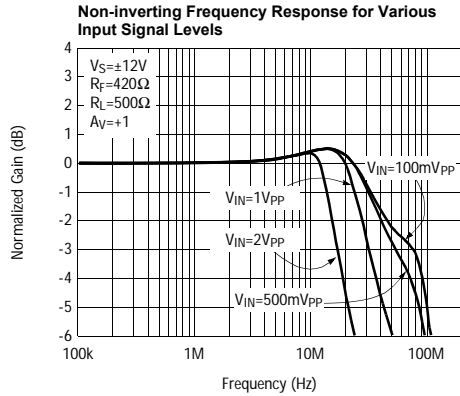

EL2228C - Preliminary

Dual Low Noise Amplifier

Typical Performance Curves

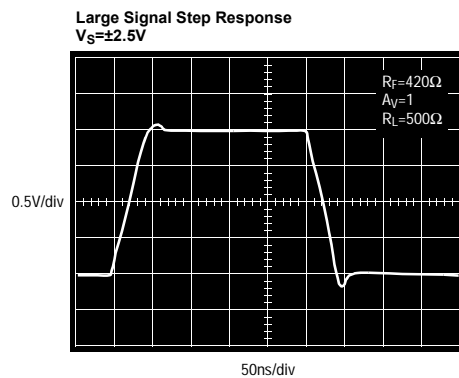
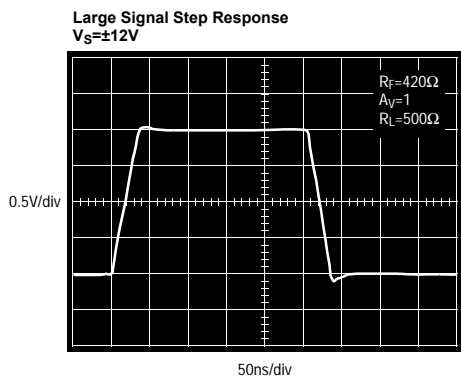
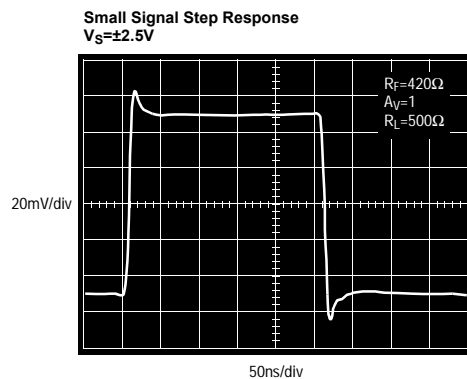
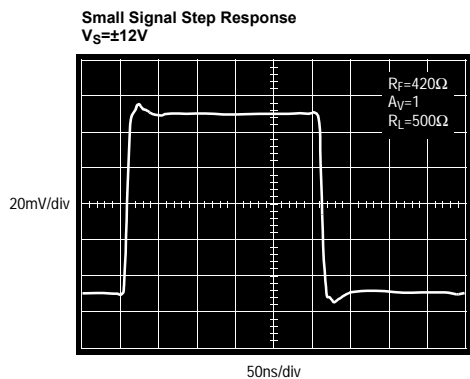
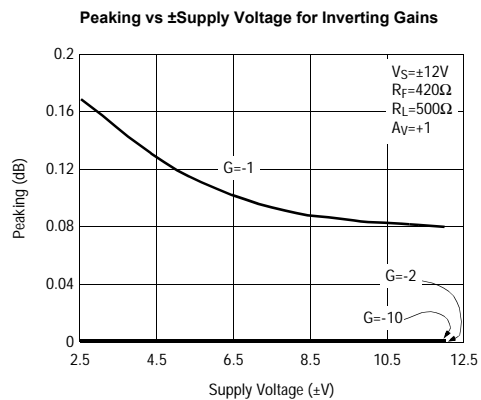
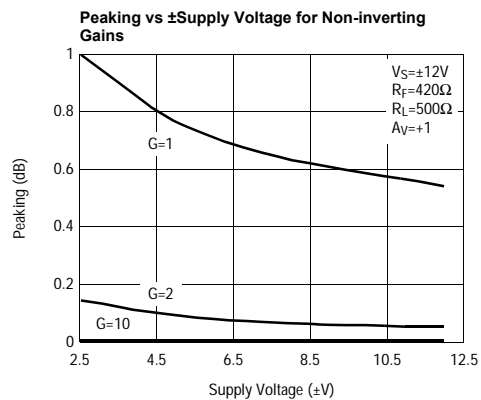


EL2228C - Preliminary

Dual Low Noise Amplifier

EL2228C - Preliminary







Typical Performance Curves

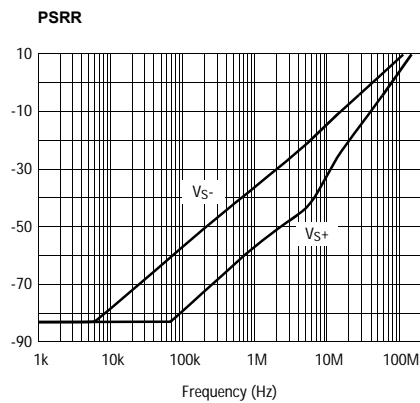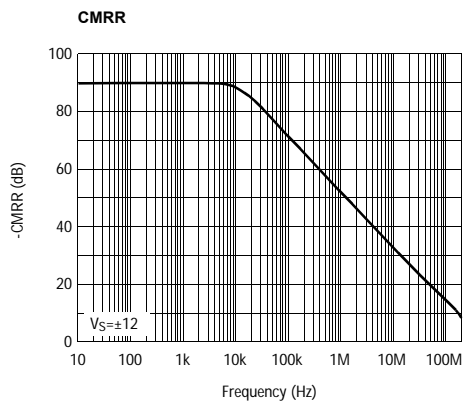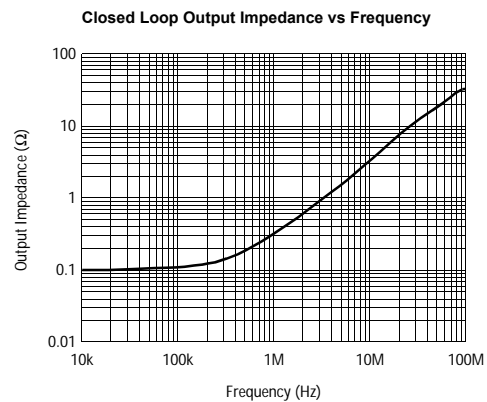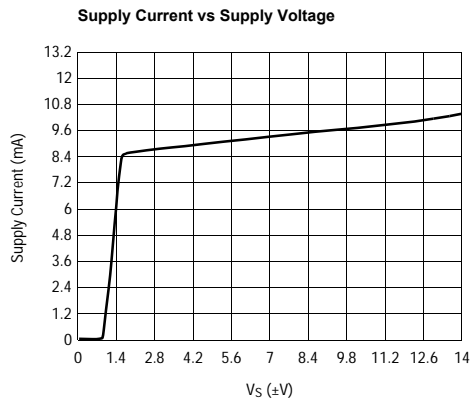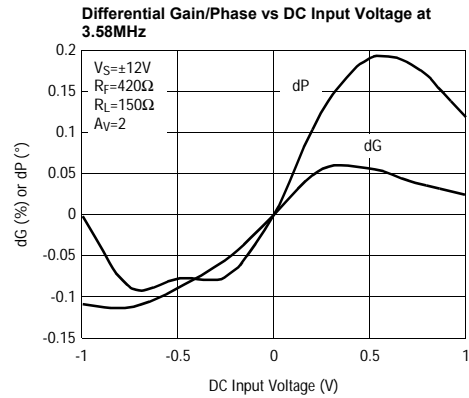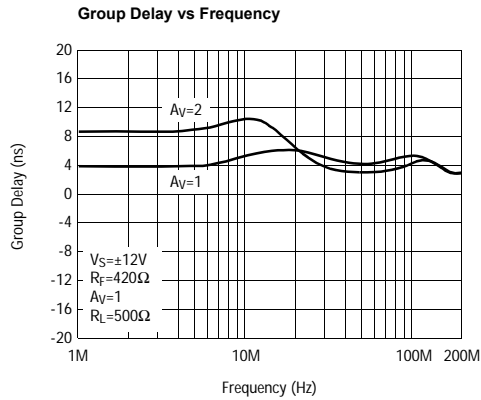

EL2228C - Preliminary

Dual Low Noise Amplifier

Typical Performance Curves

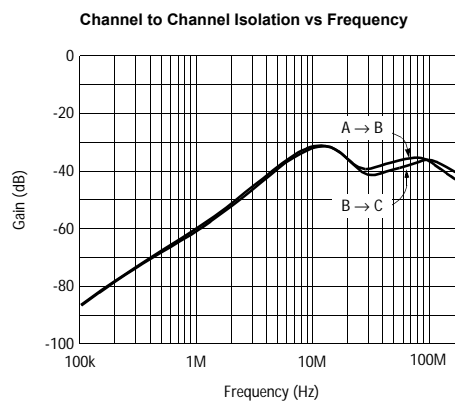
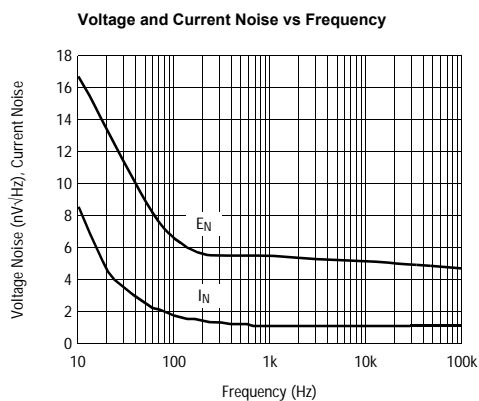
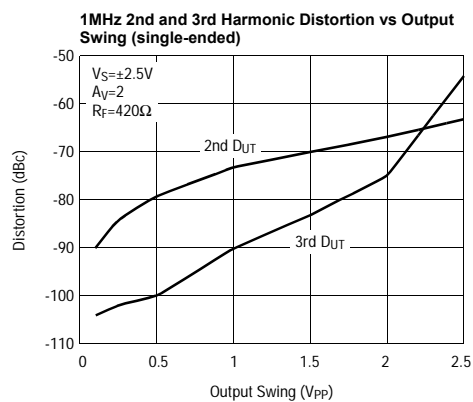
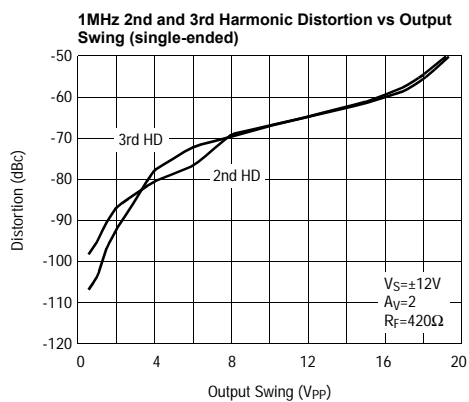
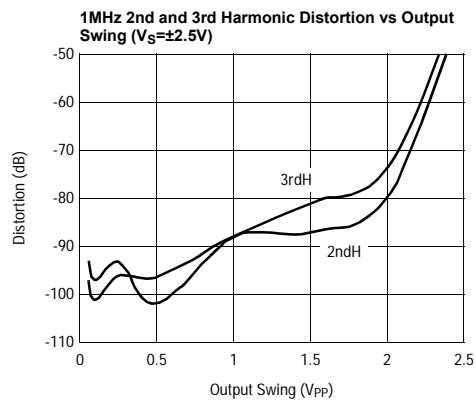
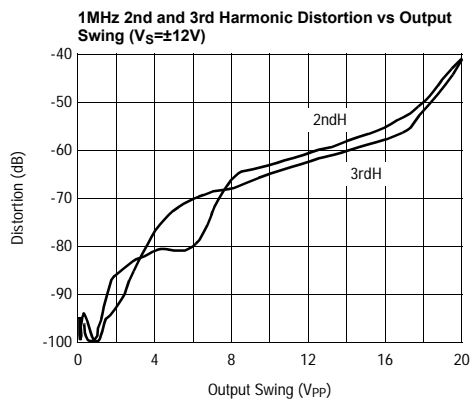


EL2228C - Preliminary

Dual Low Noise Amplifier

EL2228C - Preliminary

Typical Performance Curves

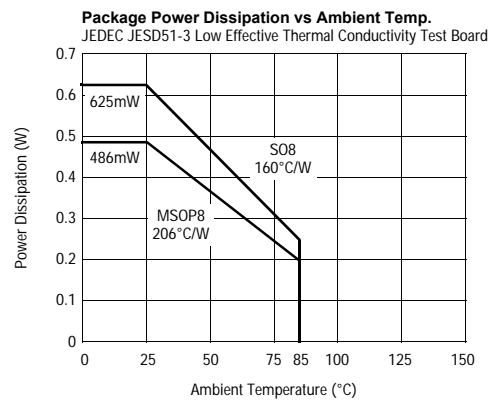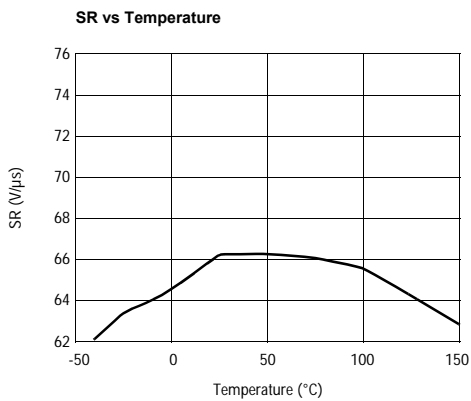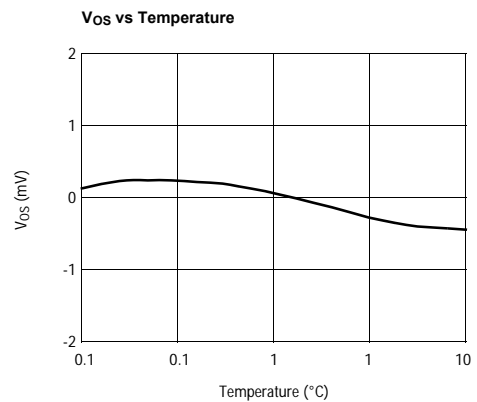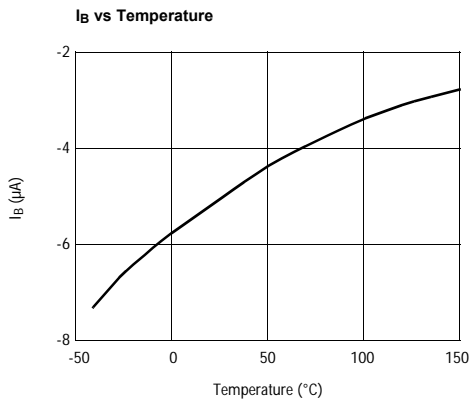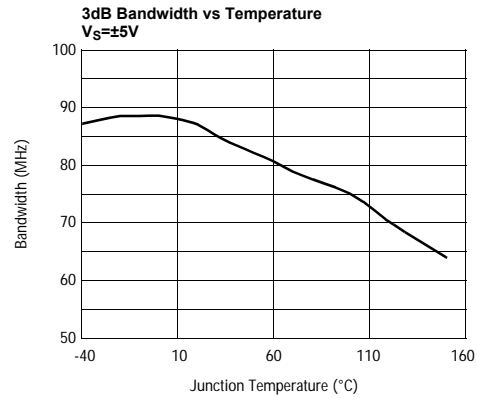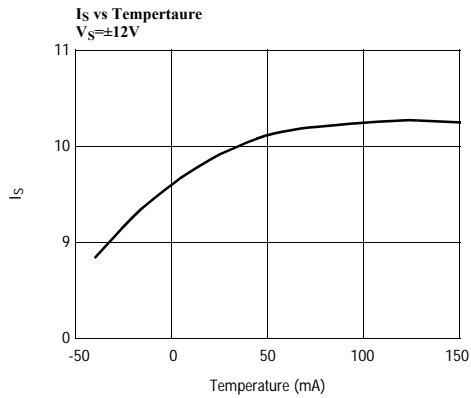

[illegible]

EL2228C - Preliminary
Dual Low Noise Amplifier

EL2228C - Preliminary

Applications Information

Product Description

EL2228C - Preliminary

Dual Low Noise Amplifier

General Disclaimer

Specifications contained in this data sheet are in effect as of the publication date shown. Elantec, Inc. reserves the right to make changes in the circuitry or specifications contained herein at any time without notice. Elantec, Inc. assumes no responsibility for the use of any circuits described herein and makes no representations that they are free from patent infringement.

élantec

HIGH PERFORMANCE ANALOG INTEGRATED CIRCUITS

Elantec Semiconductor, Inc.

675 Trade Zone Blvd.

Milpitas, CA 95035

Telephone: (408) 945-1323

(888) ELANTEC

Fax: (408) 945-9305

European Office: +44-118-977-6020

Japan Technical Center: +81-45-682-5820

WARNING - Life Support Policy

Elantec, Inc. products are not authorized for and should not be used within Life Support Systems without the specific written consent of Elantec, Inc. Life Support systems are equipment intended to support or sustain life and whose failure to perform when properly used in accordance with instructions provided can be reasonably expected to result in significant personal injury or death. Users contemplating application of Elantec, Inc. Products in Life Support Systems are requested to contact Elantec, Inc. factory headquarters to establish suitable terms & conditions for these applications. Elantec, Inc.'s warranty is limited to replacement of defective components and does not cover injury to persons or property or other consequential damages.