

2SC3242, 2SC3242A

FOR LOW FREQUENCY POWER AMPLIFY APPLICATION
SILICON NPN EPITAXIAL TYPE

DESCRIPTION

2SC3242, 2SC3242A is a silicon NPN epitaxial type transistor designed for small type motor drive, solenoid drive and power supply application.

Complementary with 2SA1282, 2SA1282A.

FEATURE


- High collector current $I_C=2A$
- Low $V_{CE(sat)}$
 $V_{CE(sat)}=0.17V$ typ (@ $I_C=1A$)
- High h_{FE} $h_{FE}=150$ to 800
- High collector dissipation $P_C=900mW$

APPLICATION

Small type motor drive, power supply for VCR, deck, player.

OUTLINE DRAWING

Unit:mm

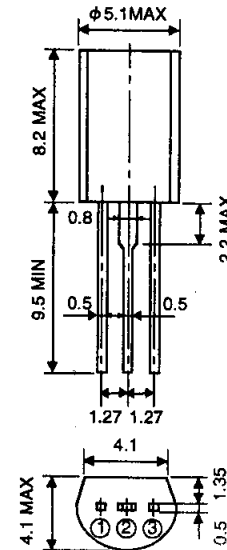

TERMINAL CONNECTOR

- ① : EMITTER
② : COLLECTOR
③ : BASE
- EIAJ : —
JEDEC : —

Note)

The dimension without tolerance represent central value.

MAXIMUM RATINGS (Ta=25°C)

Symbol	Parameter	Ratings		Unit
		2SC3242	2SC3242A	
V_{CBO}	Collector to Base voltage	20	20	V
V_{EBO}	Emitter to Base voltage	6	6	V
V_{CEO}	Collector to Emitter voltage	16	20	V
I_{CM}	Peak Collector current	3		A
I_C	Collector current	2		A
P_C	Collector dissipation (Ta=25°C)	900		mW
T_J	Junction temperature	+150		°C
T_{stg}	Storage temperature	-55 to +150		°C

ELECTRICAL CHARACTERISTICS (Ta=25°C)


Symbol	Parameter	Test conditions	Limits						Unit
			2SC3242			2SC3242A			
			Min	Typ	Max	Min	Typ	Max	
V(BR)CBO	C to B break down voltage	Ic=10 μA, Ie=0	20			20			V
V(BR)EBO	E to B break down voltage	Ie=10 μA, Ic=0	6			6			V
V(BR)CEO	C to E break down voltage	Ic=2mA, Rbe=∞	16			20			V
ICBO	Collector cut off current	VCB=16V, Ie=0			0.2			0.2	μA
IEBO	Emitter cut off current	VEB=4V, Ic=0			0.2			0.2	μA
hFE	DC forward current gain	VCE=4V, Ic=100mA	150		800	150		500	—
VCE(sat)	C to E saturation voltage	Ic=1A, Ib=50mA		0.17	0.3		0.17	0.3	V
fT	Gain band width product	VCE=2V, Ie=-10mA		80			80		MHz
Cob	Collector output capacitance	VCB=10V, Ie=0, f=1MHz		28			28		pF

* : It shows h_{FE} classification in right table


Item	E	F	G
h_{FE}	150 to 300	250 to 500	400 to 800

TYPICAL CHARACTERISTICS


**COLLECTOR DISSIPATION VS.
AMBIENT TEMPERATURE**

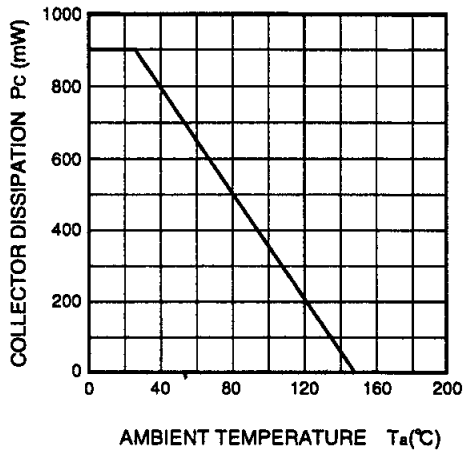


COMMON EMITTER OUTPUT

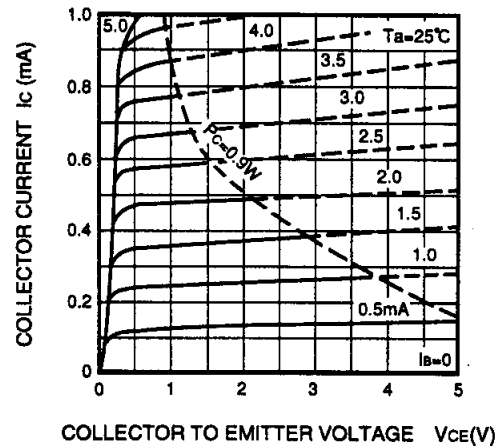


COMMON EMITTER TRANSFER

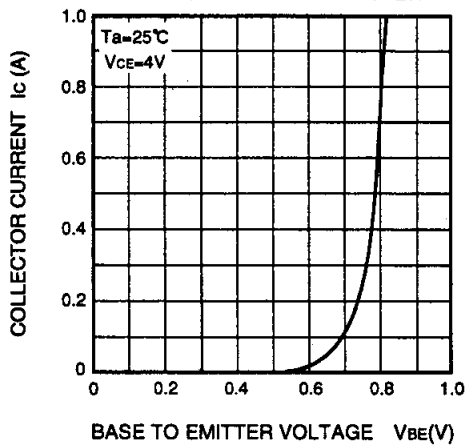


**DC FORWARD CURRENT GAIN
VS. COLLECTOR CURRENT**

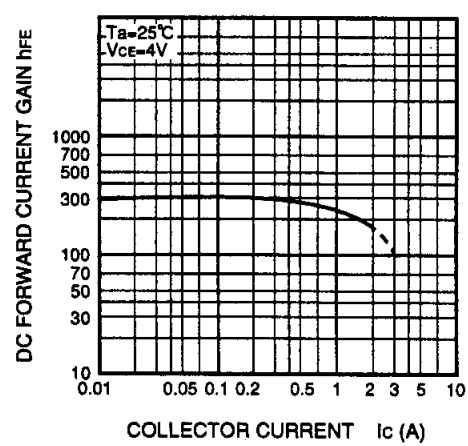

**COLLECTOR TO EMITTER SATURATION
VOLTAGE VS. BASE CURRENT**

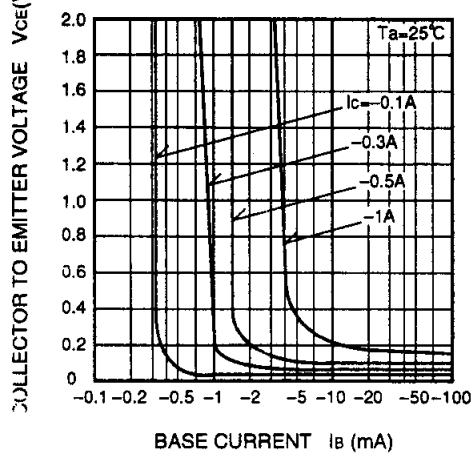


**GAIN BAND WIDTH PRODUCT
VS. EMITTER CURRENT**

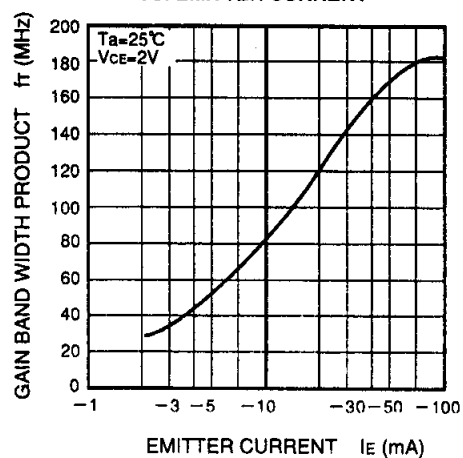

〈SMALL-SIGNAL TRANSISTOR〉

2SC3242, 2SC3242A

FOR LOW FREQUENCY POWER AMPLIFY APPLICATION
SILICON NPN EPITAXIAL TYPE

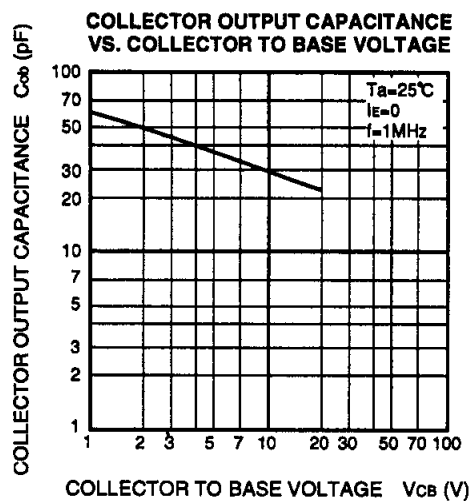



<http://www.idc-com.co.jp>
6-41, TSUKUBA, ISAHAYA, NAGASAKI, 854-0065, JAPAN

Keep safety in your circuit designs !

Isahaya Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

• These materials are intended as reference to assist out customers in the selection of the Isahaya semiconductor product best suited to the customer's application, they do not convey any license under any intellectual property rights, or any other rights, belonging to Isahaya Electronics Corporation or a third party.
• Isahaya Electronics Corporation assumes no responsibility for any damage, or infringement of any third-party rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in the materials.
• All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by Isahaya Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Isahaya Electronics Corporation or authorized Isahaya Semiconductor product distributor for the latest product information before purchasing a product listed herein.
• The prior written approval of Isahaya Electronics Corporation is necessary to reprint or reproduce in whole or in part these materials.
• If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
• Please contact Isahaya Electronics Corporation or an authorized Isahaya Semiconductor product distributor for further details on these materials or the products contained therein.
