


# STK3082III



4053A

Thick Film Hybrid IC

## 2-Channel Voltage Amplifier for 80 to 90W AF Power Amplifier (Dual Supplies)

©1534A

### Features

- . The AC amp circuit configuration eliminates the need to use an external midpoint adjust circuit.
- . External parts provide more flexibility in phase compensation.
- . Low distortion (0.005%) due to built-in current mirror circuit.

### Maximum Ratings at Ta=25°C

			unit
Maximum Supply Voltage	$V_{CCmax}$	$\pm 65$	V
Operating Case Temperature	$T_C$	115	°C
Storage Temperature	$T_{stg}$	-30 to +115	°C


### Operating Characteristics at Ta=25°C, VG=40dB, Seq Test Circuit.

			min	typ	max	unit
Current Dissipation	$I_{CC}$	$V_{CC}=\pm 56V$		20	30	mA
Midpoint Voltage	$V_N$	$V_{CC}=\pm 56V$	-50		+50	mV
Output Noise Voltage	$V_{NO}$	$V_{CC}=\pm 56V, R_g=10k\Omega$			1.0	mV
Input Resistance	$r_i$	$V_{CC}=\pm 56V, f=1kHz, V_o=2.83V$		92		kohm
Total Harmonic Distortion	THD	$V_{CC}=\pm 47V, f=20kHz, V_o=25.3V$			0.005	%

### Remarks


- . When testing, use a regulated power supply unless otherwise specified.

### Case Outline 4053A (unit:mm)

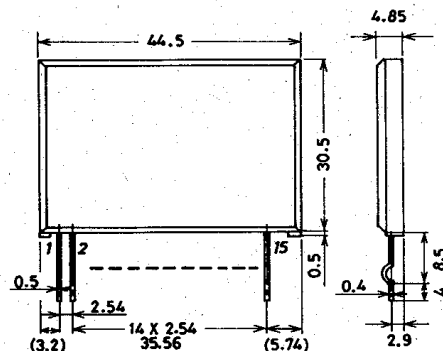

# STK3082III

## Equivalent Circuit

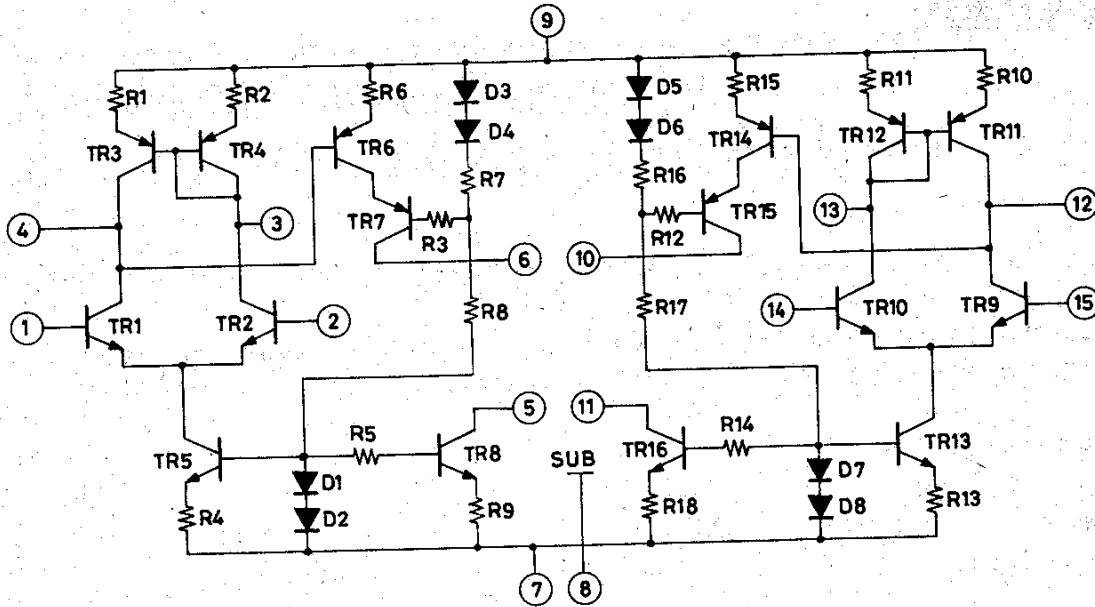

## Test Circuit

