

CA311, LM311*

Voltage Comparator

For Commercial and Industrial Applications

Features:

- Single- or dual-supply operation
- Power consumption - 135 mW at ± 15 V
- Strobe capability
- Low input-offset current - 6 nA (typ.)
- Differential input-voltage range - ± 30 V
- Directly interchangeable with National Semiconductor LM311 Series

The RCA CA311 is a monolithic voltage comparator that operates from dual supplies up to ± 15 V, or from single supplies down to 5 V. This single supply capability makes the outputs of these devices compatible with RTL, DTL, TTL, and MOS circuits. In addition they can drive lamps or relays, and switch voltages up to 40 V at currents as high as 50 mA.

The inputs and outputs of the CA311 can be isolated from system ground, allowing the output to drive loads referred to ground V^+ , or V^- .

Applications:

- Multivibrators
- Positive and negative peak detectors
- Crystal oscillators
- Zero-crossing detectors
- Solenoid, relay, and lamp drivers

The CA311 is available in 8-lead TO-5 style packages with standard leads (T suffix), dual-in-line formed leads ("DIL-CAN", S suffix), 8-lead dual-in-line plastic package ("MINI-DIP", E suffix), and in chip form (H suffix).

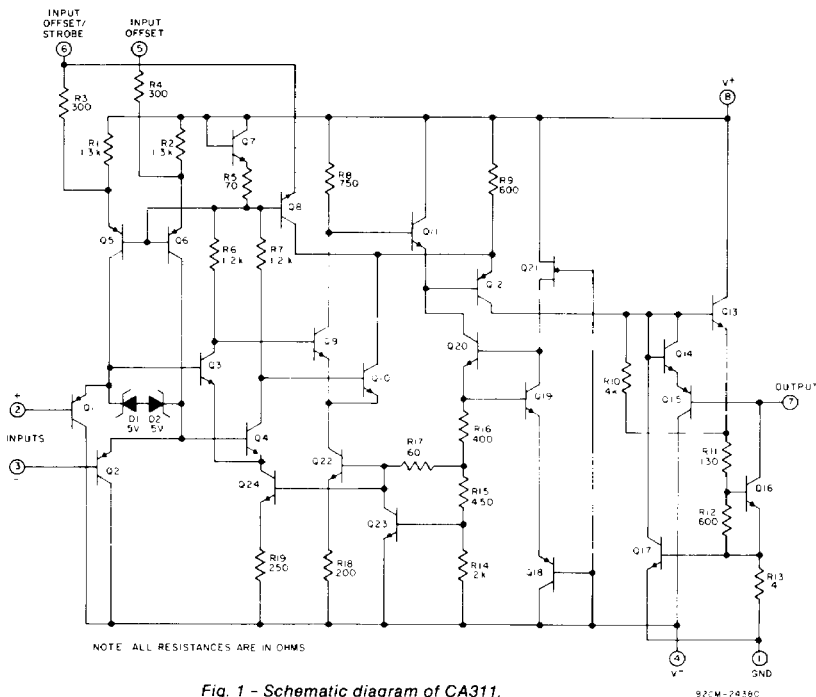


Fig. 1 - Schematic diagram of CA311.


*Technical Data on LM Branded types is identical to the corresponding CA Branded types.

Maximum Ratings, Absolute Maximum Values at $T_A = 25^\circ\text{C}$:


DC SUPPLY VOLTAGE (between V^+ and V^- terminals)	36 V
DC INPUT VOLTAGE*	± 15 V
DIFFERENTIAL INPUT VOLTAGE	± 30 V
OUTPUT TO NEGATIVE SUPPLY VOLTAGE (V_1 -4)	40 V
GROUND TO NEGATIVE SUPPLY VOLTAGE (V_1 -4)	30 V
OUTPUT SHORT-CIRCUIT DURATION	10 s
DEVICE DISSIPATION:	
UP TO $T_A = 25^\circ\text{C}$	500 mW
Above $T_A = 25^\circ\text{C}$	derate linearly at 6.67 mW/ $^\circ\text{C}$
AMBIENT TEMPERATURE RANGE:	
Operating	0 to $+70^\circ\text{C}$ †
Storage	-65 to $+150^\circ\text{C}$
LEAD TEMPERATURE (DURING SOLDERING):	
At distance $1/16 \pm 1/32$ inch (1.59 ± 0.79 mm) from case for 10 seconds max.	$+265^\circ\text{C}$

*This rating applies for ± 15 V supplies. The positive input-voltage limit is 30 V above the negative supply. The negative input-voltage limit is equal to the negative supply voltage or 30 V below the positive supply. The negative input-voltage limit is equal to the negative supply voltage or 30 V below the positive supply, whichever is less.

†Types CA311 E, S, and T can be operated over the temperature range of -55 to $+125^\circ\text{C}$, although the published limits for certain electrical specifications apply only over the temperature range of 0 to 70°C .

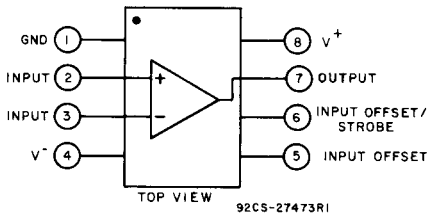

FUNCTIONAL DIAGRAM FOR PLASTIC PACKAGE.

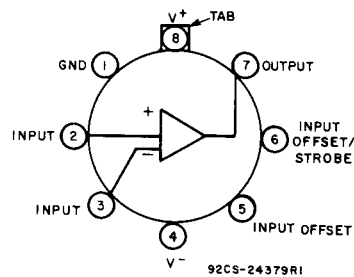

FUNCTIONAL DIAGRAM FOR TO-5 STYLE PACKAGE.

TYPICAL CHARACTERISTICS

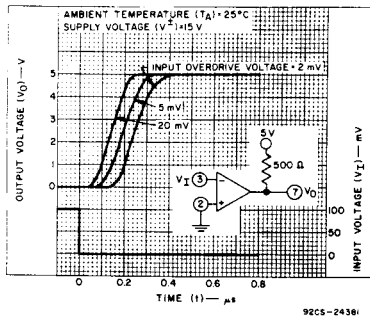


Fig. 2 - Response time for various input overdrive voltages - positive input.











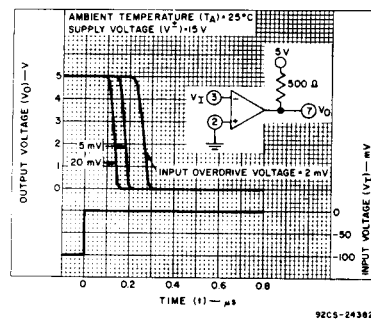


Fig. 3 - Response time for various input overdrive voltages - negative input.

CHARACTERISTICS	TEST CONDITIONS		LIMITS			UNITS	
	SUPPLY VOLTAGE (V \pm) = 15V UNLESS OTHERWISE SPECIFIED		CA311				
			MIN.	TYP.	MAX.		
Input Offset Voltage V _{IO}	R _S \leq 5 k Ω , Note 2	T _A = 25° C	—	2	7.5	mV	
		Note 1	—	—	10		
Saturation Voltage	V _I \leq -10 mV, I _O = 50 mA	T _A = 25° C	—	0.75	1.5	V	
	V ₊ \geq 4.5 V, V ₋ = 0, V _I \leq -10 mV, I _{SINK} \leq 8 mA	Note 1	—	0.23	0.4		
Input Voltage Range V _{IPP}		Note 1	—	\pm 14	—	V	
Input Offset Current I _{IO}	Note 2	T _A = 25° C	—	6	50	nA	
		Note 1	—	—	70		
Input Bias Current I _{IB}	Note 2	T _A = 25° C	—	100	250	nA	
		Note 1	—	—	300		
Positive Supply Current I ⁺		T _A = 25° C	—	5.1	7.5	mA	
Negative Supply Current I ⁻		T _A = 25° C	—	4.1	5	mA	
Output Leakage Current	V _I \geq 10 mV, V _O = 35 V	T _A = 25° C	—	—	50	nA	
Strobe on Current		T _A = 25° C	—	3	—	mA	
Voltage Gain, A		T _A = 25° C	40	200	—	V/mV	
Response Time	100 mV Input Step with 5 mV Overdrive Voltage	T _A = 25° C	—	200	—	ns	
Input Voltage Range		T _A = 25° C	-14.5	13.8- -14.7	13	V	

Note 2: The input offset characteristics given are the values required to drive the output to within 1 V of either supply with a 1 mA load. These characteristics define an error band which takes into account the worst-case effects of voltage gain and input impedance. The input offset voltage, input offset current, and input bias current specifications apply for any supply voltage from a 5 V single supply up to a ± 15 V dual supply.

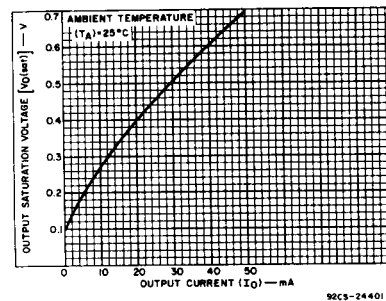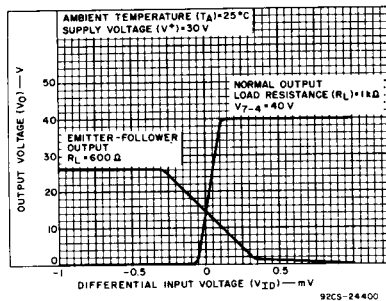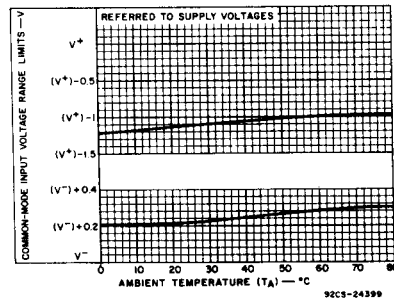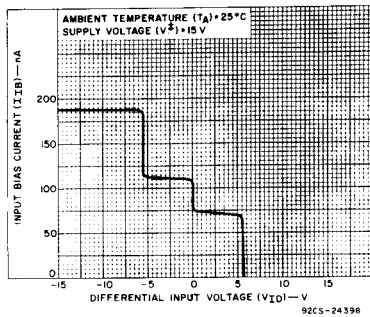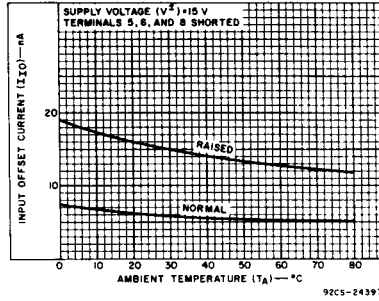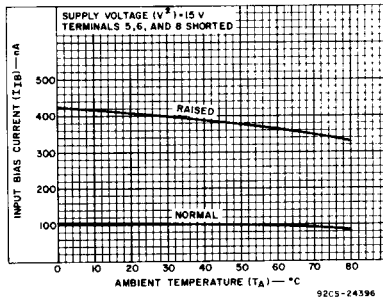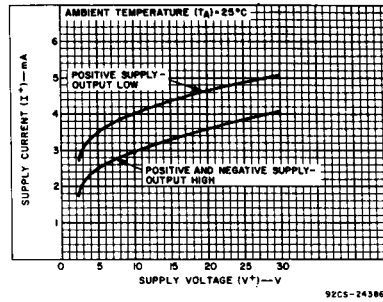

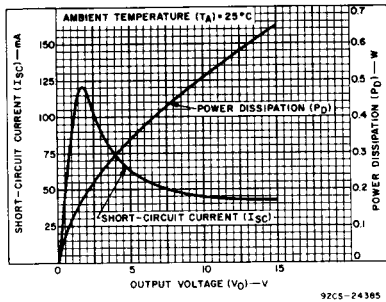

CA311, LM311

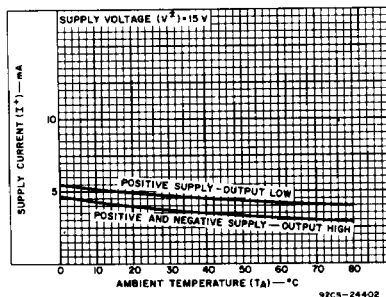


Fig. 14 - Supply current vs. ambient temperature.

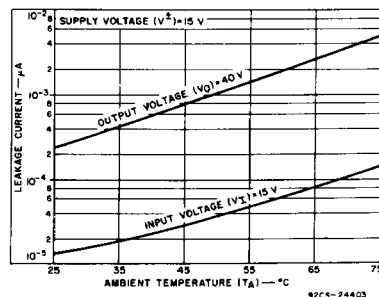


Fig. 15 - Input and output leakage current vs. ambient temperature.

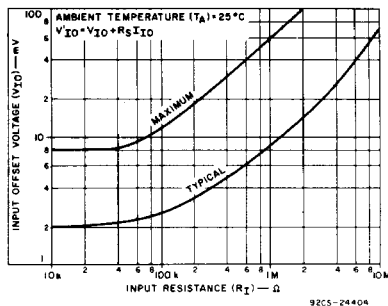


Fig. 16 - Offset error.

TYPICAL APPLICATIONS




Fig. 17 - Comparator and solenoid driver.


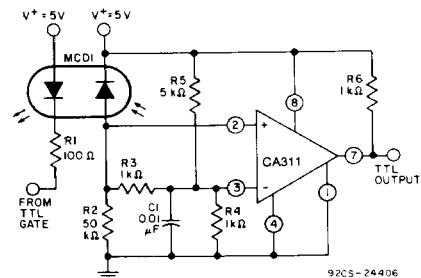


Fig. 18 - Digital transmission isolator.



* INPUT POLARITY IS REVERSED WHEN USING PIN 1 AS OUTPUT

Fig. 19 - Driving a ground-referred load.




Fig. 20 - Zero-crossing detector driving MOS logic.

TYPICAL APPLICATIONS (cont'd)

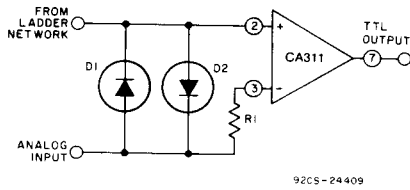


Fig. 21 - Using clamp diodes to improve response.

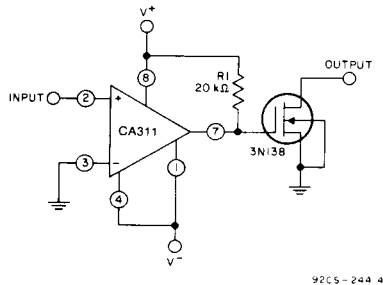


Fig. 23 - Zero-crossing detector driving a MOS switch.

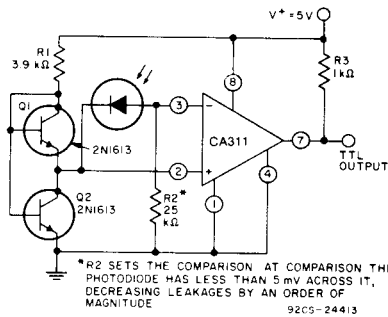


Fig. 25 - Precision photodiode comparator.

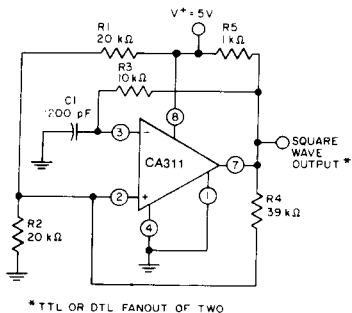


Fig. 26 - 100-kHz free-running multivibrator.




Fig. 22 - Low-voltage adjustable-reference supply.

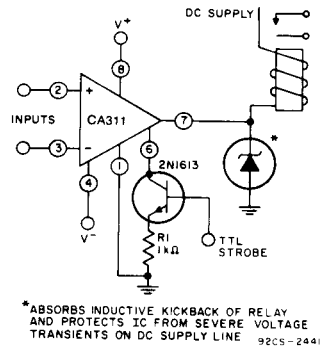


Fig. 24 - Relay driver with strobe.

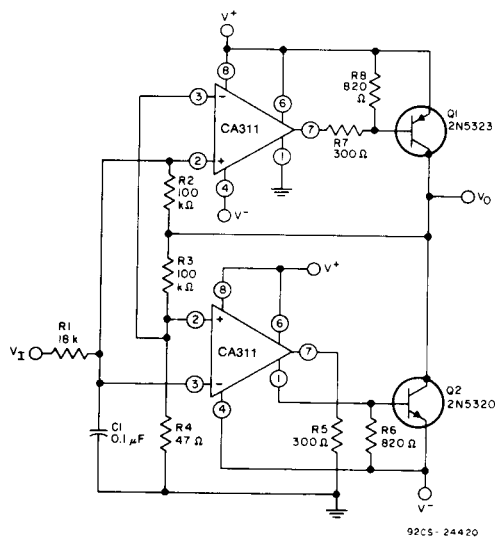


Fig. 27 - Switching power amplifier.

CA311, LM311

TYPICAL APPLICATIONS (cont'd)

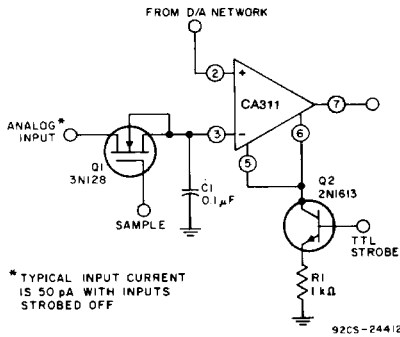


Fig. 28 - Strobing off both input and output stages.

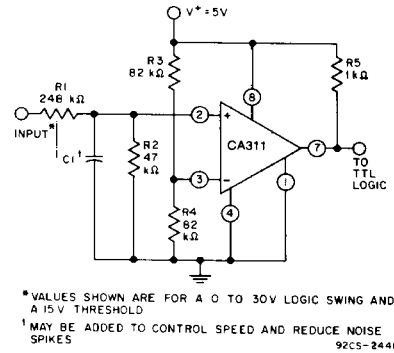


Fig. 29 - TTL interface with high-level logic.




Fig. 30 - Crystal oscillator.

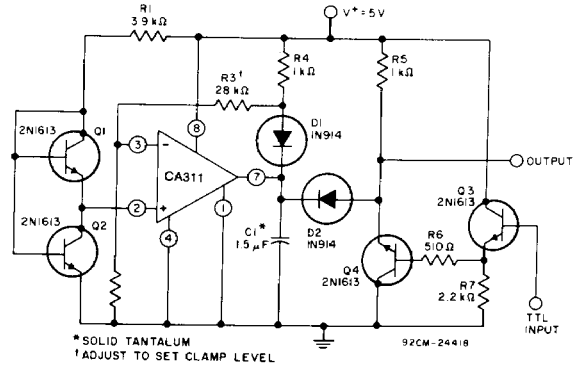


Fig. 31 - Precision squarer.


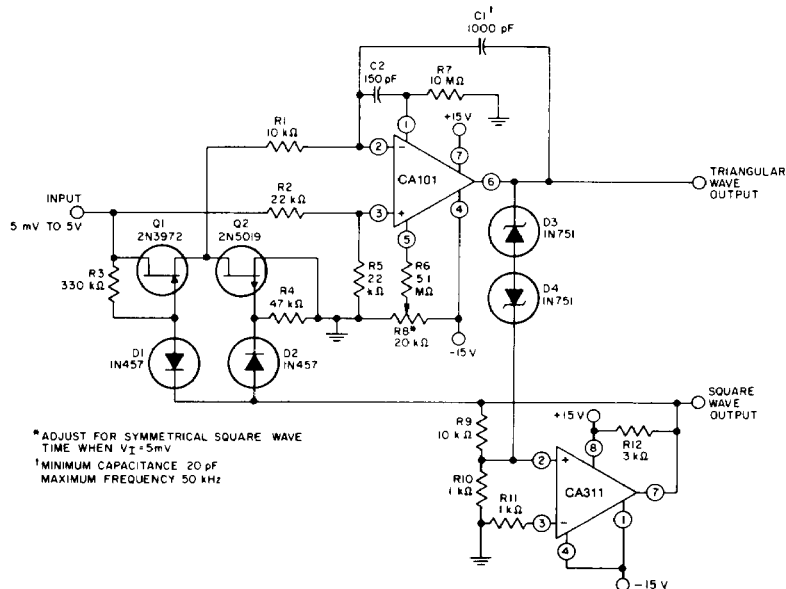



Fig. 32 - 10 Hz to 10 kHz voltage controlled oscillator.

TYPICAL APPLICATIONS (cont'd)

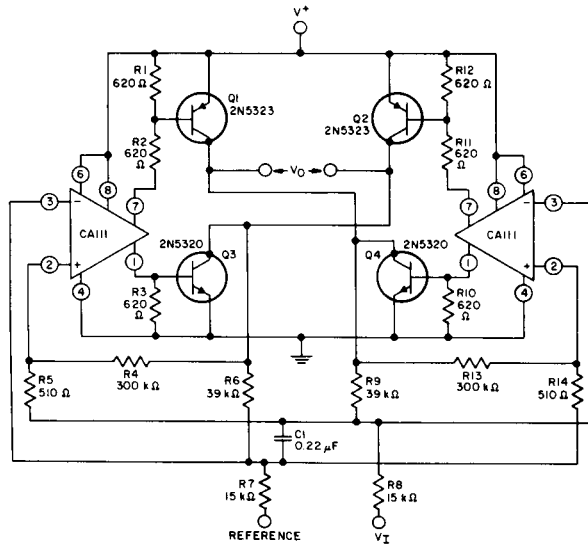

92CS-24421

Fig. 33 - Switching power amplifier.

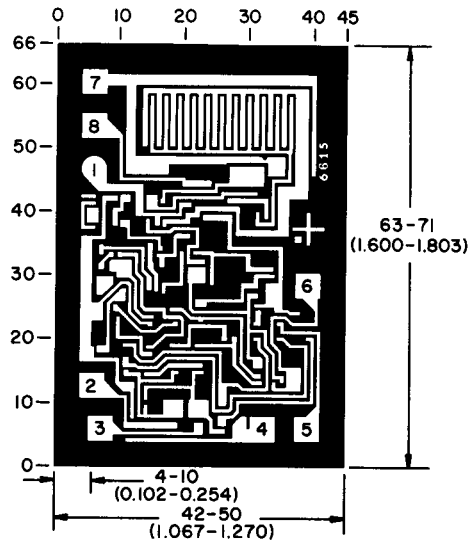

92CS-33253

Dimensions and pad layout for CA311H.

Dimensions in parentheses are in millimeters and are derived from the basic inch dimensions as indicated. Grid graduations are in mils (10⁻³ inch).