


SWITCHING APPLICATION.  
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

### FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Packing Density.

### EQUIVALENT CIRCUIT

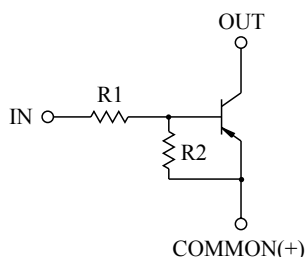

### BIAS RESISTOR VALUES


TYPE NO.	R1(k $\Omega$ )	R2(k $\Omega$ )
KRA721U	4.7	4.7
KRA722U	10	10
KRA723U	22	22
KRA724U	47	47
KRA725U	2.2	47
KRA726U	4.7	47

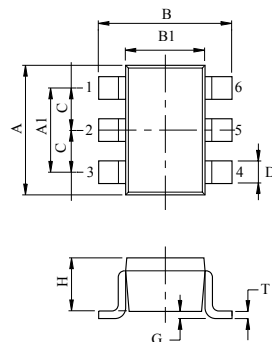

DIM	MILLIMETERS
A	2.00 $\pm$ 0.20
A1	1.3 $\pm$ 0.1
B	2.1 $\pm$ 0.1
B1	1.25 $\pm$ 0.1
C	0.65
D	0.2+0.10/-0.05
G	0-0.1
H	0.9 $\pm$ 0.1
T	0.15+0.1/-0.05

US6

### EQUIVALENT CIRCUIT (TOP VIEW)

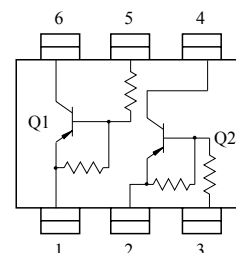

### MAXIMUM RATING (Ta=25°C)


CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRA721U ~ 726U	V <sub>O</sub>	-50	V
Input Voltage	KRA721U	V <sub>I</sub>	-20, 10	V
	KRA722U		-30, 10	
	KRA723U		-40, 10	
	KRA724U		-40, 10	
	KRA725U		-12, 5	
	KRA726U		-20, 5	
Output Current	KRA721U ~ 726U	I <sub>O</sub>	-100	mA
Power Dissipation		P <sub>D</sub> *	200	mW
Junction Temperature		T <sub>j</sub>	150	°C
Storage Temperature Range		T <sub>stg</sub>	-55 ~ 150	°C

\* Total Rating.

### MARK SPEC

TYPE	KRA721U	KRA722U	KRA723U	KRA724U	KRA725U	KRA726U
MARK	JA	JB	JC	JD	JE	JF

Marking Type Name



# KRA721U~KRA726U

## ELECTRICAL CHARACTERISTICS (Ta=25℃)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRA721U ~ 726U	$I_{O(OFF)}$	$V_O = -50V, V_I = 0$	-	-	-500	nA
DC Current Gain	KRA721U	$G_I$	$V_O = -5V, I_O = -10mA$	30	55	-	
	KRA722U			50	80	-	
	KRA723U			70	120	-	
	KRA724U			80	200	-	
	KRA725U			80	200	-	
	KRA726U			80	200	-	
Output Voltage	KRA721U ~ 726U	$V_{O(ON)}$	$I_O = -10mA, I_I = -0.5mA$	-	-0.1	-0.3	V
Input Voltage (ON)	KRA721U	$V_{I(ON)}$	$V_O = -0.2V, I_O = -5mA$	-	-1.5	-2.0	V
	KRA722U			-	-1.8	-2.4	
	KRA723U			-	-2.1	-3.0	
	KRA724U			-	-2.8	-5.0	
	KRA725U			-	-0.8	-1.1	
	KRA726U			-	-0.9	-1.3	
Input Voltage (OFF)	KRA721U ~ 724U	$V_{I(OFF)}$	$V_O = -5V, I_O = -0.1mA$	-1.0	-1.2	-	V
	KRA725U ~ 726U			-0.5	-0.65	-	
Transition Frequency	KRA721U ~ 726U	$f_T^*$	$V_O = -10V, I_O = -5mA$	-	200	-	MHz
Input Current	KRA721U	$I_I$	$V_I = -5V$	-	-	-1.8	mA
	KRA722U			-	-	-0.88	
	KRA723U			-	-	-0.36	
	KRA724U			-	-	-0.18	
	KRA725U			-	-	-3.6	
	KRA726U			-	-	-1.8	







Note : \* Characteristic of Transistor Only.

# KRA721U~KRA726U







## ELECTRICAL CHARACTERISTICS (Ta=25℃)

CHARACTERISTIC			SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRA721U	t <sub>r</sub>	V <sub>O</sub> =-5V V <sub>IN</sub> =-5V R <sub>L</sub> =1kΩ	-	0.07	-	μS
		KRA722U			-	0.06	-	
		KRA723U			-	0.2	-	
		KRA724U			-	0.24	-	
		KRA725U			-	0.02	-	
		KRA726U			-	0.07	-	
	Storage Time	KRA721U	t <sub>stg</sub>		-	1.1	-	
		KRA722U			-	1.1	-	
		KRA723U			-	1.1	-	
		KRA724U			-	1.1	-	
		KRA725U			-	1.1	-	
		KRA726U			-	1.1	-	
	Fall Time	KRA721U	t <sub>f</sub>		-	0.15	-	
		KRA722U			-	0.24	-	
		KRA723U			-	0.38	-	
		KRA724U			-	0.63	-	
		KRA725U			-	0.1	-	
		KRA726U			-	0.2	-	

# KRA721U~KRA726U

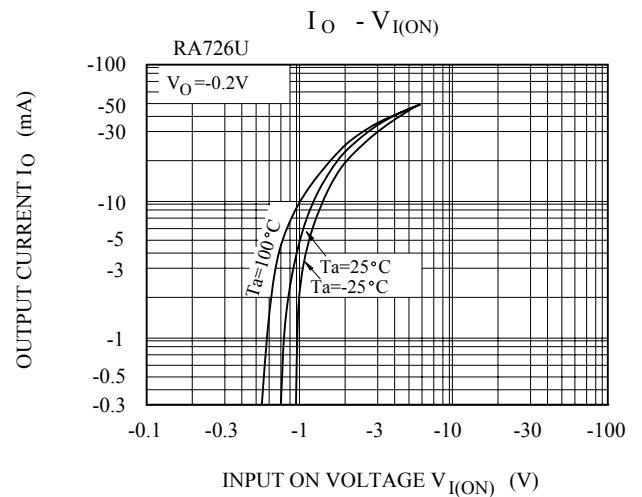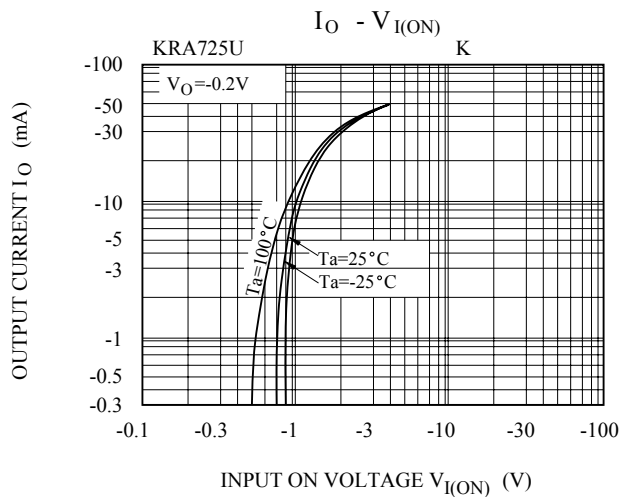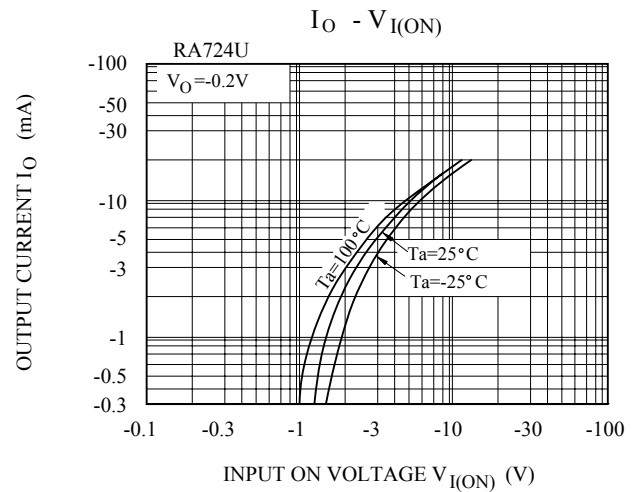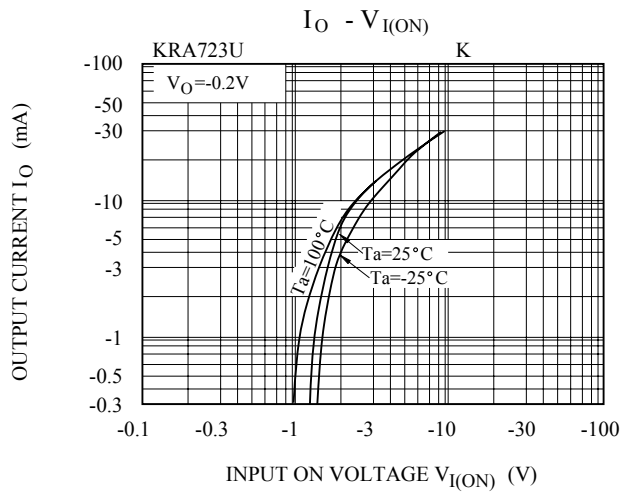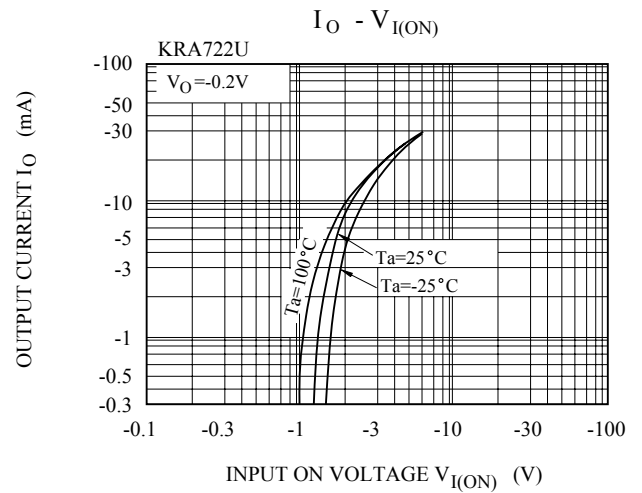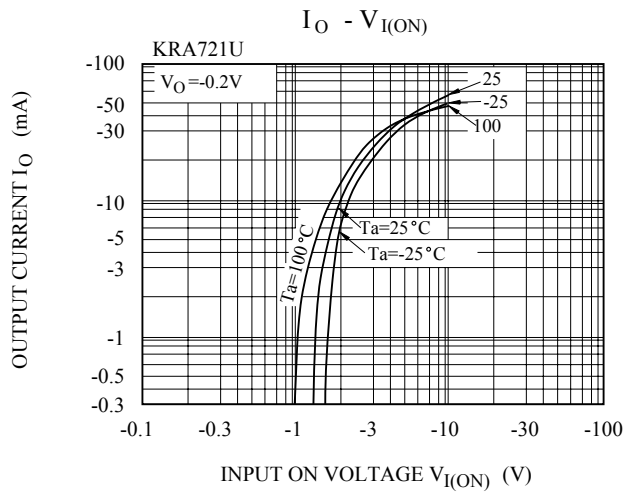

# KRA721U~KRA726U

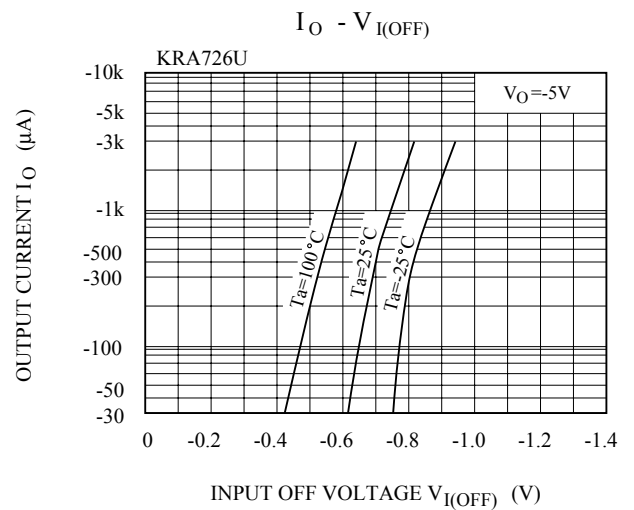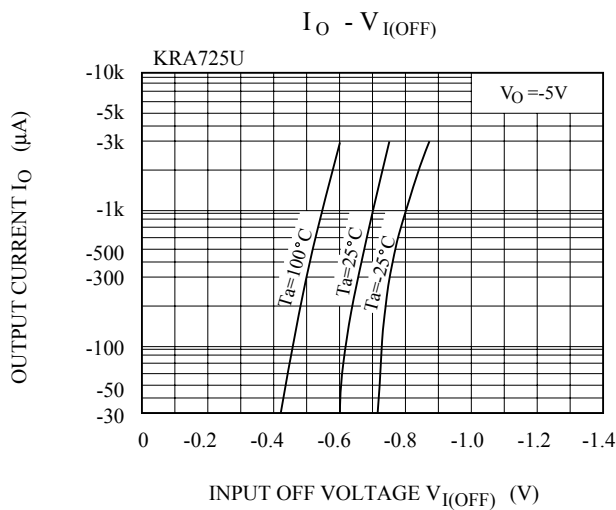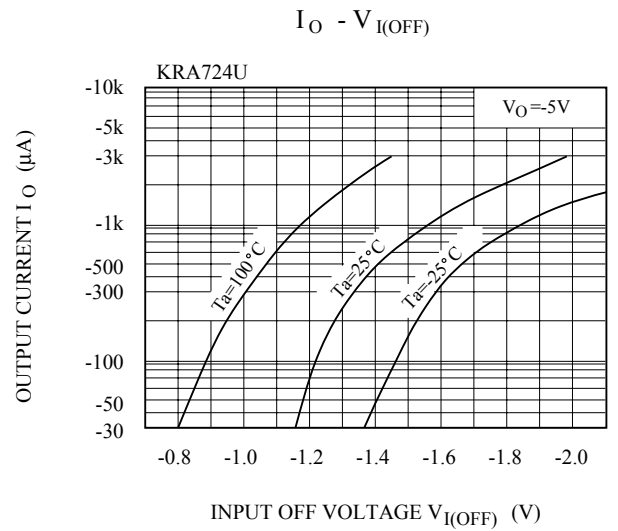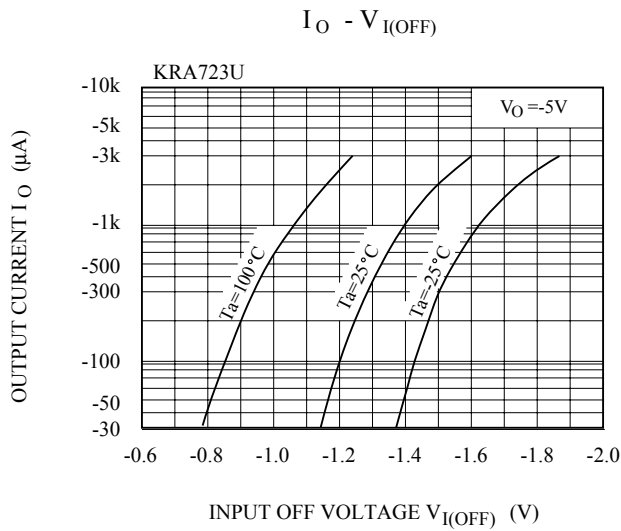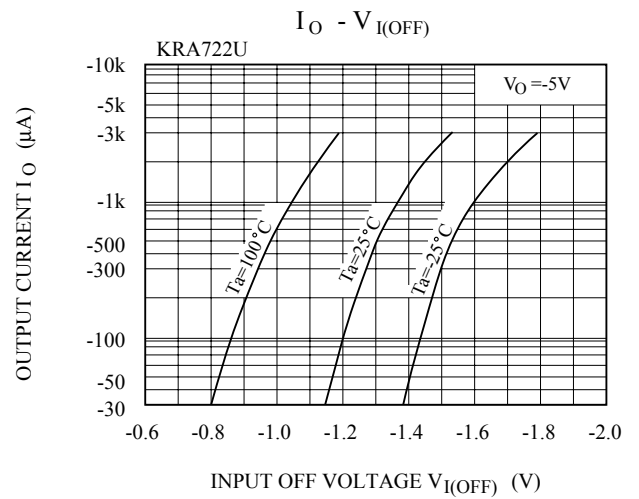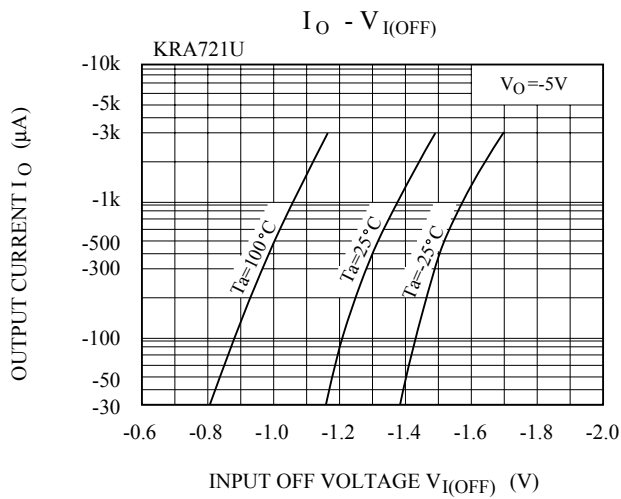

# KRA721U~KRA726U

