

RELAY DRIVERS, LAMP DRIVERS,  
MOTOR DRIVERS APPLICATION.

## FEATURES

- Adoption of MBIT Processes.
- Large Current Capacitance.
- Low Collector-to-Emitter Saturation Voltage.
- High-Speed Switching.
- Ultrasmall Package Facilitates Miniaturization in end Products.
- High Allowable Power Dissipation.
- Complementary to KTC3551T.


## MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		$V_{CBO}$	-50	V
Collector-Emitter Voltage		$V_{CES}$	-50	V
		$V_{CEO}$	-50	
Emitter-Base Voltage		$V_{EBO}$	-5	V
Collector Current	DC	$I_C$	-1.0	A
	Pulse	$I_{CP}$	-3	
Base Current		$I_B$	-200	mA
Collector Power Dissipation		$P_C^*$	0.9	W
Junction Temperature		$T_j$	150	°C
Storage Temperature Range		$T_{stg}$	-55 ~ 150	°C


\* Package mounted on a ceramic board (600mm<sup>2</sup> × 0.8mm)







## ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I <sub>CBO</sub>	V <sub>CB</sub> =-40V, I <sub>E</sub> =0	-	-	-0.1	μA
Emitter Cut-off Current		I <sub>EBO</sub>	V <sub>EB</sub> =-4V, I <sub>C</sub> =0	-	-	-0.1	μA
Collector-Base Breakdown Voltage		V <sub>(BR)CBO</sub>	I <sub>C</sub> =-10μA, I <sub>E</sub> =0	-50	-	-	V
Collector-Emitter Breakdown Voltage		V <sub>(BR)CES</sub>	I <sub>C</sub> =-100μA, V <sub>BE</sub> =0	-50	-	-	V
		V <sub>(BR)CEO</sub>	I <sub>C</sub> =-1mA, I <sub>B</sub> =0	-50	-	-	V
Emitter-Base Breakdown Voltage		V <sub>(BR)EBO</sub>	I <sub>E</sub> =-10μA, I <sub>C</sub> =0	-5	-	-	V
Collector-Emitter Saturation Voltage		V <sub>CE(sat)1</sub>	I <sub>C</sub> =-500mA, I <sub>B</sub> =-10mA	-	-280	-430	mV
		V <sub>CE(sat)2</sub>	I <sub>C</sub> =-300mA, I <sub>B</sub> =-6mA	-	-145	-220	mV
Base-Emitter Saturation Voltage		V <sub>BE(sat)</sub>	I <sub>C</sub> =-500mA, I <sub>B</sub> =-10mA	-	-0.81	-1.2	V
DC Current Gain		h <sub>FE</sub>	V <sub>CE</sub> =-2V, I <sub>C</sub> =-100mA	200	-	560	
Transition Frequency		f <sub>T</sub>	V <sub>CE</sub> =-10V, I <sub>C</sub> =-300mA	-	420	-	MHz
Collector Output Capacitance		C <sub>ob</sub>	V <sub>CB</sub> =-10V, f=1MHz	-	9	-	pF
Switching Time	Turn-On Time	t <sub>on</sub>	<p>PW=20μs DC ≤ 1% -I<sub>B1</sub> I<sub>B2</sub> INPUT 50Ω V<sub>R</sub> R<sub>B</sub> 100μF V<sub>BE</sub>=5V -20I<sub>B1</sub>=20I<sub>B2</sub>=I<sub>C</sub>=-500mA OUTPUT R<sub>L</sub> 470μF V<sub>CC</sub>=-25V</p>	-	35	-	nS
	Storage Time	t <sub>stg</sub>		-	170	-	
	Fall Time	t <sub>f</sub>		-	30	-	

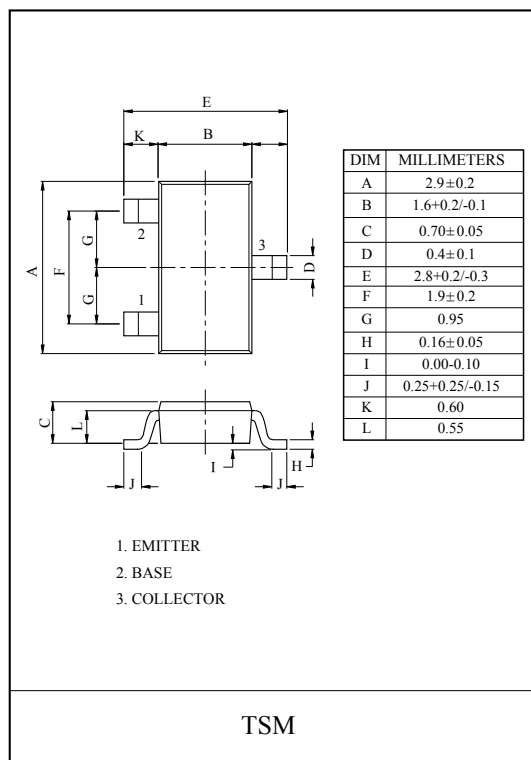

## Marking

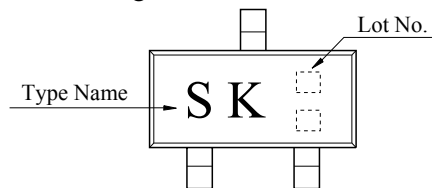

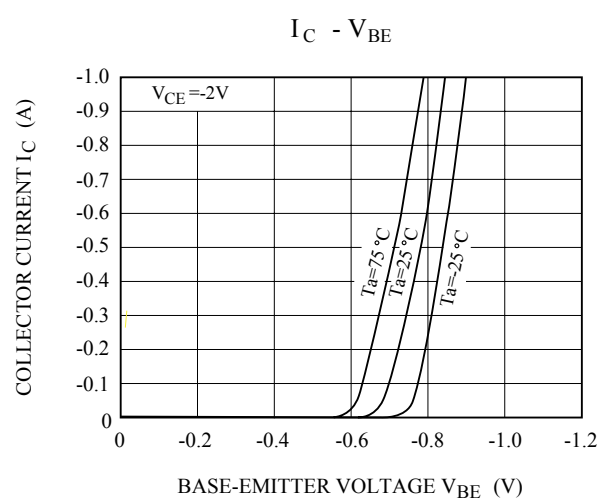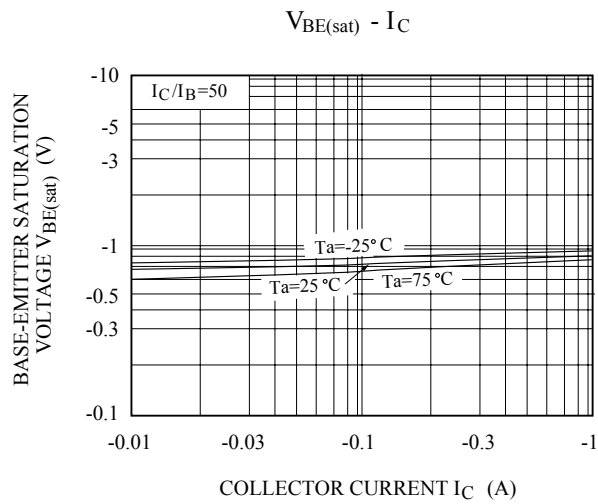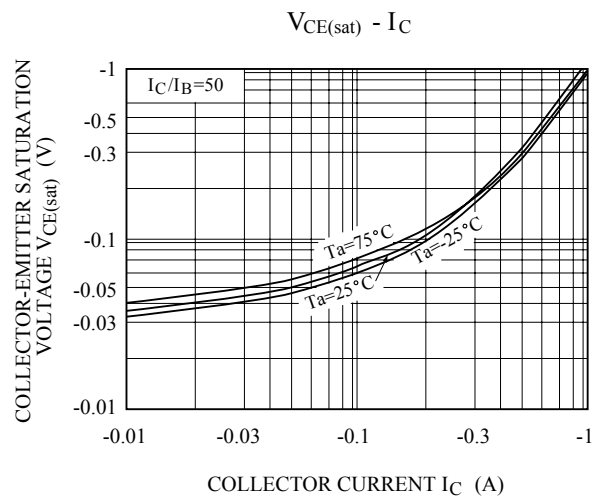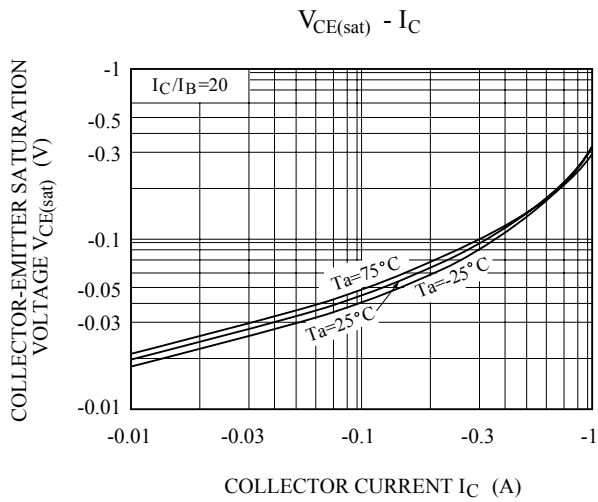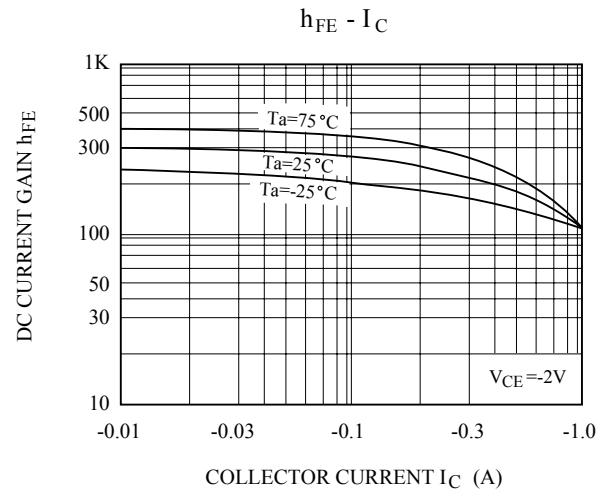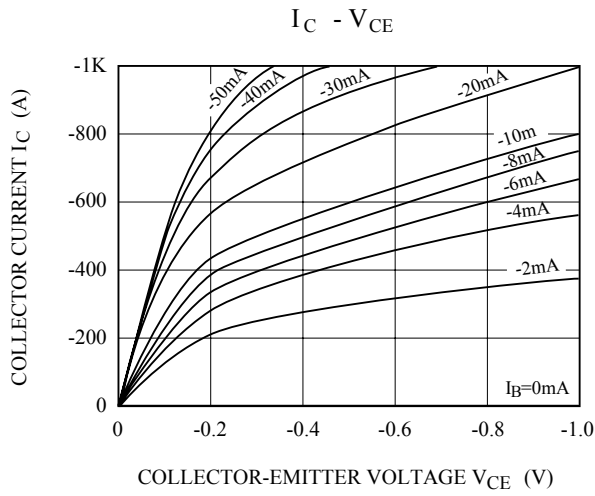

# KTA1551T

