

LG - 207

The LG - 207 photointerrupter combine high output GaAs IRED with photo IC.

The sensor makes possible easy development of object detecting systems with high performance, high reliability and small equipment size.

FEATURES


- Compatible to TTL and LSTTL
- Built in Amplifier and Schmitt Trigger
- Wide Vcc range

APPLICATIONS

- Floppy disk drives
- Copiers
- Facsimiles
- Paper sensors

DIMENSIONS

(Unit : mm)

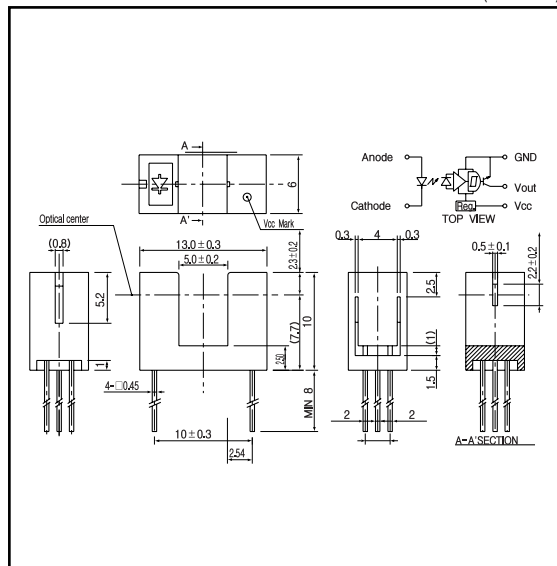

MAXIMUM RATINGS

(Ta=25)

Item		Symbol	Rating	Unit
Input	Power dissipation	P_o	100	mW
	Reverse voltage	V_R	5	V
	Forward current	I_F	60	mA
Output	Supply voltage	V_{CC}	16	V
	Low level output current	I_{OL}	30	mA
	Power dissipation	P	200	mW
	Operating temp.	$T_{opr.}$	- 20 ~ + 85	
Storage temp.		$T_{stg.}$	- 30 ~ + 85	
Soldering temp. ¹		$T_{sol.}$	240	

*1. For MAX. 5 seconds at the position of 1mm from the package


ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25)


Item		Symbol	Conditions	Min.	Typ.	Max.	Unit.
Input	Forward voltage	V _F	I _F =60mA		1.3	1.6	V
	Reverse current	I _R	V _R =5V			10	μA
	Capacitance	C _i	V=0V, f=1MHz		25		pF
Output	Operating supply voltage range	V _{CC}		4.5		16	V
	Low level output voltage	V _{OL}	I _{OL} =16mA, V _{CC} =5V, I _F =0			0.4	V
	High level output voltage ²	V _{OH}	I _F =10mA, V _{CC} =5V, R _L =10K	4			V
	Low level supply current	I _{CCL}	V _{CC} =5V, I _F =0		2	7	mA
	High level supply current	I _{CCH}	V _{CC} =5V, I _F =10mA		2	7	mA
	L _T H threshold input current	I _{FTH}	V _{CC} =5V		6		mA
Transm- ission	Hysteresis	I _{FHL} / I _{FLH}	V _{CC} =5V		0.75		-
	L _T H propagation time ^{2,3}	t _{PLH}	V _{CC} =5V, I _F =10mA		2		μsec.
	H _T L propagation time ³	t _{PHL}	R _L =280		1		

*2,*3. refer to measurement diagram as right side.


Power dissipation Vs. Ambient temperature

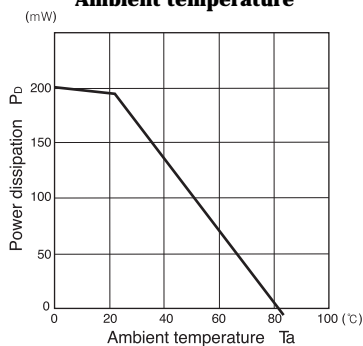


Forward current Vs. Forward voltage




Low level output voltage Vs. Low level output current




Relative threshold input current Vs. Supply voltage



Relative threshold input current Vs. Ambient temperature

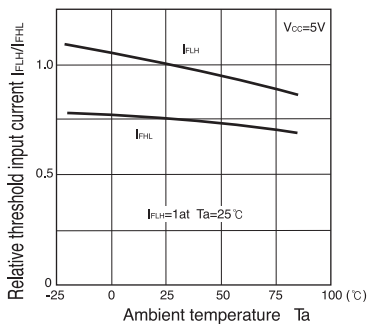

Measurement of high level output voltage



Measurement of propagation time

