


Voltage Transducer LV 25-1000

$$V_{PN} = 1000 \text{ V}$$

For the electronic measurement of voltages : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high voltage) and the secondary circuit (electronic circuit).

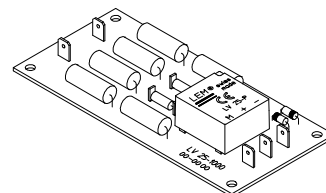

Electrical data

V_{PN}	Primary nominal r.m.s. voltage	1000	V
V_P	Primary voltage, measuring range	0 .. ± 1500	V
I_{PN}	Primary nominal r.m.s. current	8	mA
R_M	Measuring resistance	R_{Mmin} R_{Mmax}	
	with $\pm 12 \text{ V}$	@ $\pm 1000 \text{ V}_{max}$	30 200 Ω
		@ $\pm 1500 \text{ V}_{max}$	30 100 Ω
	with $\pm 15 \text{ V}$	@ $\pm 1000 \text{ V}_{max}$	100 320 Ω
		@ $\pm 1500 \text{ V}_{max}$	100 180 Ω
I_{SN}	Secondary nominal r.m.s. current	25	mA
K_N	Conversion ratio	1000 V / 25 mA	
V_C	Supply voltage ($\pm 5\%$)	$\pm 12 \dots 15$	V
I_C	Current consumption	10 (@ $\pm 15 \text{ V}$) + I_S	mA
V_d	R.m.s. voltage for AC isolation test ¹⁾ , 50 Hz, 1 mn	4.1	kV

Features

- Closed loop (compensated) voltage transducer using the Hall effect
- Transducer with insulated plastic case recognized according to UL 94-V0
- Primary resistor R_1 and transducer mounted on printed circuit board 128 x 60 mm.

Advantages

- Excellent accuracy
- Very good linearity
- Low thermal drift
- High immunity to external interference.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Uninterruptible Power Supplies (UPS)
- Power supplies for welding applications.

Accuracy - Dynamic performance data

X_G	Overall Accuracy @ V_{PN} , $T_A = 25^\circ\text{C}$	± 0.8	%
e_L	Linearity	< 0.2	%
I_O	Offset current @ $I_P = 0$, $T_A = 25^\circ\text{C}$	Typ Max	
I_{OT}	Thermal drift of I_O	$-25^\circ\text{C} \dots +25^\circ\text{C}$	± 0.15 mA
		$+25^\circ\text{C} \dots +70^\circ\text{C}$	± 0.10 ± 0.60 mA
t_r	Response time @ 90 % of V_{Pmax}	40	μs

General data


T_A	Ambient operating temperature	$-25 \dots +70$	$^\circ\text{C}$
T_S	Ambient storage temperature	$-40 \dots +85$	$^\circ\text{C}$
N	Turns ratio	3100 : 1000	
P	Total primary power loss	8	W
R_1	Primary resistance @ $T_A = 25^\circ\text{C}$	125	k Ω
R_S	Secondary coil resistance @ $T_A = 70^\circ\text{C}$	110	Ω
m	Mass	60	g
	Standards ²⁾	EN 50178	

Notes : ¹⁾ Between primary and secondary

²⁾ A list of corresponding tests is available

980909/2

Dimensions LV 25-1000 (in mm. 1 mm = 0.0394 inch)

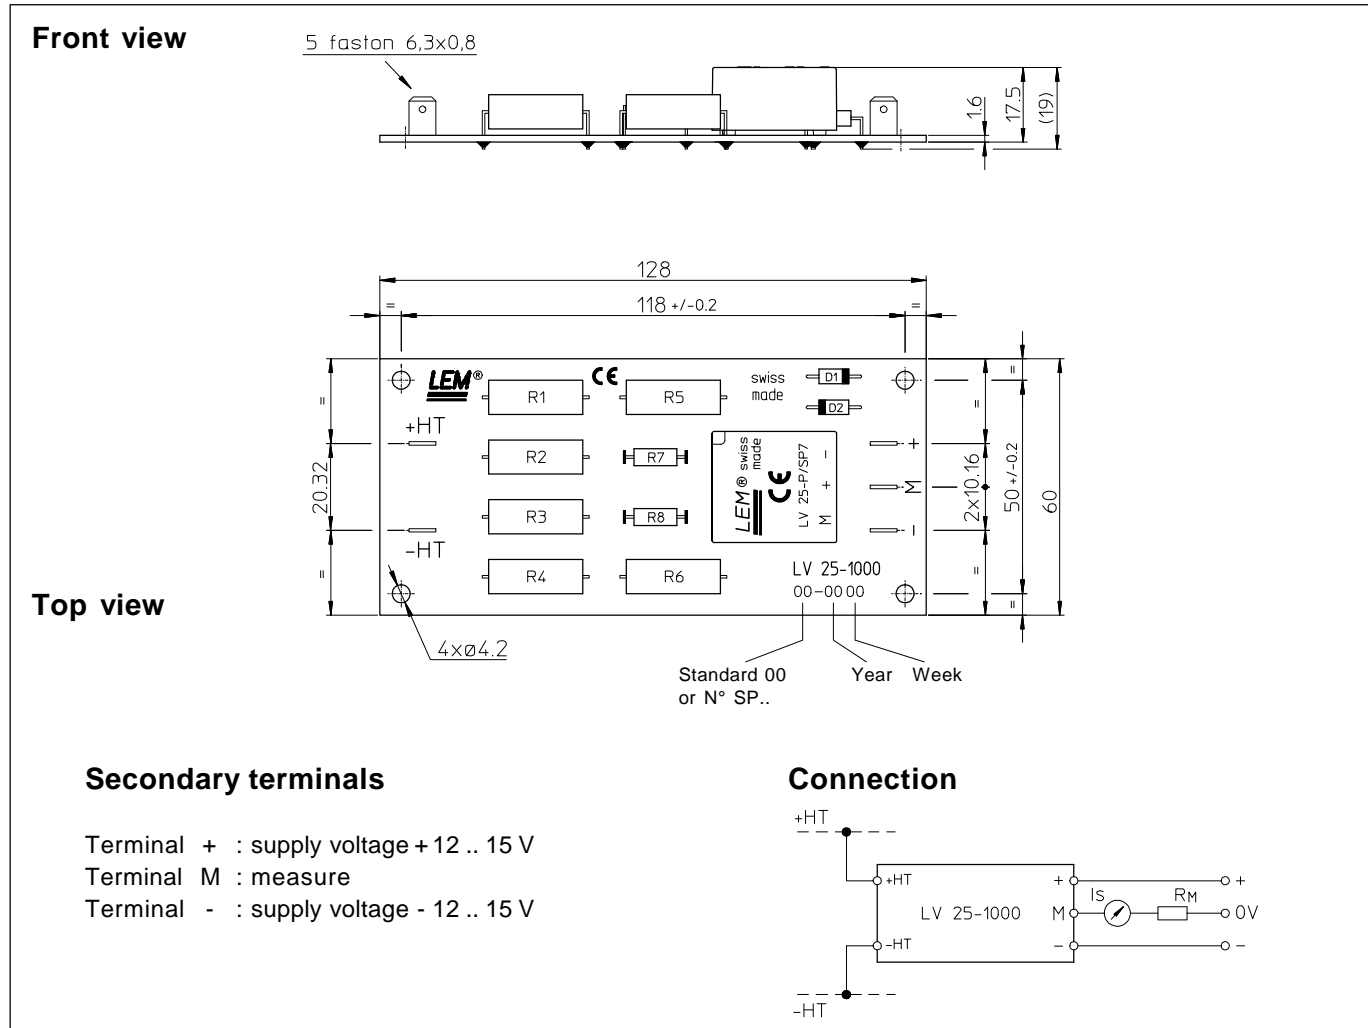

Mechanical characteristics

- General tolerance ± 0.3 mm
- Fastening 4 holes $\varnothing 4.2$ mm
- Connection of primary Faston 6.3×0.8 mm
- Connection of secondary Faston 6.3×0.8 mm

Remarks

- I_s is positive when V_p is applied on terminal +HT.
- The primary circuit of the transducer must be linked to the connections where the voltage has to be measured.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.