

# 3.3V Low Power EIA/TIA-562 3-Driver/ 5-Receiver Transceiver

## FEATURES

- **Low Supply Current: 300 $\mu$ A**
- **Receivers 4 and 5 Kept Alive in Shutdown: 35 $\mu$ A**
- **ESD Protection:  $\pm 10$ kV**
- **Operates from a Single 3.3V Supply**
- **Uses Small Capacitors: 0.1 $\mu$ F**
- **Operates to 120kBaud**
- **Three-State Outputs are High Impedance When Off**
- **Output Overvoltage Does Not Force Current Back into Supplies**
- **EIA/TIA-562 I/O Lines Can Be Forced to  $\pm 25$ V Without Damage**
- **Flowthrough Architecture**

## APPLICATIONS

- Notebook Computers
- Palmtop Computers

## DESCRIPTION

The LTC<sup>®</sup>1350 is a 3-driver/5-receiver EIA/TIA-562 transceiver with very low supply current. In the no load condition, the supply current is only 300 $\mu$ A. The charge pump only requires four 0.1 $\mu$ F capacitors.


In Shutdown mode, two receivers are kept alive and the supply current is only 35 $\mu$ A. All RS232 outputs assume a high impedance state in Shutdown or with the power off.

The LTC1350 is fully compliant with all data rate and overvoltage EIA/TIA-562 specifications. The transceiver can operate up to 120kbaud with a 1000pF and 3k $\Omega$  load. Both driver outputs and receiver inputs can be forced to  $\pm 25$ V without damage and can survive multiple  $\pm 10$ kV ESD strikes.


LT, LTC and LT are registered trademarks of Linear Technology Corporation.

## TYPICAL APPLICATION

**3-Drivers/5-Receivers with Shutdown**

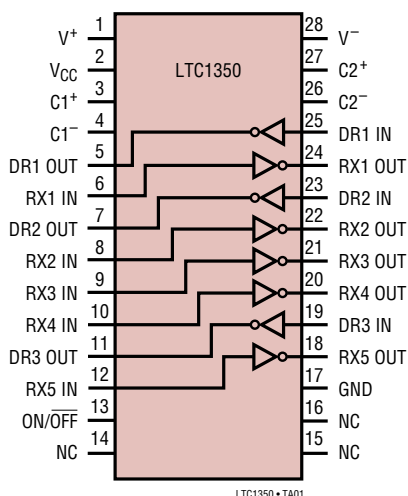

**Quiescent and Shutdown Supply Current vs Temperature**

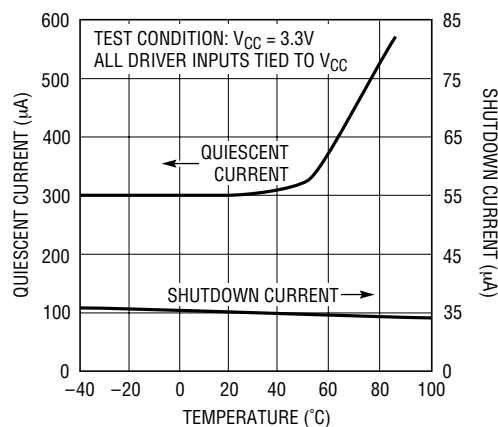

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage ( $V_{CC}$ )	5V
Input Voltage	
Driver	$-0.3V$ to $V_{CC} + 0.3V$
Receiver	$-25V$ to $25V$
ON/OFF Pin	$-0.3V$ to $V_{CC} + 0.3V$
Output Voltage	
Driver	$-25V$ to $25V$
Receiver	$-0.3V$ to $V_{CC} + 0.3V$
Short-Circuit Duration	
$V^+$	30 sec
$V^-$	30 sec
Driver Output	Indefinite
Receiver Output	Indefinite
Operating Temperature Range	
Commercial (LTC1350C)	$0^{\circ}C$ to $70^{\circ}C$
Industrial (LTC1350I)	$-40^{\circ}C$ to $85^{\circ}C$
Storage Temperature Range	$-65^{\circ}C$ to $150^{\circ}C$
Lead Temperature (Soldering, 10 sec)	$300^{\circ}C$

## PACKAGE/ORDER INFORMATION

TOP VIEW		ORDER PART NUMBER
$V^+$ [1]	[28] $V^-$	LTC1350CG LTC1350CNW LTC1350CSW LTC1350IG LTC1350INW LTC1350ISW
$V_{CC}$ [2]	[27] $C2^+$	
$C1^+$ [3]	[26] $C2^-$	
$C1^-$ [4]	[25] DR1 IN	
DR1 OUT [5]	[24] RX1 OUT	
RX1 IN [6]	[23] DR2 IN	
DR2 OUT [7]	[22] RX2 OUT	
RX2 IN [8]	[21] RX3 OUT	
RX3 IN [9]	[20] RX4 OUT	
RX4 IN [10]	[19] DR3 IN	
DR3 OUT [11]	[18] RX5 OUT	
RX5 IN [12]	[17] GND	
ON/OFF [13]	[16] NC	
NC [14]	[15] NC	
G PACKAGE 28-LEAD SSOP		NW PACKAGE 28-LEAD PDIP
SW PACKAGE 28-LEAD PLASTIC SO WIDE		
$T_{JMAX} = 125^{\circ}C$ , $\theta_{JA} = 96^{\circ}C/W$ (G)		
$T_{JMAX} = 125^{\circ}C$ , $\theta_{JA} = 56^{\circ}C/W$ (NW)		
$T_{JMAX} = 125^{\circ}C$ , $\theta_{JA} = 85^{\circ}C/W$ (SW)		

Consult LTC Marketing for parts specified with wider operating temperature ranges.

## DC ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range.  $V_{CC} = 3.3V$ ,  $C1 = C2 = C3 = C4 = 0.1\mu F$ , unless noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>Any Driver</b>					
Output Voltage Swing	3k to GND	● 3.7	4.5		V
	Positive	● -3.7	-4.5		V
Logic Input Voltage Level	Input Low Level ( $V_{OUT} = \text{High}$ )	● 2.0	1.4	0.8	V
	Input High Level ( $V_{OUT} = \text{Low}$ )	● 2.0	1.4		V
Logic Input Current	$V_{IN} = V_{CC}$	●		5	$\mu A$
	$V_{IN} = 0V$	●		-5	$\mu A$
Output Short-Circuit Current	$V_{OUT} = 0V$	±9	±10		mA
Output Leakage Current	Shutdown (Note 3), $V_{OUT} = \pm 20V$		10	500	$\mu A$
<b>Any Receiver</b>					
Input Voltage Thresholds	Input Low Threshold	● 0.8	1.3		V
	Input High Threshold	● 0.8	1.7	2.4	V
Hysteresis		● 0.1	0.4	1	V
Input Resistance	$V_{IN} = \pm 10V$	3	5	7	k $\Omega$
Output Voltage	Output Low, $I_{OUT} = -1.6mA$ ( $V_{CC} = 3.3V$ )	● 3.0	0.2	0.4	V
	Output High, $I_{OUT} = 160\mu A$ ( $V_{CC} = 3.3V$ )	● 3.0	3.2		V
Output Short-Circuit Current	Sinking Current, $V_{OUT} = V_{CC}$	-3	-20		mA
Output Leakage Current	Shutdown (Note 3), $0V \leq V_{OUT} \leq V_{CC}$	●	1	10	$\mu A$

## DC ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range.  $V_{CC} = 3.3V$ ,  $C1 = C2 = C3 = C4 = 0.1\mu F$ , unless noted.

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
<b>Power Supply Generator</b>						
$V^+$ Output Voltage	$I_{OUT} = 0mA$			5.7		V
	$I_{OUT} = 5mA$			5.5		V
$V^-$ Output Voltage	$I_{OUT} = 0mA$			-5.3		V
	$I_{OUT} = -5mA$			-5.0		V
Supply Rise Time	Shutdown to Turn-On			0.2		ms
<b>Power Supply</b>						
$V_{CC}$ Supply Current	No Load (All Drivers $V_{IN} = V_{CC}$ )(Note 2) $0^\circ C \leq T_A \leq 70^\circ C$	●		0.3	0.6	mA
	No Load (All Drivers $V_{IN} = 0$ )(Note 2) $0^\circ C \leq T_A \leq 70^\circ C$	●		0.5	1.0	mA
	No Load (All Drivers $V_{IN} = V_{CC}$ )(Note 2) $0^\circ C \leq T_A \leq 85^\circ C$	●		0.3	1.0	mA
	No Load (All Drivers $V_{IN} = V_{CC}$ )(Note 2) $-40^\circ C \leq T_A \leq 0^\circ C$	●		0.3	1.5	mA
	No Load (All Drivers $V_{IN} = 0$ )(Note 2) $-40^\circ C \leq T_A \leq 85^\circ C$	●		0.5	1.5	mA
	Shutdown (Note 3)	●		35	50	$\mu A$
ON/OFF Threshold Low		●		1.4	0.8	V
ON/OFF Threshold High		●	2.0	1.4		V

## AC CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range.  $V_{CC} = 5V$ ,  $C1 = C2 = C3 = C4 = 0.1\mu F$ , unless noted.

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Slew Rate	$R_L = 3k, C_L = 51pF$			8	30	V/ $\mu s$
	$R_L = 3k, C_L = 1000pF$		3	5		V/ $\mu s$
Driver Propagation Delay (TTL to EIA/TIA-562)	$t_{HLD}$ (Figure 1)	●		2	3.5	$\mu s$
	$t_{LHD}$ (Figure 1)	●		2	3.5	$\mu s$
Receiver Propagation Delay (EIA/TIA-562 to TTL)	$t_{HLR}$ (Figure 2)	●		0.3	0.8	$\mu s$
	$t_{LHR}$ (Figure 2)	●		0.3	0.8	$\mu s$


**Note 1:** Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.

**Note 2:** Supply current is measured with driver and receiver outputs unloaded.

**Note 3:** Supply current measurement in Shutdown mode is performed with  $V_{ON/OFF} = 0V$ .


## TYPICAL PERFORMANCE CHARACTERISTICS

**Driver Output Voltage vs Temperature**

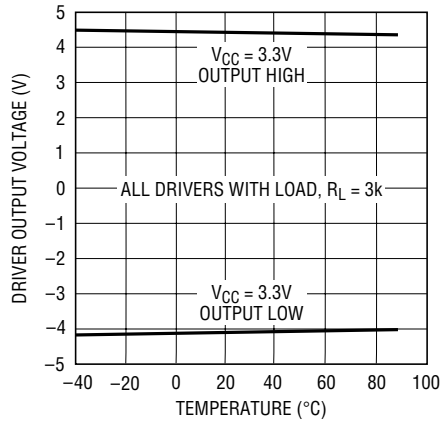


LTC1350 • TPC01

**Receiver Input Thresholds vs Temperature**

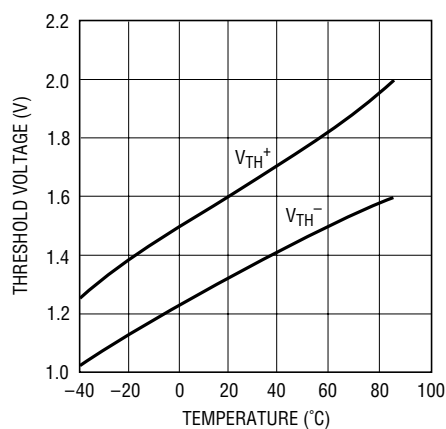


LTC1350 • TPC02

**Supply Current vs Data Rate**

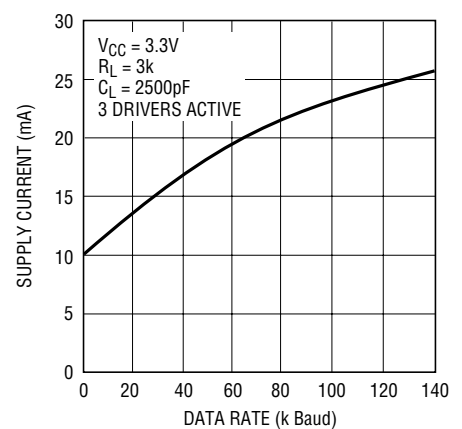


LTC1350 • TPC03

**VCC Supply Current vs Temperature**

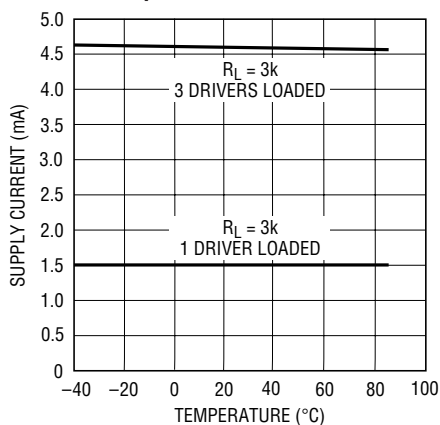


LTC1350 • TPC04

**Driver Leakage in Shutdown vs Temperature**

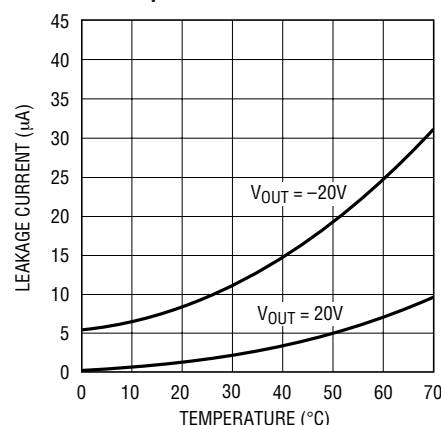


LTC1350 • TPC05

**Driver Short-Circuit Current vs Temperature**

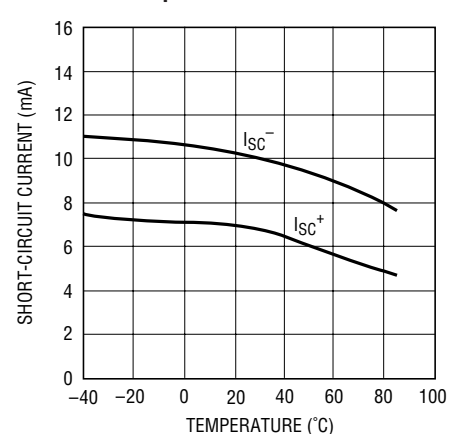


LTC1350 • TPC06

**Receiver Short-Circuit Current vs Temperature**

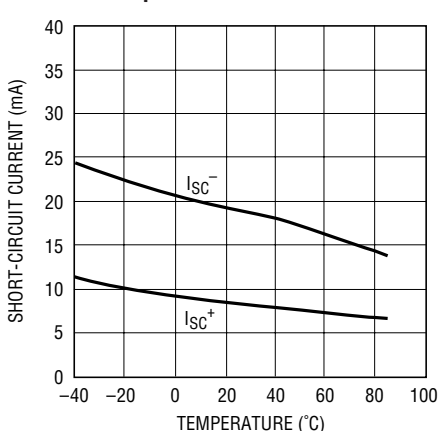


LTC1350 • TPC07

**Driver Output Waveforms**

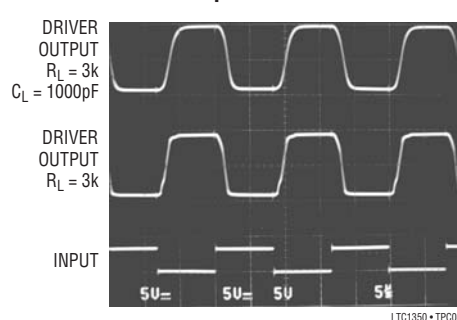

LTC1350 • TPC08

**Receiver Output Waveform**

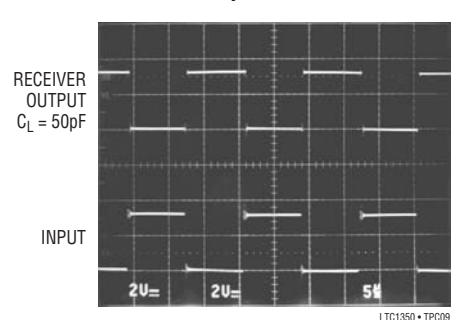

LTC1350 • TPC09

## PIN FUNCTIONS

**V<sub>CC</sub>**: 3.3V Input Supply Pin. Supply current is typically 35 $\mu$ A in the Shutdown mode. This pin should be decoupled with a 0.1 $\mu$ F ceramic capacitor.

**GND**: Ground Pin.

**ON/OFF**: TTL/CMOS Compatible Shutdown Pin. A logic low puts the device in the Shutdown mode with receivers 4 and 5 kept alive and the supply current equal to 35 $\mu$ A. All driver and other receiver outputs are in high impedance state. This pin cannot float.

**V<sup>+</sup>**: Positive Supply Output.  $V^+ \approx 2V_{CC} - 1V$ . This pin requires an external capacitor ( $C = 0.1\mu F$ ) for charge storage. The capacitor may be tied to ground or  $V_{CC}$ . With multiple devices, the  $V^+$  and  $V^-$  pins may be paralleled into common capacitors. For a large number of devices, increasing the size of the shared common storage capacitors is recommended to reduce ripple.

**V<sup>-</sup>**: Negative Supply Output.  $V^- \approx -(2V_{CC} - 1.3V)$ . This pin requires an external capacitor ( $C = 0.1\mu F$ ) for charge storage.

**C1<sup>+</sup>, C1<sup>-</sup>, C2<sup>+</sup>, C2<sup>-</sup>**: Commutating Capacitor Inputs. These pins require two external capacitors ( $C = 0.1\mu F$ ): one from C1<sup>+</sup> to C1<sup>-</sup> and another from C2<sup>+</sup> to C2<sup>-</sup>. To maintain charge pump efficiency, the capacitor's effective series resistance should be less than 20 $\Omega$ .

**DR IN**: EIA/TIA-562 Driver Input Pins. Inputs are TTL/CMOS compatible. Inputs should not be allowed to float. Tie unused inputs to  $V_{CC}$ .

**DR OUT**: Driver Outputs at EIA/TIA-562 Voltage Levels. Outputs are in a high impedance state when in the Shutdown mode or  $V_{CC} = 0V$ . The driver outputs are protected against ESD to  $\pm 10kV$  for human body model discharges.

**RX IN**: Receiver Inputs. These pins can be forced to  $\pm 25V$  without damage. The receiver inputs are protected against ESD to  $\pm 10kV$  for human body model discharges. Each receiver provides 0.4V of hysteresis for noise immunity.

**RX OUT**: Receiver Outputs with TTL/CMOS Voltage Levels. Receiver 1, 2 and 3 outputs are in a high impedance state when in Shutdown mode to allow data line sharing. Receivers 4 and 5 are kept alive in Shutdown.

## SWITCHING TIME WAVEFORMS

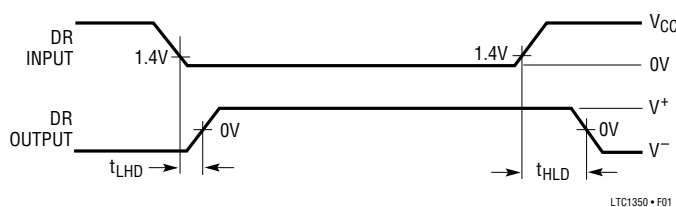


Figure 1. Driver Propagation Delay Timing


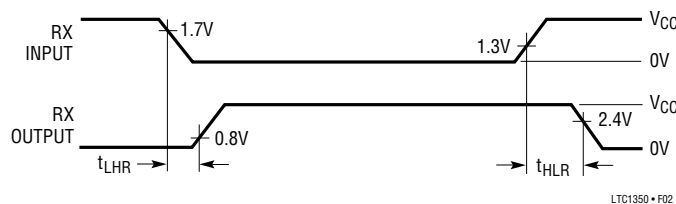



Figure 2. Receiver Propagation Delay Timing

TEST CIRCUITS


Driver Timing Test Load

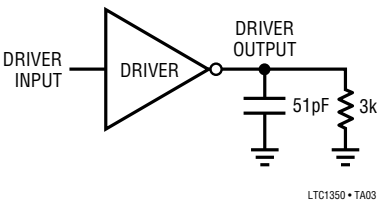

Receiver Timing Test Load




ESD Test Circuit

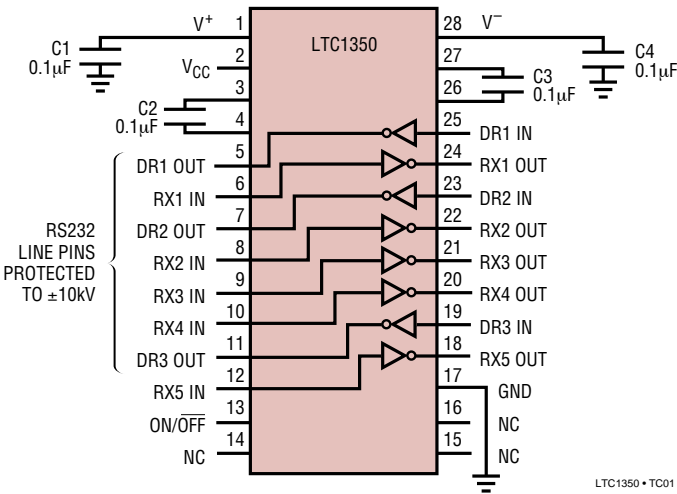


## PACKAGE DESCRIPTION

### G Package 28-Lead Plastic SSOP (5.3mm) (Reference LTC DWG # 05-08-1640)

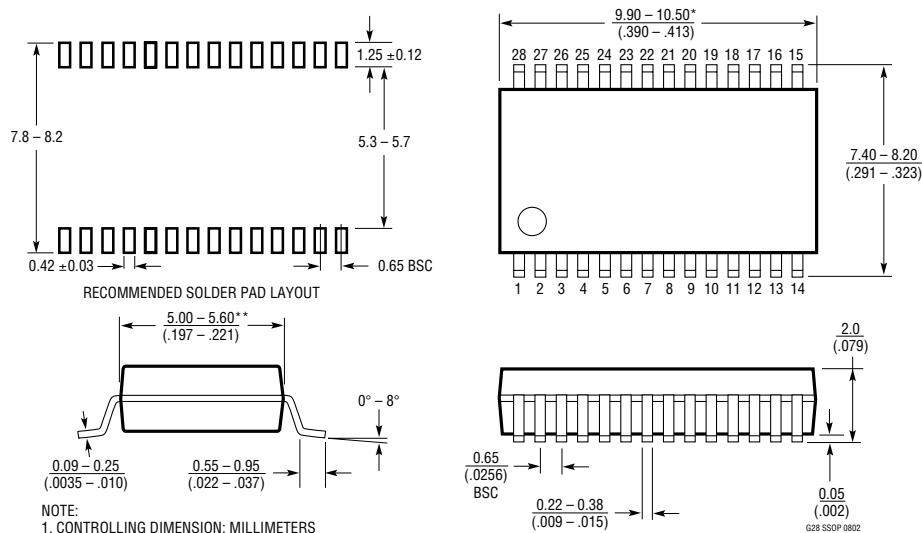


### NW Package 28-Lead PDIP (Wide .600 Inch) (Reference LTC DWG # 05-08-1520)

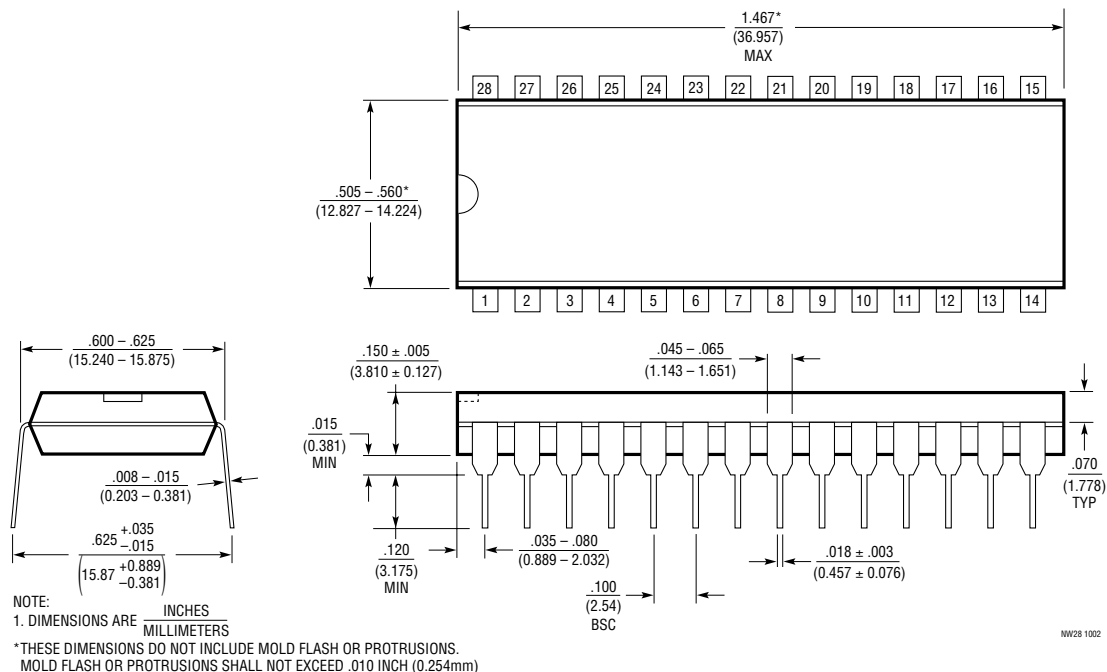

NW28 1002

## PACKAGE DESCRIPTION

### SW Package 28-Lead Plastic Small Outline (Wide .300 Inch) (Reference LTC DWG # 05-08-1620)

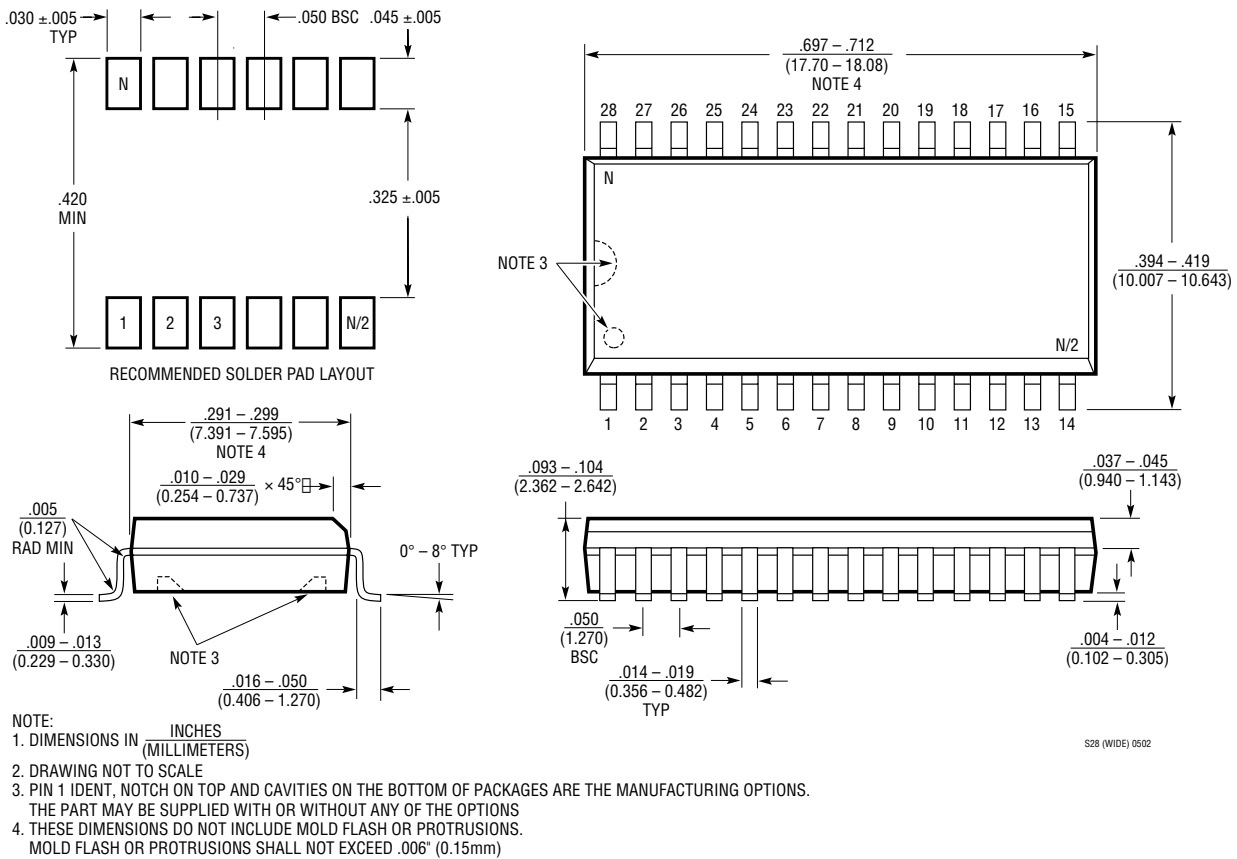

S28 (WIDE) 0502

## RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT <sup>®</sup> 1137A	5V, 3 Driver, 5 Receiver RS232 Transceiver	±15kV ESD per IEC 1000-4
LTC1327	3.3V, 3 Driver, 5 Receiver RS562 Transceiver	300μA Supply Current, 0.2μA in Shutdown
LTC1337	5V, 3 Driver, 5 Receiver RS232 Transceiver	300μA Supply Current, 1μA in Shutdown
LTC1348	3.3V to 5V, 3 Driver, 5 Receiver RS232 Transceiver	True RS232 on 3.3V, 5 Receivers Active in Shutdown
LTC1385	3.3V, 2 Driver, 2 Receiver RS562 Transceiver	200μA Supply Current, 2 Receivers Active in Shutdown
LTC1386	3.3V, 2 Driver, 2 Receiver RS562 Transceiver	200μA Supply Current, Narrow 16-Pin SO
LTC2844	3.3V, Software-Selectable Multiprotocol Transceiver	4 Drivers, 4 Receivers for Control Signals Including LL
LTC2845	3.3V, Software-Selectable Multiprotocol Transceiver	5 Drivers, 5 Receivers for Control Signals Including LL, RL and TM
LTC2846	3.3V, Software-Selectable Multiprotocol Transceiver	4 Drivers, 4 Receivers with Termination for Data/Clock