

Plug-In

RF Transformer

50Ω

0.050 to 600 MHz

TMO2-1+



CASE STYLE: A11
PRICE: \$10.20 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	250mW
DC Current	30mA

Pin Connections

PRIMARY DOT	1
PRIMARY	6
SECONDARY DOT	2
SECONDARY	6
CASE GROUND	7, 8
NOT USED	3, 4, 5

Outline Drawing

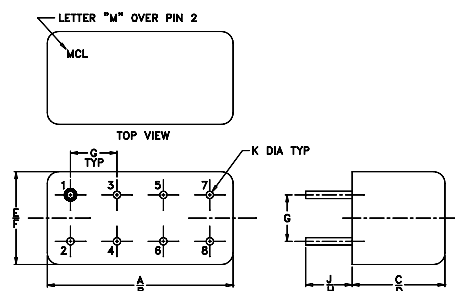


NOTE: BLUE BEAD INDICATES PIN 1.
PIN NUMBERS DO NOT APPEAR ON UNIT,
FOR REFERENCE ONLY.

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.480	.500	.240	.255	.210	.230
12.19	12.70	6.10	6.48	5.33	5.84

G	H	J	K	wt
.100	.20	.14	.020	grams
2.54	5.08	3.56	0.51	1.9

Config. D



Features

- wideband, 0.050 to 600 MHz
- excellent return loss
- hermetic case

Applications

- military, hi-rel requirements
- impedance matching

Transformer Electrical Specifications


Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
2	0.050-600	0.050-600	0.1-400	0.5-200

*Insertion Loss is referenced to mid-band loss, 0.2 dB typ.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
0.05	2.50	6.00
0.30	0.28	17.65
1.27	0.24	21.54
5.34	0.15	23.03
22.53	0.16	23.09
49.60	0.18	21.63
193.38	0.26	13.91
401.16	0.59	8.29
498.35	0.88	6.75
600.00	1.20	5.65

TMO2-1
INSERTION LOSS

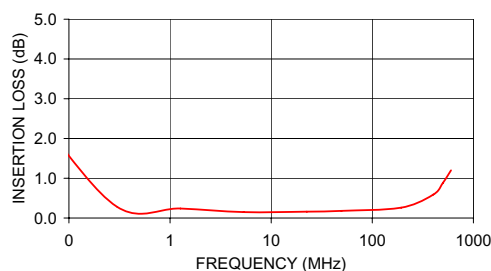

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. A
M98898
TMO2-1+
IG/TD/CP
060710