


Amplifier Transistors

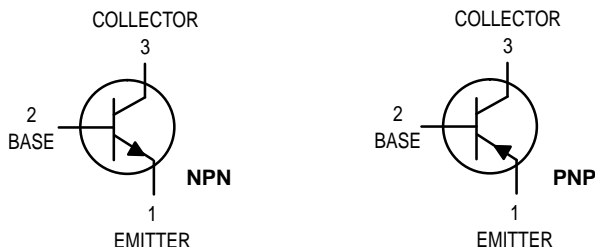

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage MPS6601/6651 MPS6602/6652	V_{CEO}	25 40	Vdc
Collector–Base Voltage MPS6601/6651 MPS6602/6652	V_{CBO}	25 30	Vdc
Emitter–Base Voltage	V_{EBO}	4.0	Vdc
Collector Current — Continuous	I_C	1000	mAdc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	625 5.0	mW mW/ $^\circ\text{C}$
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	1.5 12	Watts mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–55 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}^{(1)}$	200	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	$^\circ\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector–Emitter Breakdown Voltage ($I_C = 1.0 \text{ mAdc}$, $I_B = 0$)	MPS6601/6651 MPS6602/6652	$V_{(BR)CEO}$	25 40	— —	Vdc
Collector–Base Breakdown Voltage ($I_C = 100 \mu\text{Adc}$, $I_E = 0$)	MPS6601/6651 MPS6602/6652	$V_{(BR)CBO}$	25 40	— —	Vdc
Emitter–Base Breakdown Voltage ($I_E = 10 \mu\text{Adc}$, $I_C = 0$)		$V_{(BR)EBO}$	4.0	—	Vdc
Collector Cutoff Current ($V_{CE} = 25 \text{ Vdc}$, $I_B = 0$) ($V_{CE} = 30 \text{ Vdc}$, $I_B = 0$)	MPS6601/6651 MPS6602/6652	I_{CES}	— —	0.1 0.1	μAdc
Collector Cutoff Current ($V_{CB} = 25 \text{ Vdc}$, $I_E = 0$) ($V_{CB} = 30 \text{ Vdc}$, $I_E = 0$)	MPS6601/6651 MPS6602/6652	I_{CBO}	— —	0.1 0.1	μAdc

1. $R_{\theta JA}$ is measured with the device soldered into a typical printed circuit board.

Preferred devices are Motorola recommended choices for future use and best overall value.

NPN
MPS6601
MPS6602*
PNP
MPS6651
MPS6652*

Voltage and current are negative
for PNP transistors

*Motorola Preferred Device



CASE 29–04, STYLE 1
TO–92 (TO–226AA)

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (Continued)


Characteristic	Symbol	Min	Max	Unit
ON CHARACTERISTICS				
DC Current Gain (I _C = 100 mAdc, V _{CE} = 1.0 Vdc) (I _C = 500 mAdc, V _{CE} = 1.0 Vdc) (I _C = 1000 mAdc, V _{CE} = 1.0 Vdc)	h _{FE}	50 50 30	— — —	—
Collector–Emitter Saturation Voltage (I _C = 1000 mAdc, I _B = 100 mAdc)	V _{CE(sat)}	—	0.6	Vdc
Base–Emitter On Voltage (I _C = 500 mAdc, V _{CE} = 1.0 Vdc)	V _{BE(on)}	—	1.2	Vdc

SMALL–SIGNAL CHARACTERISTICS

Current–Gain — Bandwidth Product (I _C = 50 mAdc, V _{CE} = 10 Vdc, f = 100 MHz)	f _T	100	—	MHz
Output Capacitance (V _{CB} = 10 Vdc, I _E = 0, f = 1.0 MHz)	C _{obo}	—	30	pF

SWITCHING CHARACTERISTICS

Delay Time	(V _{CC} = 40 Vdc, I _C = 500 mAdc, I _{B1} = 50 mAdc, t _p ≥ 300 ns Duty Cycle)	t _d	—	25	ns
Rise Time		t _r	—	30	ns
Storage Time		t _s	—	250	ns
Fall Time		t _f	—	50	ns

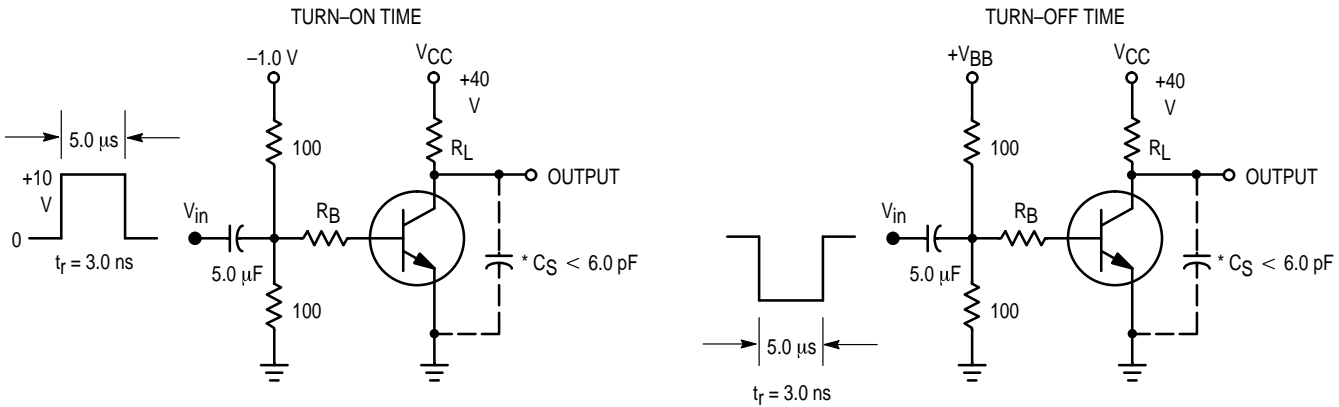

* Total Shunt Capacitance of Test Jig and Connectors
For PNP Test Circuits, Reverse All Voltage Polarities

Figure 1. Switching Time Test Circuits

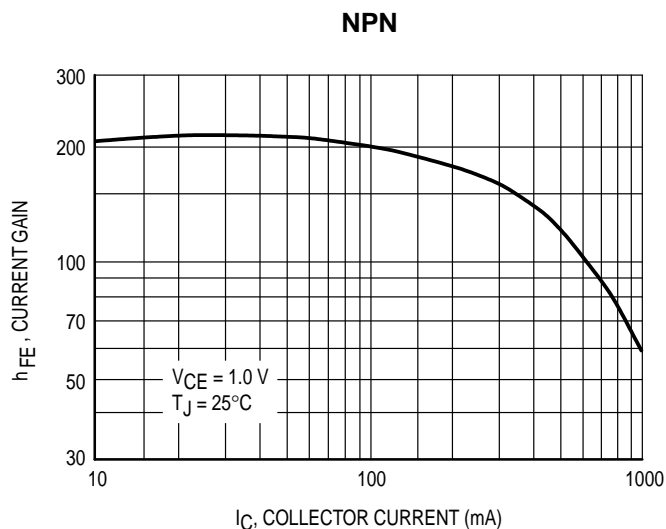


Figure 2. MPS6601/6602 DC Current Gain

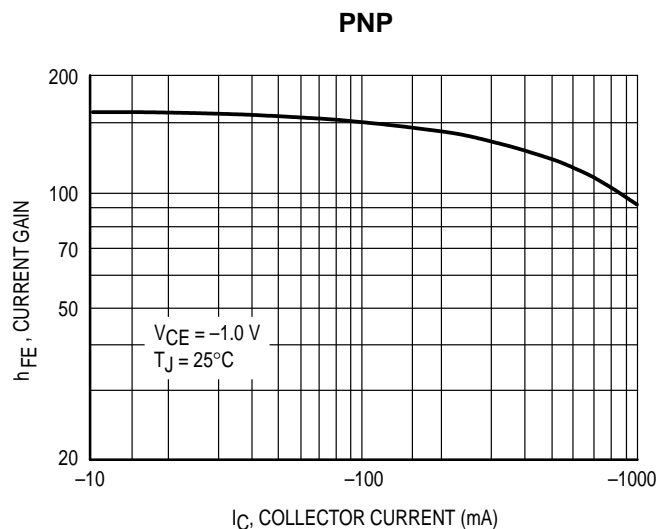


Figure 3. MPS6651/6652 DC Current Gain

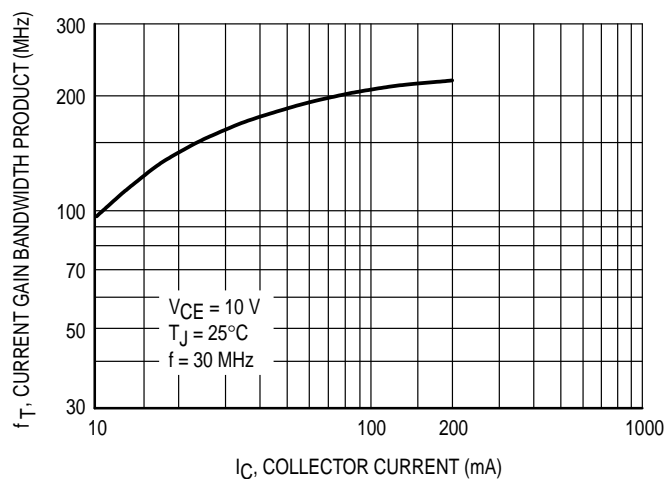


Figure 4. Current Gain Bandwidth Product

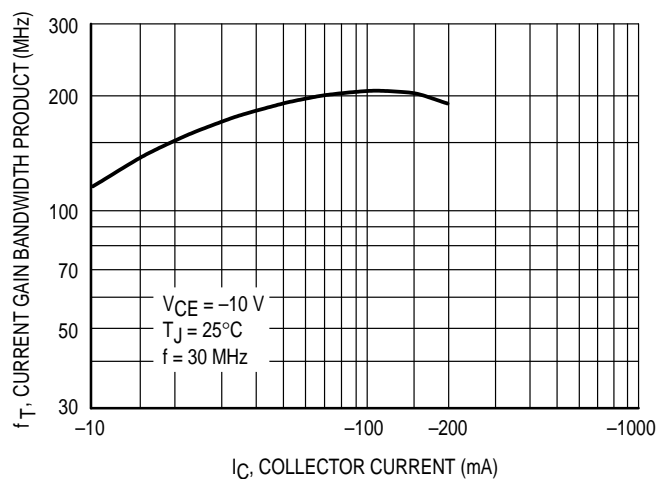


Figure 5. Current Gain Bandwidth Product

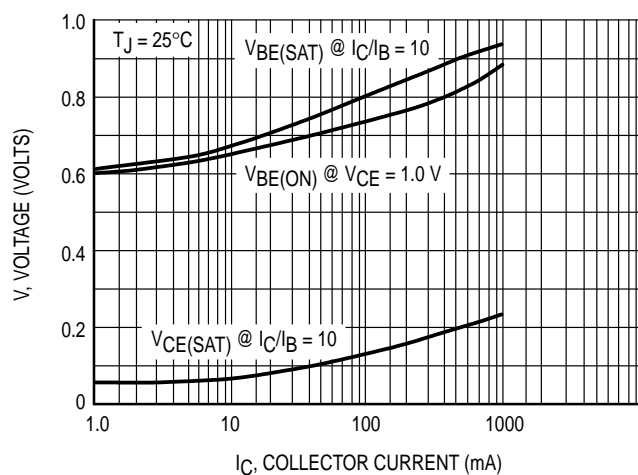


Figure 6. On Voltages

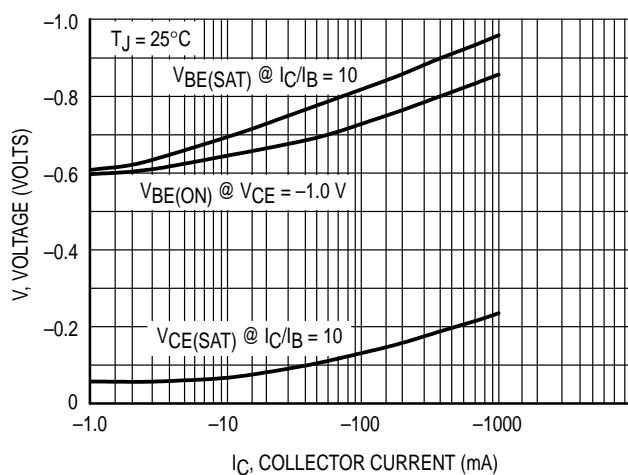


Figure 7. On Voltages

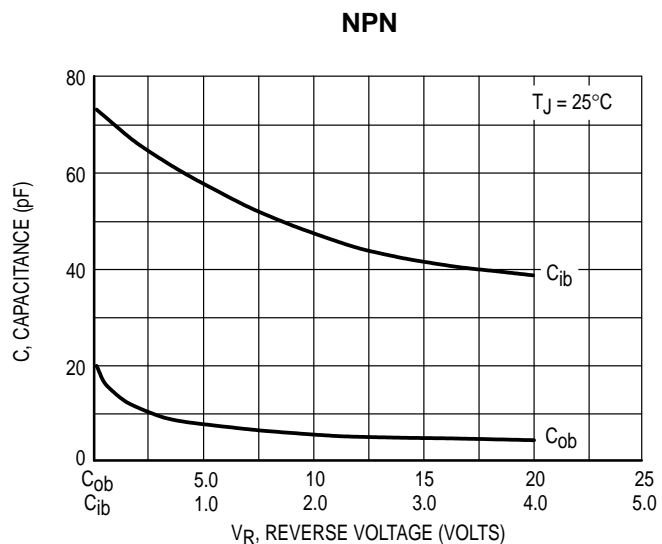


Figure 8. Capacitance

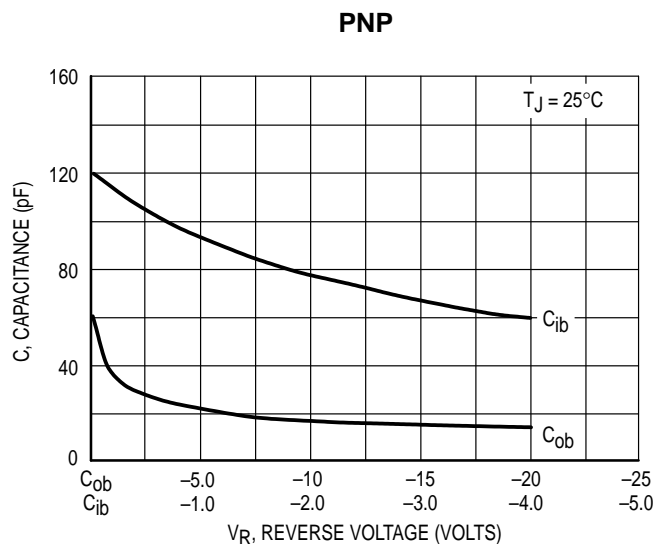


Figure 9. Capacitance

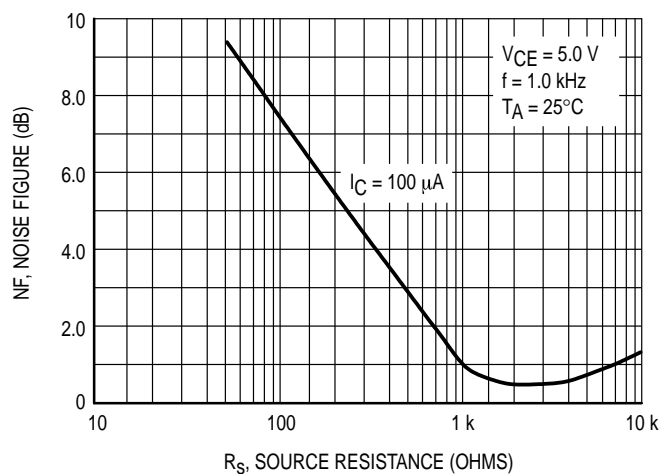


Figure 10. MPS6601/6602 Noise Figure

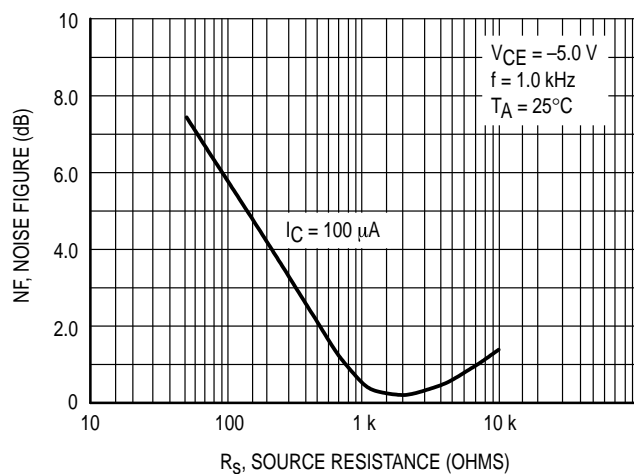


Figure 11. MPS6651/6652 Noise Figure

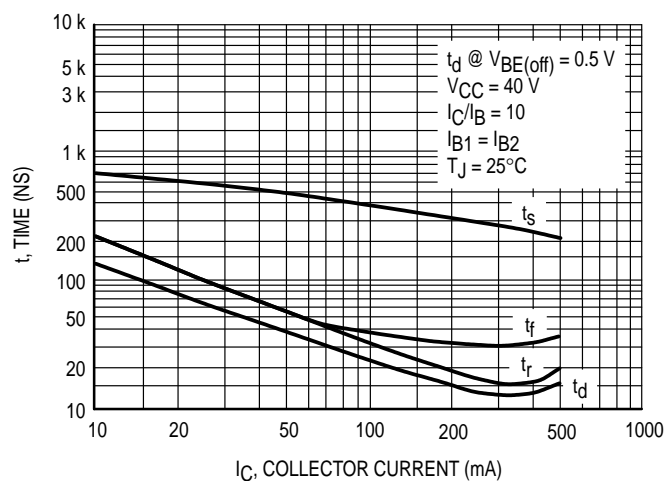


Figure 12. MPS6601/6602 Switching Times

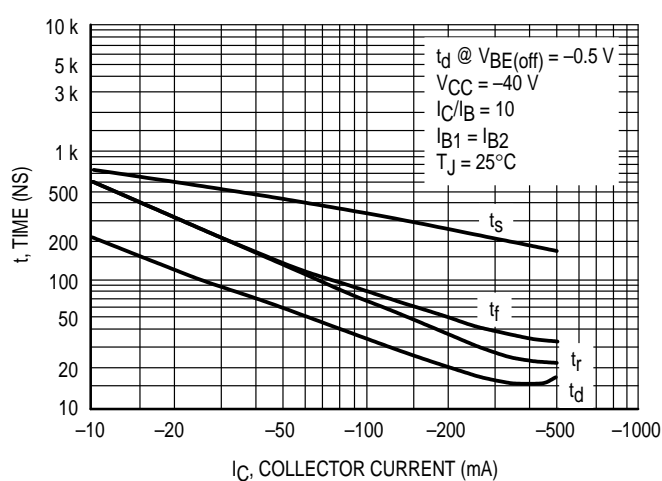


Figure 13. MPS6651/6652 Switching Times

NPN

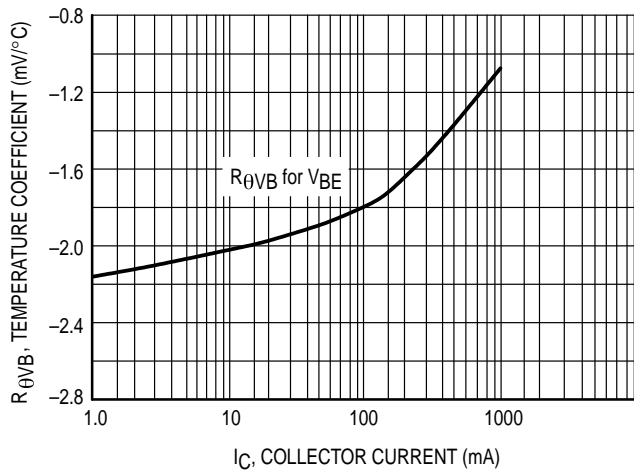


Figure 14. Base-Emitter Temperature Coefficient

PNP

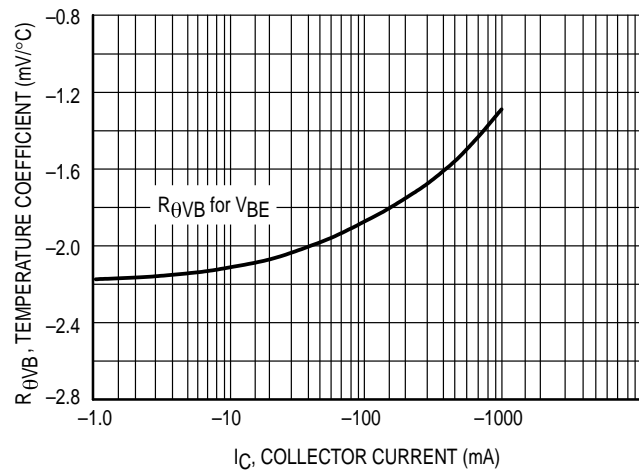


Figure 15. Base-Emitter Temperature Coefficient

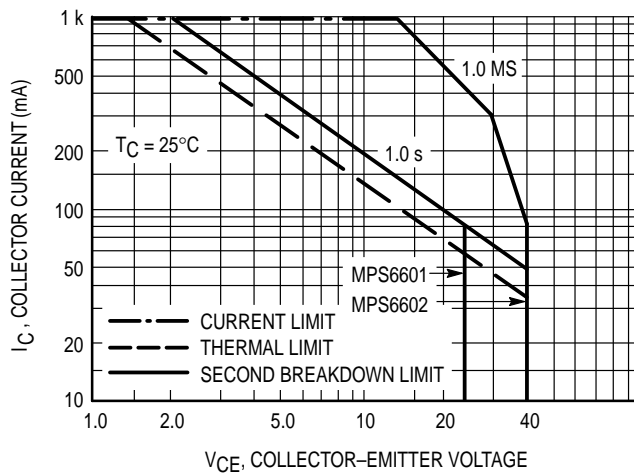


Figure 16. Safe Operating Area

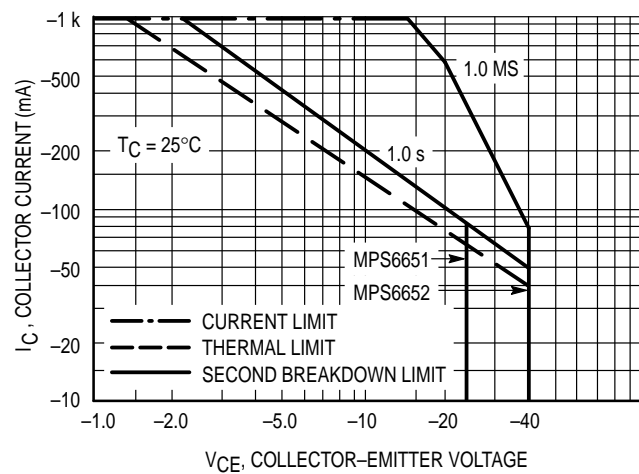


Figure 17. Safe Operating Area

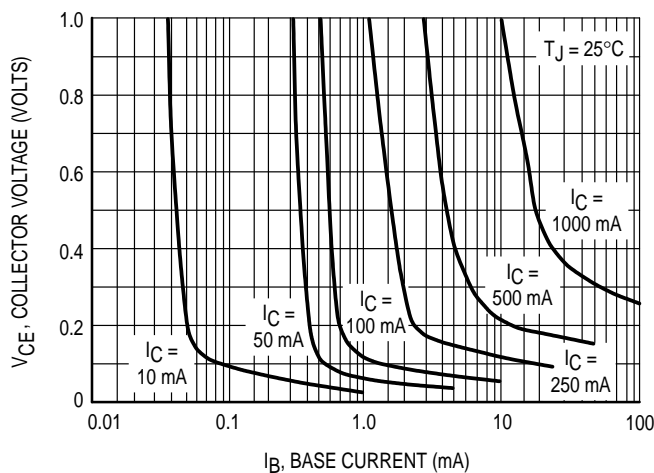


Figure 18. MPS6601/6602 Saturation Region

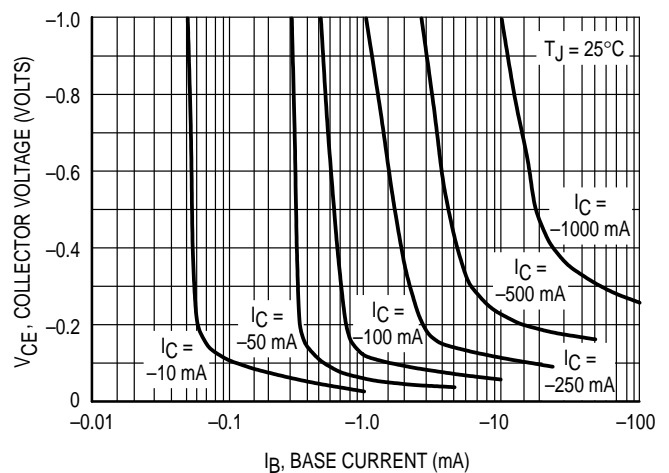


Figure 19. MPS6651/6652 Saturation Region



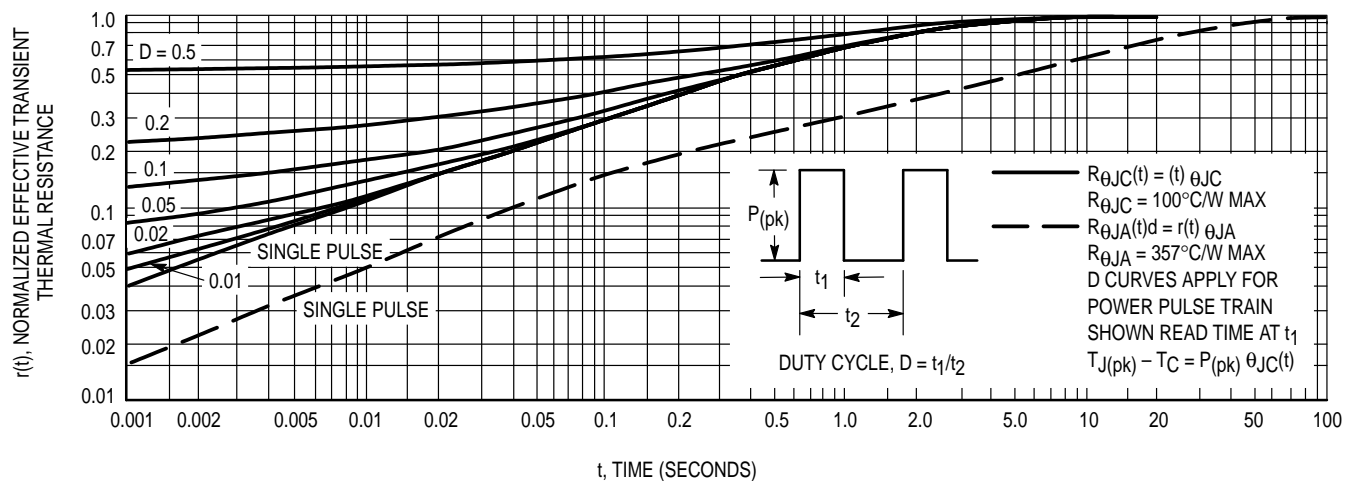


Figure 20. Thermal Response

PACKAGE DIMENSIONS

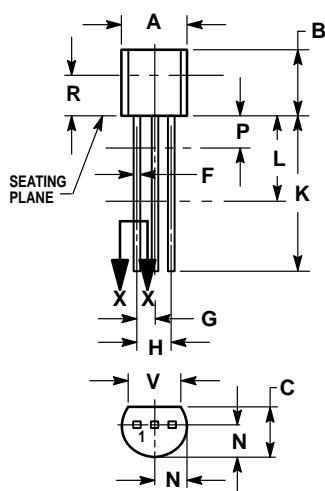

SECTION X-X

**CASE 029-04
(TO-226AA)
ISSUE AD**


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. DIMENSION F APPLIES BETWEEN P AND L. DIMENSION D AND J APPLY BETWEEN L AND K. MINIMUM LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.022	0.41	0.55
F	0.016	0.019	0.41	0.48
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	—	12.70	—
L	0.250	—	6.35	—
N	0.080	0.105	2.04	2.66
P	—	0.100	—	2.54
R	0.115	—	2.93	—
V	0.135	—	3.43	—

STYLE 1:

1. EMITTER
2. BASE
3. COLLECTOR

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447 or 602-303-5454

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE 602-244-6609
INTERNET: <http://Design-NET.com>

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,
3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-81-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

