

CLC5957

12-Bit, 70 MSPS Broadband Monolithic A/D Converter

General Description

The CLC5957 is a monolithic 12-bit, 70MSPS analog-to-digital converter. The device has been optimized for use in IF-sampled digital receivers and other applications where high resolution, high sampling rate, wide dynamic range, low power dissipation, and compact size are required. The CLC5957 features differential analog inputs, low jitter differential universal clock inputs, a low distortion track-and-hold with 0-300MHz input bandwidth, a bandgap voltage reference, data valid clock output, TTL compatible CMOS (3.3V or 2.5V) programmable output logic, and a proprietary 12-bit multi-stage quantizer. The CLC5957 is fabricated on the ABIC-V 0.8 micron BiCMOS process.

The CLC5957 features a 74dBc spurious free dynamic range (SFDR) and a 67dB signal to noise ratio (SNR). The wideband track-and-hold allows sampling of IF signals to greater than 250MHz. The part produces two-tone, dithered, SFDR of 83dBFS at 75MHz input frequency. The differential analog input provides excellent common mode rejection, while the differential universal clock inputs minimize jitter. The 48-pin TSSOP package provides an extremely small footprint for applications where space is a critical consideration. The CLC5957 operates from a single +5V power supply. Operation over the industrial temperature range of -40°C to +85°C is guaranteed. National Semiconductor tests each part to verify compliance with the guaranteed specifications.

Features

- 70MSPS
- Wide dynamic range:
 - SFDR: 74dBc
 - SFDR with dither: 85dBFS
 - SNR: 67dB
- IF sampling capability
- Input bandwidth = 0-300MHz
- Low power dissipation: 640mW
- Very small package: 48-pin TSSOP
- Single +5V supply
- Data valid clock output
- Programmable output levels: 3.3V or 2.5V


Applications

- Cellular base stations
- Digital communications
- Infrared/CCD imaging
- IF sampling
- Electro-optics
- Instrumentation
- Medical imaging
- High definition video




01502928

Block Diagram

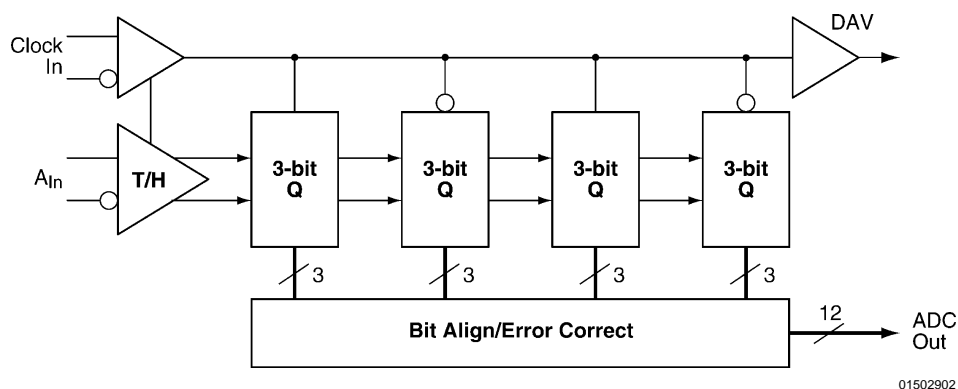

01502902

Pin Configuration

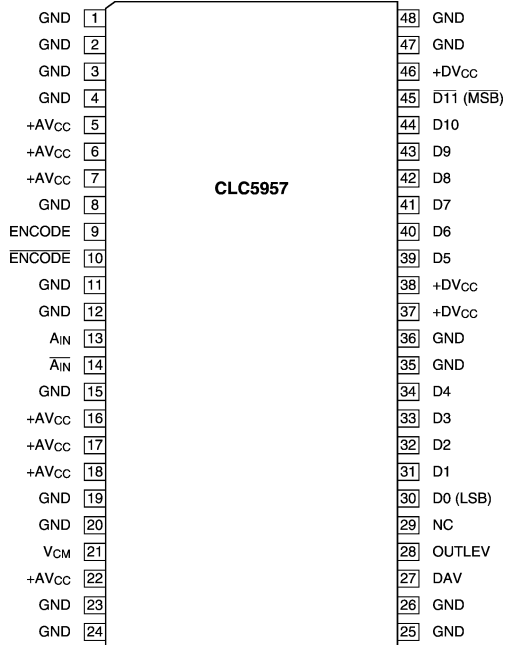

01502901

Ordering Information

| | |
|--------------|---------------------------|
| CLC5957MTD | 48-Pin TSSOP |
| CLC5957MTDX | 48-Pin TSSOP (Taped Reel) |
| CLC5957PCASM | Evaluation Board |

Pin Descriptions

| Pin Name | Pin No. | Description |
|------------------------------------|--|--|
| A _{IN} A _{IN} | 13, 14 | Differential input with a common mode voltage of +2.4V. The ADC full scale input is 1.024 V _{PP} on each of the complimentary input signals. |
| ENCODE ENCODE | 9, 10 | Differential clock where ENCODE initiates a new data conversion cycle on each rising edge. Logic for these inputs are a 50% duty cycle universal differential signal (>200mV). The clock input is internally biased to V _{CC} /2 with a termination impedance of 2.5kΩ. |
| V _{CM} | 21 | Internal common mode voltage reference. Nominally +2.4V. Can be used for the input common mode voltage. This voltage is derived from an internal bandgap reference. V _{CM} should be buffered when driving any external load. Failure to buffer this signal can cause errors in the internal bias currents. |
| D0–D11 | 30–34, 39–45 | Digital data outputs are CMOS and TTL compatible. D0 is the LSB and D11 is the MSB. MSB is inverted. Output coding is two's complement. Current limited to source/sink 2.5mA typical. |
| GND | 1–4, 8, 11, 12, 15, 19, 20, 23–26, 35, 36, 47, 48 | Circuit ground. |
| +AV _{CC} | 5–7, 16–18, 22 | +5V power supply for the analog section. Bypass to ground with a 0.1 μF capacitor. |
| +DV _{CC} | 37, 38, 46 | +5V power supply for the digital section. Bypass to ground with a 0.1 μF capacitor. |
| NC | 29 | No connect. May be left open or grounded. |
| DAV | 27 | Data Valid Clock. Data is valid on rising edge. Current limited to source/sink 5mA typical. |
| OUTLEV | 28 | Output Logic 3.3V or 2.5V option. Open = 3.3V, GND = 2.5V. |

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|---|---------------------|
| Positive Supply Voltage (V_{CC}) | -0.5V to +6V |
| Differential Voltage between any two Grounds | <100 mV |
| Analog Input Voltage Range | GND to V_{CC} |
| Digital Input Voltage Range | -0.5V to + V_{CC} |
| Output Short Circuit Duration (one-pin to ground) | Infinite |
| Junction Temperature (Note 7) | 175°C |
| Storage Temperature Range | -65°C to +150°C |
| Lead Solder Duration (+300°C) | 10 sec. |
| ESD tolerance | |
| human body model | 2000V |
| machine model | 200V |

Recommended Operating Conditions

| | |
|--------------------------------------|----------------------|
| Positive Supply Voltage (V_{CC}) | +5V \pm 5% |
| Analog Input Voltage Range | 2.048 V_{PP} diff. |
| Operating Temperature Range | -40°C to +85°C |

Package Thermal Resistance (Note 7)

| Package | θ_{JA} | θ_{JC} |
|--------------|---------------|---------------|
| 48-Pin TSSOP | 56°C/W | 16°C/W |

Reliability Information

| | |
|------------------|------|
| Transistor Count | 5000 |
|------------------|------|

Converter Electrical Characteristics

The following specifications apply for $AV_{CC} = DV_{CC} = +5V$, 66MSPS. **Boldface limits apply for $T_A = T_{min} = -40^\circ C$ to $T_{max} = +85^\circ C$** , all other limits $T_A = 25^\circ C$ (Note 3).

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|------------------------------------|--|---|------------|------------|-----------|---------|
| DYNAMIC PERFORMANCE | | | | | | |
| BW | Large-Signal Bandwidth | $A_{IN} = -3$ dBFS | | 300 | | MHz |
| | Overvoltage Recovery Time | $A_{IN} = 1.5$ FS (0.01%) | | 12 | | ns |
| t_A | Effective Aperture Delay | | | -0.41 | | ns |
| t_{AJ} | Aperture Jitter | | | 0.3 | | ps(rms) |
| NOISE AND DISTORTION | | | | | | |
| SNR *(Note 2) | Signal-to-Noise Ratio (without 50 harmonics) | $f_{IN} = 5$ MHz, $A_{IN} = -1$ dBFS | | 67 | | dBFS |
| | | $f_{IN} = 25$ MHz, $A_{IN} = -1$ dBFS* | 60 | 66 | | dBFS |
| | | $f_{IN} = 75$ MHz, $A_{IN} = -3$ dBFS | | 65 | | dBFS |
| | | $f_{IN} = 150$ MHz, $A_{IN} = -15$ dBFS | | 66 | | dBFS |
| | | $f_{IN} = 250$ MHz, $A_{IN} = -15$ dBFS | | 66 | | dBFS |
| SFDR | Spurious-Free Dynamic Range | $f_{IN} = 5$ MHz, $A_{IN} = -1$ dBFS | | 74 | | dBc |
| | | $f_{IN} = 25$ MHz, $A_{IN} = -1$ dBFS* | 60 | 74 | | dBc |
| | | $f_{IN} = 75$ MHz, $A_{IN} = -3$ dBFS | | 72 | | dBc |
| | | $f_{IN} = 150$ MHz, $A_{IN} = -15$ dBFS | | 69 | | dBc |
| | | $f_{IN} = 250$ MHz, $A_{IN} = -15$ dBFS | | 65 | | dBc |
| | Spurious-Free Dynamic Range (dithered) | $f_{IN} = 19$ MHz, $A_{IN} = -6$ dBFS | | 85 | | dBFS |
| IMD | Intermodulation Distortion | $f_{IN1} = 149.84$ MHz, $f_{IN2} = 149.7$ MHz, $A_{IN} = -10$ dBFS | | 68 | | dBFS |
| | | $f_{IN1} = 249.86$ MHz, $f_{IN2} = 249.69$ MHz, $A_{IN} = -10$ dBFS | | 58 | | dBFS |
| | Intermodulation Distortion (dithered) | $f_{IN1} = 74$ MHz, $f_{IN2} = 75$ MHz, $A_{IN} = -12$ dBFS | | 83 | | dBFS |
| DC ACCURACY AND PERFORMANCE | | | | | | |
| DNL | Differential Non-Linearity | $f_{IN} = 5$ MHz, $A_{IN} = -1$ dBFS | | ± 0.65 | | LSB |
| INL | Integral Non-Linearity | $f_{IN} = 5$ MHz, $A_{IN} = -1$ dBFS | | ± 1.5 | | LSB |
| | Offset Error (Note 2) | | -30 | 0 | 30 | mV |
| | Gain Error | | | 1.2 | | % FS |
| V_{REF} | Reference Voltage (Note 2) | | 2.2 | 2.37 | 2.6 | V |
| | No Missing Codes (Note 2) | $f_{IN} = 5$ MHz, $A_{IN} = -1$ dBFS | Guaranteed | | | |

Converter Electrical Characteristics (Continued)

The following specifications apply for $AV_{CC} = DV_{CC} = +5V$, 66MSPS. **Boldface limits apply for $T_A = T_{min} = -40^{\circ}C$ to $T_{max} = +85^{\circ}C$** , all other limits $T_A = 25^{\circ}C$ (Note 3).

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|---------------------------|---|-------------------|---------------------|-------|------|-----------------|
| ANALOG INPUTS | | | | | | |
| V _{IN} | Analog Diff Input Voltage Range | | | 2.048 | | V _{PP} |
| R _{IN} (SE) | Analog Input Resistance (Single-Ended) | | | 500 | | Ω |
| R _{IN} (Diff) | Analog Input Resistance (Differential) | | | 1000 | | Ω |
| C _{IN} | Analog Input Capacitance (Single-ended) | | | 2 | | pF |
| ENCODE INPUTS (UNIVERSAL) | | | | | | |
| V _{IH} | Logic Input High Voltage (Note 4),(Note 5) | | | | 5 | V |
| V _{IL} | Logic Input Low Voltage(Note 4),(Note 5) | | 0 | | | V |
| | Differential Input Swing (Note 4),(Note 5) | | 0.2 | | | V |
| DIGITAL OUTPUTS | | | | | | |
| V _{OL} | Logic Output Low Voltage (Note 2) | | | 0.01 | 0.4 | V |
| V _{OH} | Logic Output High Voltage (Note 2) | OUTLEV = 1 (open) | 3.2 | 3.5 | 3.8 | V |
| | | OUTLEV = 0 (GND) | 2.4 | 2.7 | 3.0 | V |
| TIMING (Note 6) | | | | | | |
| | Maximum Conversion Rate (ENCODE) (Note 2) | | 70 | 75 | | MSPS |
| | Minimum Conversion Rate (ENCODE) | | | 10 | | MSPS |
| t _P | Pulse Width High (ENCODE) (Note 4) | 50% threshold | 7.1 | | | ns |
| t _M | Pulse Width Low (ENCODE) (Note 4) | 50% threshold | 7.1 | | | ns |
| t _{DNV} | ENCODE falling edge to DATA not valid (Note 4) | | 8.3 | | | ns |
| t _{DGV} | ENCODE falling edge to DATA guaranteed valid (Note 4) | | | | 17.8 | ns |
| t _{DAV} | Rising ENCODE to rising DAV delay (Note 4) | 50% threshold | 8.3 | | 12.6 | ns |
| t _S | DATA setup time before rising DAV (Note 4) | | t _M -2.4 | | | ns |
| t _H | DATA hold time after rising DAV (Note 4) | | t _P -1.6 | | | ns |
| | Pipeline latency | | | | 3.0 | clk cycle |

Converter Electrical Characteristics (Continued)

The following specifications apply for $AV_{CC} = DV_{CC} = +5V$, 66MSPS. **Boldface limits apply for $T_A = T_{min} = -40^{\circ}C$ to $T_{max} = +85^{\circ}C$** , all other limits $T_A = 25^{\circ}C$ (Note 3).

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|---------------------------|---|------------|-----|-----|------------|-------|
| POWER REQUIREMENTS | | | | | | |
| I_{CC} | Total Operating Supply Current (Note 2) | | | 128 | 150 | mA |
| | Power Dissipation (Note 2) | | | 640 | 750 | mW |
| | Power Supply Rejection Ratio | | | 64 | | dB |

Note 1: "Absolute Maximum Ratings" are limiting values, to be applied individually, and beyond which the serviceability of the circuit may be impaired. Functional operability under any of these conditions is not necessarily implied. Exposure to maximum ratings for extended periods may affect device reliability.

Note 2: These parameters are guaranteed by test.

Note 3: Typical specifications are based on the mean test values of deliverable converters from the first three diffusion lots.


Note 4: Values guaranteed based on characterization and simulation.

Note 5: See page 14, Figure 3 for ENCODE inputs circuit.


Note 6: $C_L = 7pF$ DATA; $10pF$ DAV.

Note 7: The absolute maximum junction (T_{Jmax}) temperature for this device is $175^{\circ}C$. The maximum allowable power dissipation is dictated by T_{Jmax} , the junction-to-ambient thermal resistance (θ_{JA}), and the ambient temperature (T_A), and can be calculated using the formula $P_{Dmax} = (T_{Jmax} - T_A)/\theta_{JA}$. For the 48-pin TSSOP, θ_{JA} is $56^{\circ}C/W$, so $P_{Dmax} = 2.68W$ at $25^{\circ}C$ and $1.6W$ at the maximum operating ambient temperature of $85^{\circ}C$. Note that the power dissipation of this device under normal operation will typically be about 650 mW (640 mW quiescent power + 10 mW due to 1 TTL load on each digital output). The values of absolute maximum power dissipation will only be reached when the CLC5957 is operated in a severe fault condition (e.g., when input or output pins are driven beyond the power supply voltages, or the power supply polarity is reversed). Obviously, such conditions should always be avoided.


Typical Performance Characteristics ($A_{V_{CC}} = DV_{CC} = +5V$)

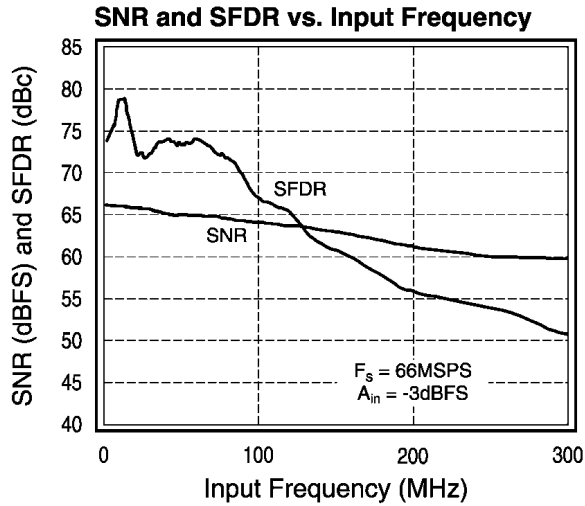


01502905

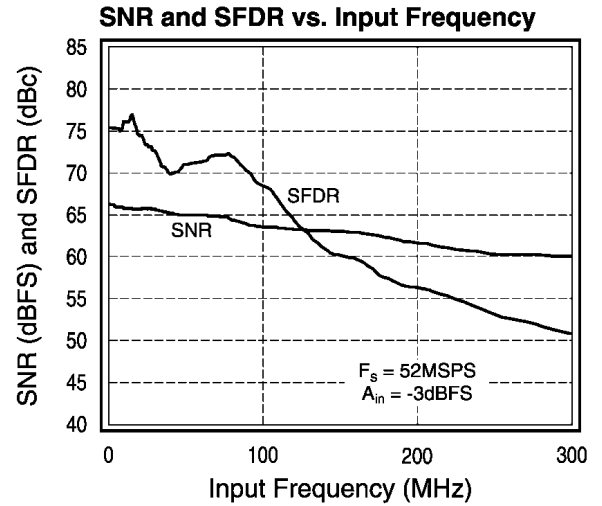


01502904

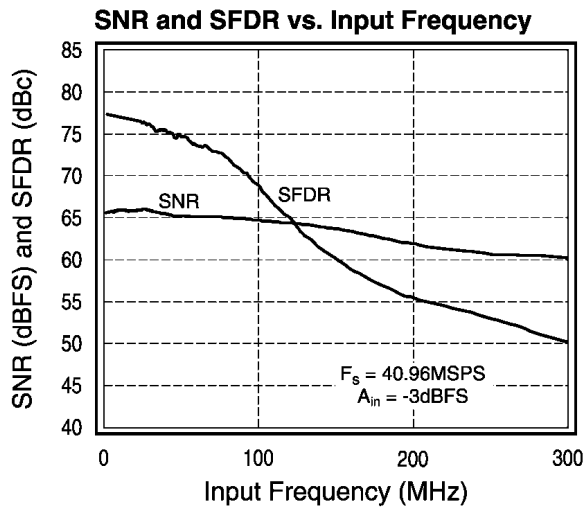


01502903

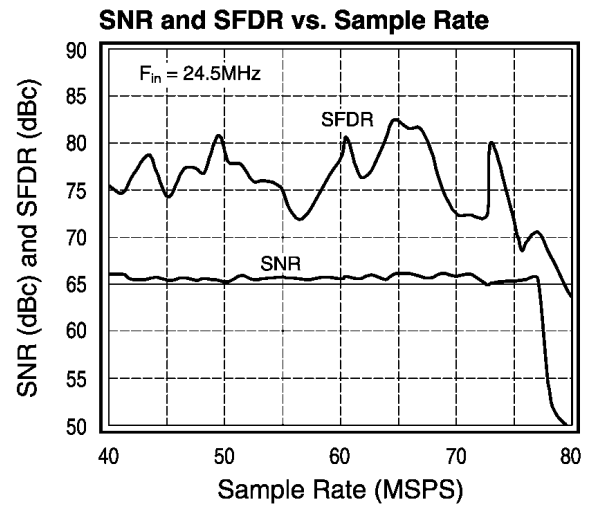

01502906

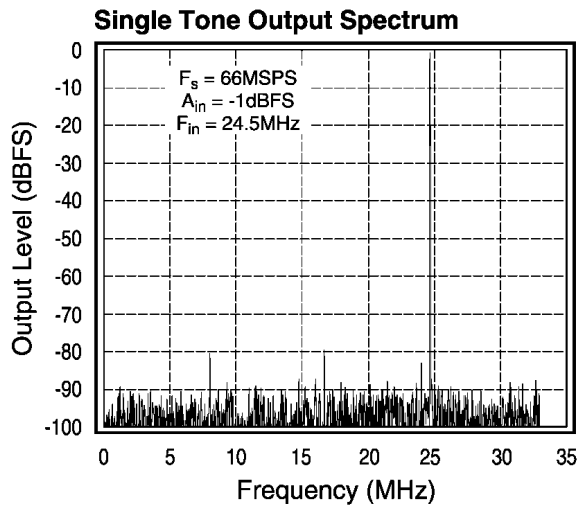


01502907

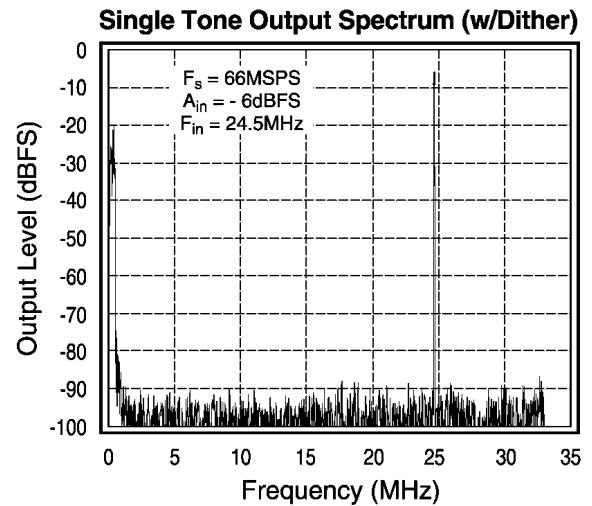

01502908


Typical Performance Characteristics (AV_{CC} = DV_{CC} = +5V) (Continued)

Differential Non-Linearity

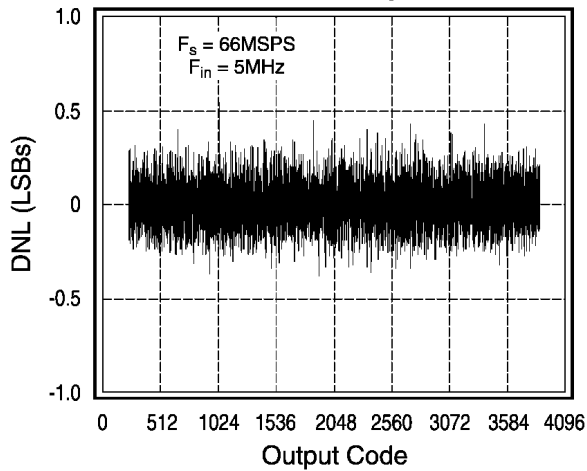


01502909

Integral Non-Linearity

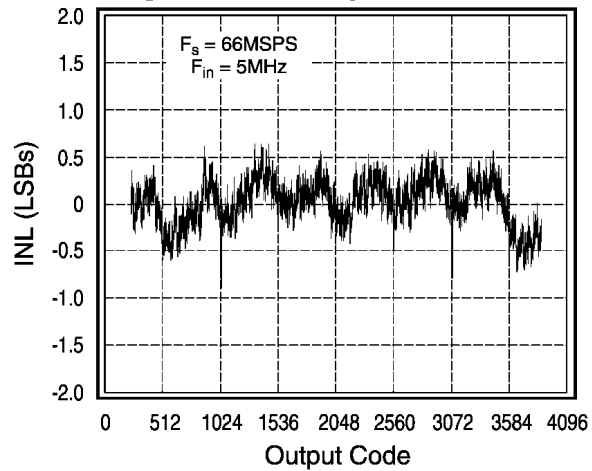


01502910

SNR and SFDR vs. Input Amplitude (w/o Dither)

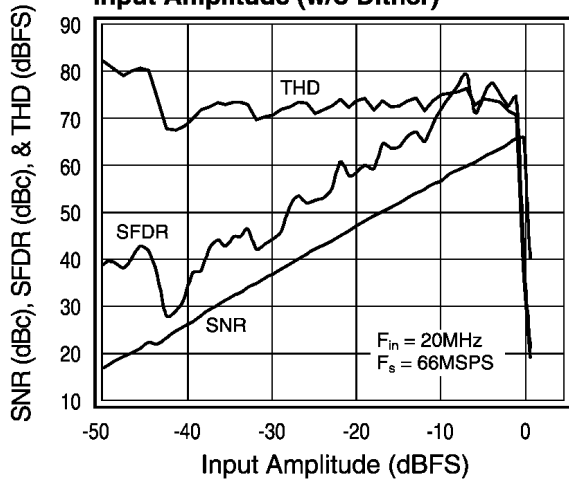


01502911

SNR and SFDR vs. Input Amplitude (w/Dither)

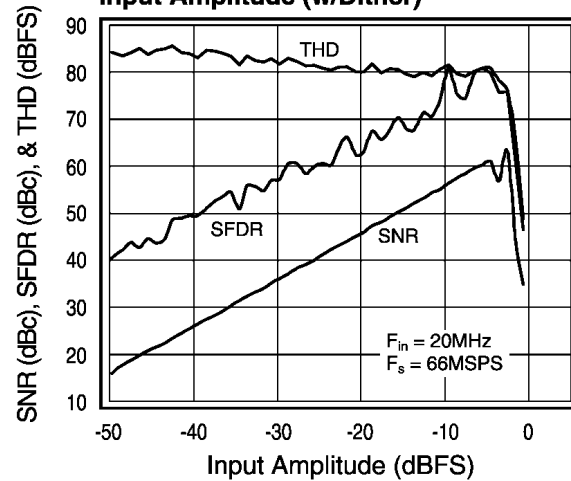


01502912

SNR and SFDR vs. Input Amplitude (w/o Dither)

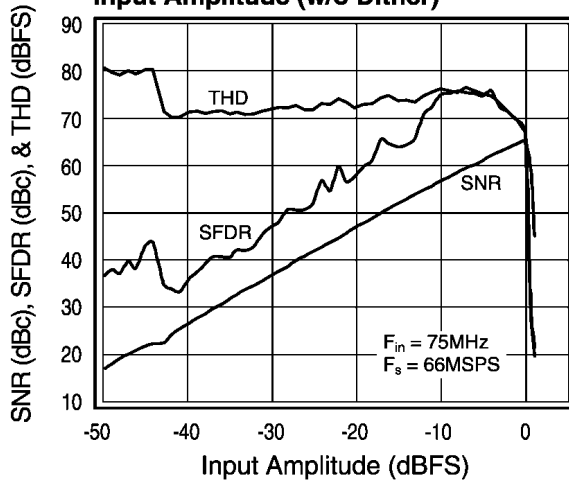


01502913

SNR and SFDR vs. Input Amplitude (w/o Dither)

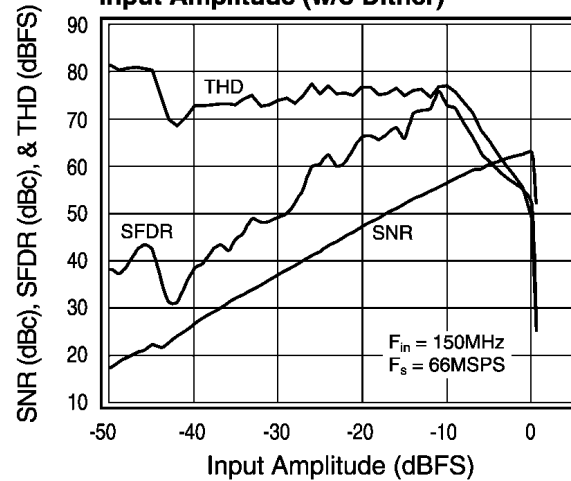


01502914


Typical Performance Characteristics ($AV_{CC} = DV_{CC} = +5V$) (Continued)

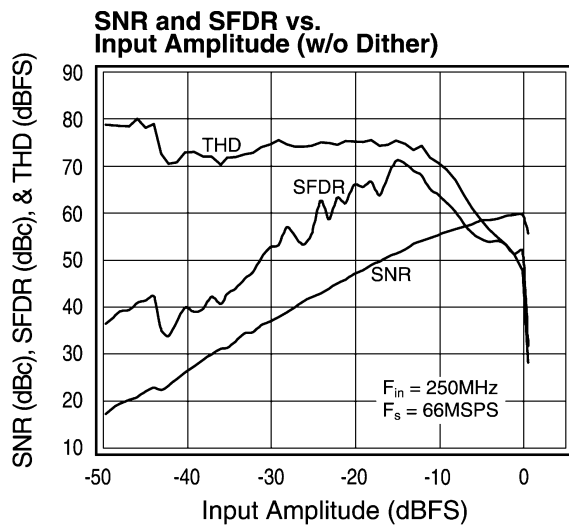


01502930

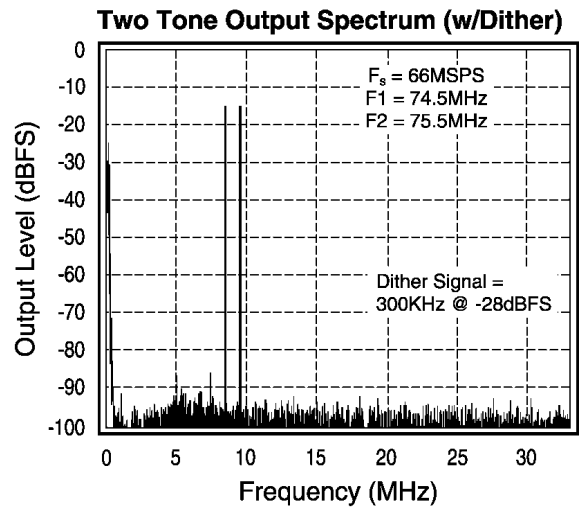

01502915

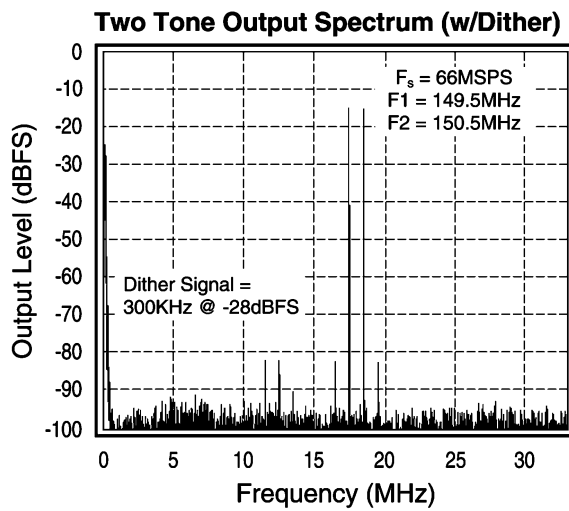


01502916

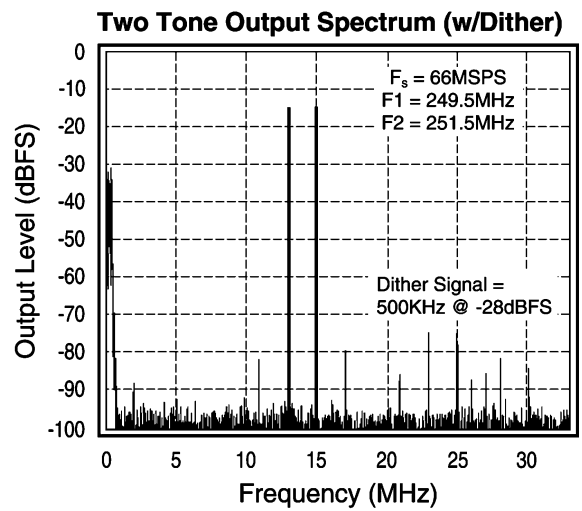


01502917

Timing Diagrams

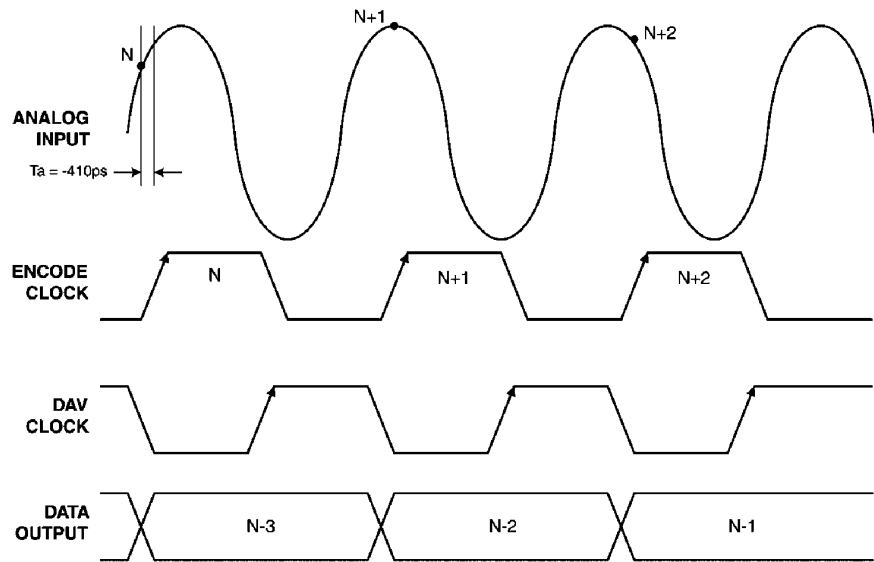


CLC5957 APERTURE DELAY Diagram

015029F8

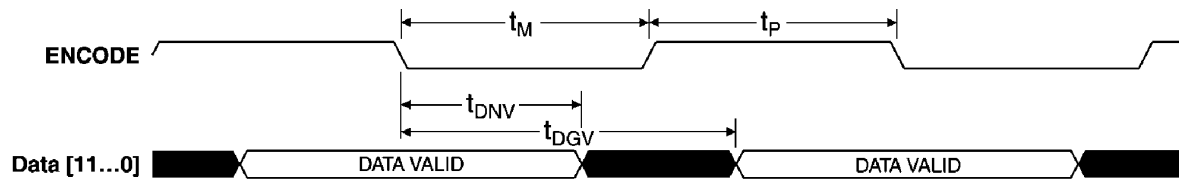


CLC5957 ENCODE to Data Timing Diagram

015029F9

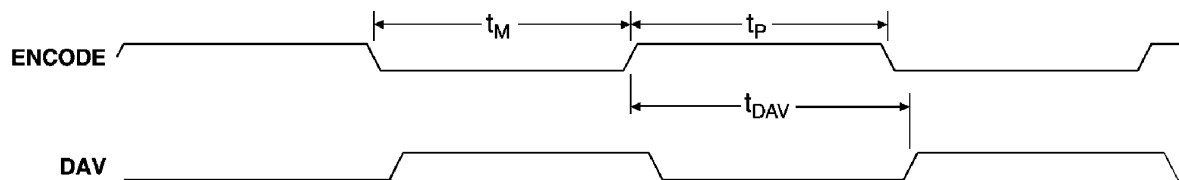

CLC5957 ENCODE to DAV Timing Diagram


015029H1

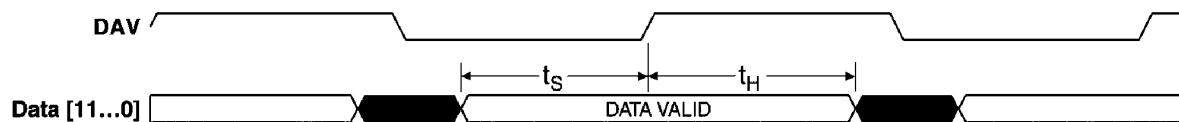


CLC5957 DAV to Data Timing Diagram

015029H2

Single IF Down Converter (Diversity Receiver Chipset)

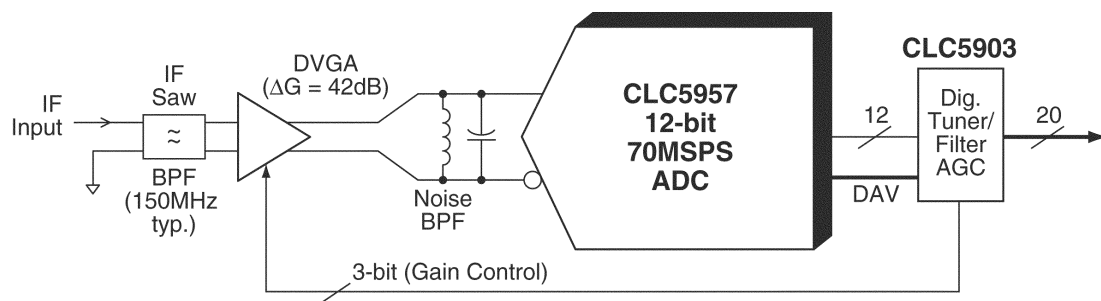


01502920

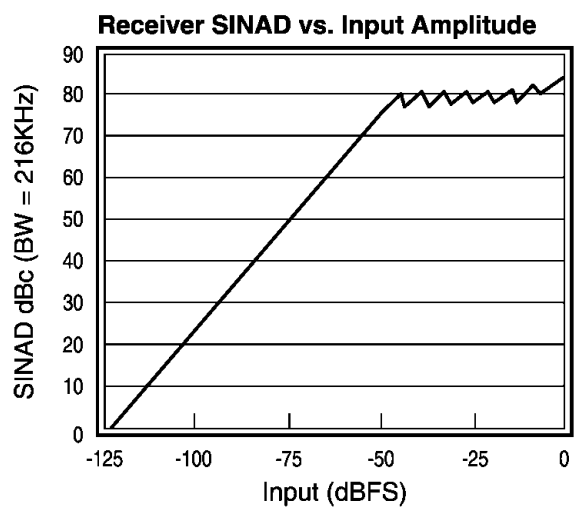

01502922

Evaluation Board

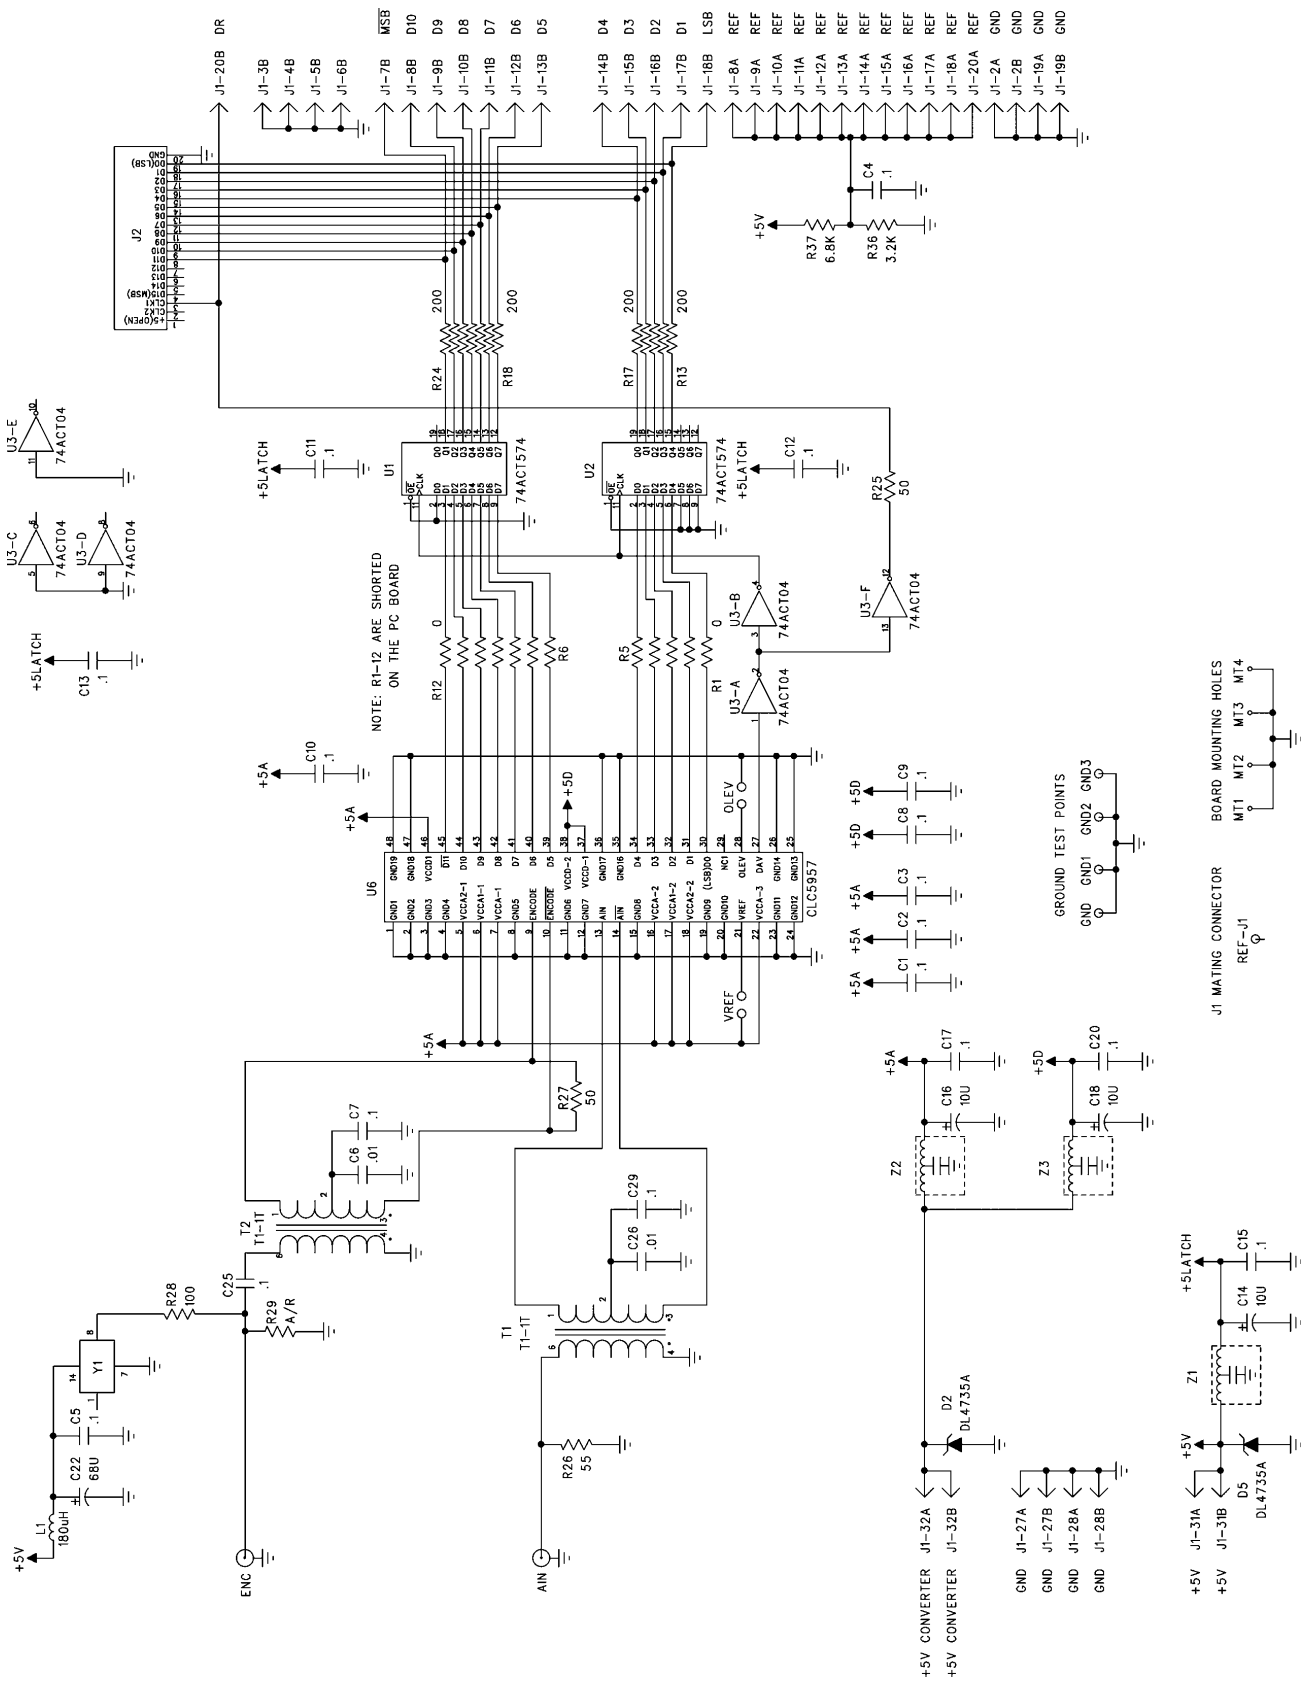


CLC5957

Evaluation Board Schematic


01502923

Evaluation Board (Continued)

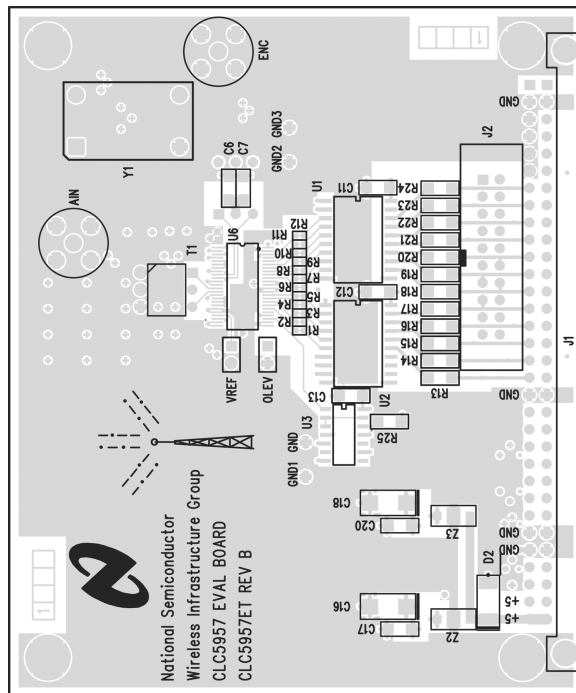

01502924


CLC5957PCASM Layer 1

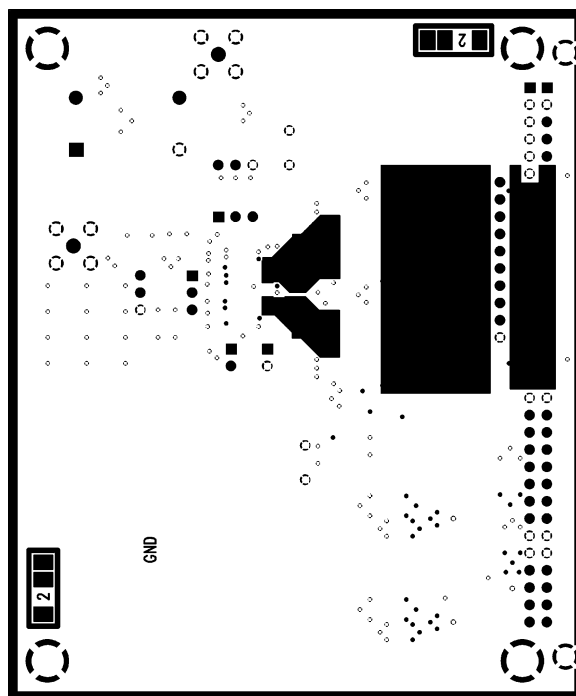

01502926


CLC5957PCASM Layer 2

Evaluation Board (Continued)

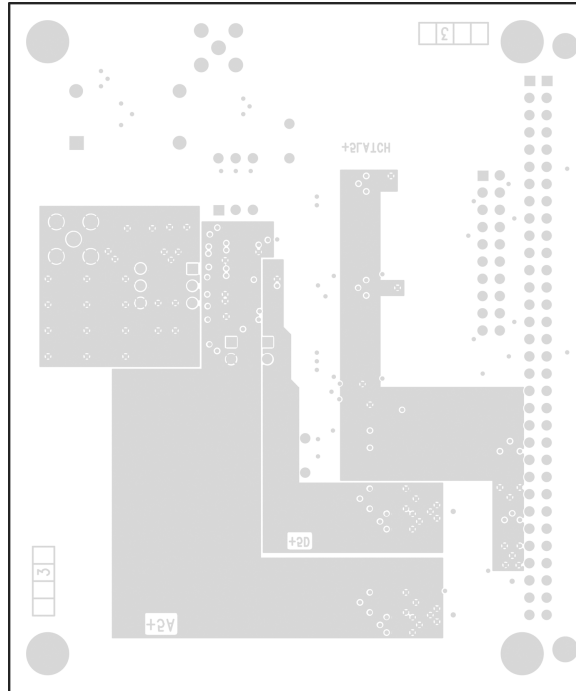

01502925

CLC5957PCASM Layer 3

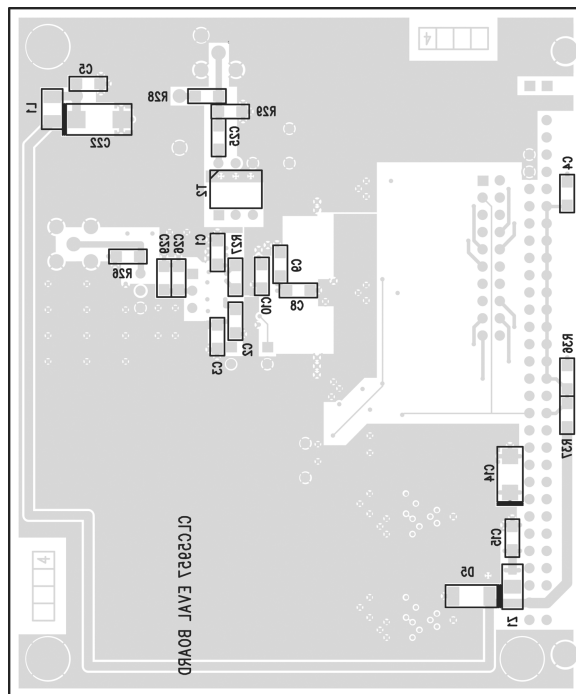


01502927

CLC5957PCASM Layer 4

CLC5957 Applications

Analog Inputs and Bias


Figure 1 depicts the analog input and bias scheme. Each of the differential analog inputs are internally biased to a nominal voltage of 2.40V DC through a 500Ω resistor to a low impedance buffer. This enables a simple interface to a broadband RF transformer with a center-tapped output winding that is decoupled to the analog ground. If the application requires the inputs to be DC coupled, the V_{CM} output can be used to establish the proper common-mode input voltage for the ADC. The V_{CM} voltage reference is generated from an internal bandgap source that is very accurate and stable.

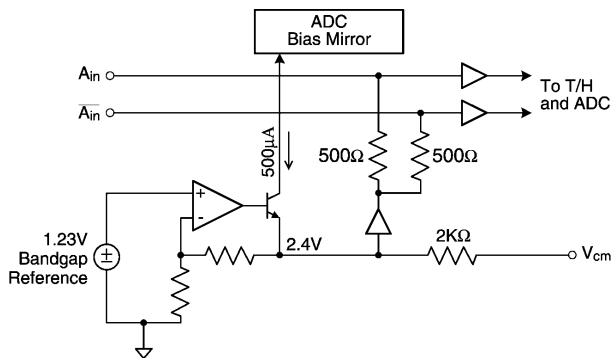

015029F1

FIGURE 1. CLC5957 Bias Scheme

The V_{CM} output may also be used to power down the ADC. When the V_{CM} pin is pulled above 3.5V, the internal bias mirror is disabled and the total current is reduced to less than 10mA. Figure 2 depicts how this function can be used. The diode is necessary to prevent the logic gate from altering the ADC bias value.

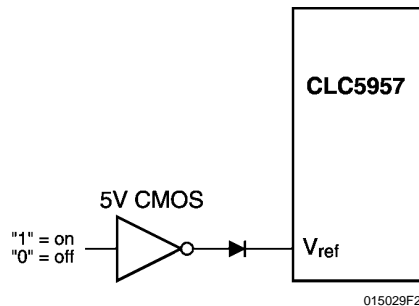


015029F2

FIGURE 2. Power Shutdown Scheme

ENCODE Clock Inputs


The CLC5957's differential input clock scheme is compatible with all commonly used clock sources. Although small differential and single-ended signals are adequate, for best aperture jitter performance a low noise differential clock with a high slew rate is preferred. As depicted in Figure 3, both ENCODE clock inputs are internally biased to $V_{CC}/2$ through a pair of 5kΩ resistors. The clock input buffer operates with any common-mode voltage between the supply and ground.

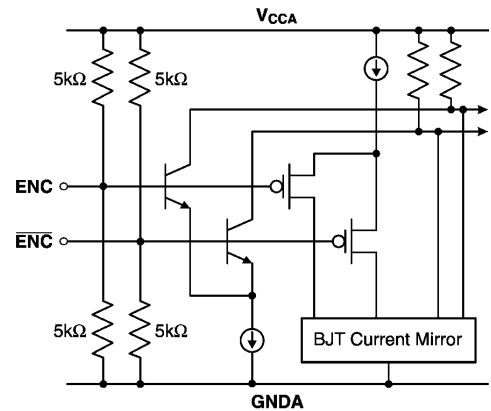

015029F3

FIGURE 3. CLC5957 ENCODE Clock Inputs


The internal bias resistors simplify the clock interface to another center-tapped transformer as depicted in Figure 4. A low phase noise, RF synthesizer of moderate amplitude (1 – 4V_{PP}) can drive the ADC through this interface.

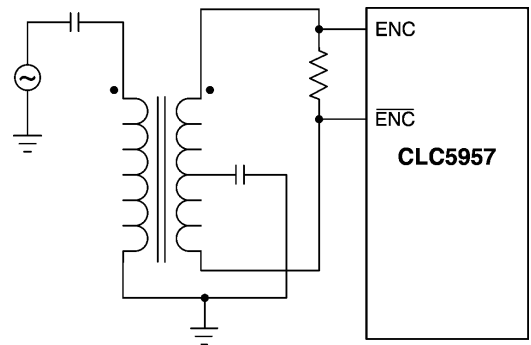

015029F4

FIGURE 4. Transformer Coupled Clock Scheme

Figure 5 shows the clock interface scheme for square wave clock sources.



015029F5

FIGURE 5. TTL, 3V CMOS or 5V CMOS Clock Scheme

CLC5957 Applications (Continued)

Digital Outputs and Level Select

Figure 6 depicts the digital output buffer and bias used in the CLC5957. Although each of the twelve output bits uses a controlled current buffer to limit supply transients, it is recommended that parasitic loading of the outputs is minimized. Because these output transients are harmonically related to the analog input signal, excessive loading will degrade ADC performance at some frequencies.

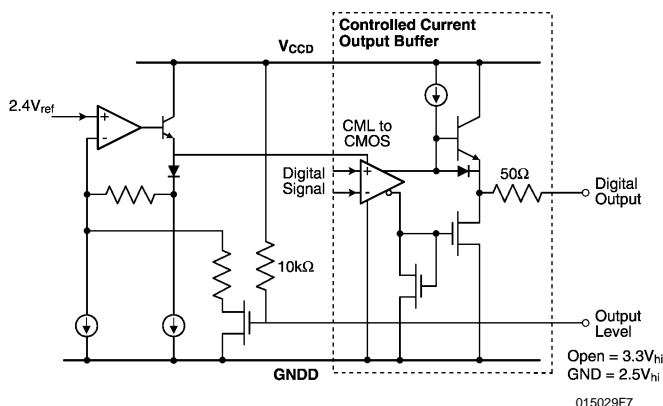


FIGURE 6. CLC5957 Digital Outputs

The logic high level is slaved to the internal 2.4V reference. The OUTLEV control pin selects either a 3.3V or 2.5V logic high level. An internal pull up resistor selects the 3.3V level as the default when the OUTLEV pin is left open. Grounding the OUTLEV pin selects the 2.5V logic high level.

To ease user interface to subsequent digital circuitry, the CLC5957 has a data valid clock output (DAV). In order to match delays over IC processing variables, this digital output also uses the same output buffer as the data bits. The DAV clock output is simply a delayed version of the ENCODE input clock. Since the ADC output data change is slaved to the falling edge of the ENCODE clock, the rising DAV clock edge occurs near the center of the data valid window (or eye) regardless of the sampling frequency.

Minimum Conversion Rate

This ADC is optimized for high-speed operation. The internal bipolar track and hold circuits will cause droop errors at low sample rates. The point at which these errors cause a degradation of performance is listed on the specification page as the minimum conversion rate. If a lower sample rate is desired, the ADC should be clocked at a higher rate, and the output data should be decimated. For example, to obtain a 10MSPS output, the ADC should be clocked at 20MHZ, and every other output sample should be used. No significant

power savings occurs at lower sample rates, since most of the power is used in analog circuits rather than digital circuits.

CLC5957 Evaluation Board

Description

The Evaluation board for the CLC5957 allows for easy test and evaluation of the product. The part may be ordered with all components loaded and tested. The order number is the CLC5957PCASM. The user supplies an analog input signal, encode signal and power to the board and is able to take latched 12-bit digital data out of the board.

ENCODE Input (ENC)

The ENCODE input is an SMA connector with a termination of 50Ω. The encode signal is converted to an AC coupled, differential clock signal centered between V_{CC} and ground. The user should supply a sinusoidal or square wave signal of $> 200mV_{PP}$ and $< 4 V_{PP}$ with a 50% duty cycle. The duty cycle can vary from 50% if the minimum clock pulse width times are observed. A low jitter source will be required for IF-sampled analog input signals to maintain best performance.

CLC5957 Clock Option

The CLC5957 evaluation board is configured for use with an optional crystal clock oscillator source. The component Y1 may be loaded with a 'Full-sized', HCMOS type, crystal oscillator.

Analog Input (AIN)

The analog input is an SMA connector with a 50Ω termination. The signal is converted from single to differential by a transformer with a 5 to 260MHz bandwidth and approximately one dB loss. Full scale is approximately 11dBm or $2.2V_{PP}$. It is recommended that the source for the analog input signal be low jitter, low noise and low distortion to allow for proper test and evaluation of the CLC5957.


Supply voltages (J1 pins 31 A&B and 32 A&B)

The CLC5957PCASM is powered from a single 5V supply connected from the referenced pins on the Eurocard connector. The recommended supplies are low noise linear supplies.

Digital Outputs (J1 pins 7B (\overline{MSB} , $\overline{D11}$) through 18B (LSB) and 20B (Data Valid))

The digital outputs are provided on the Eurocard connector. The outputs are buffered by 5V CMOS latches with 50Ω series output resistors. The rising edge of Data Valid may be used to clock the output data into data collection cards or logic analyzers. The board has a location for the HP 01650-63203 termination adapter for HP 16500 logic analyzers to simplify connection to the analyzer.

Physical Dimensions inches (millimeters) unless otherwise noted

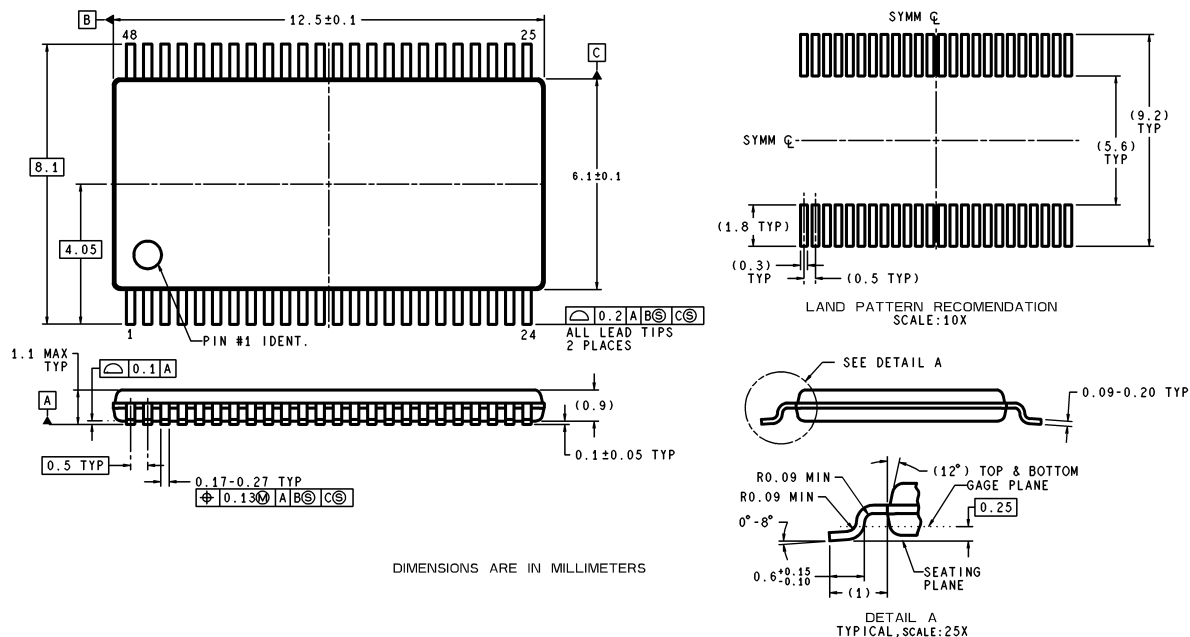

48-Lead TSSOP (Millimeters Only)
Order Number CLC5957MTD
NS Package Number MTD48

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
Americas
Email: support@nsc.com

www.national.com

National Semiconductor Europe

Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor Asia Pacific Customer Response Group

Tel: 65-2544466
Fax: 65-2504466
Email: ap.support@nsc.com

National Semiconductor Japan Ltd.

Tel: 81-3-5639-7560
Fax: 81-3-5639-7507