

Features

- Non-Isolated
- Synchronous rectification design
- Adjustable Output voltage
- 2, 3, 4AMP Adjustable Positive Step Down Integrated Switching Regulator
- Over load protection (125% full load typical)
- Remote ON/OFF Control(Ground Off)
- Wide Input Range
- Continuous short circuit protection (Very low short current $I_{in}<50mA$)
- Input voltage range 4.5V~28V
- Efficiency to 97%

INNOLINE
DC/DC-Converter

R-7xxxP_D Series

**2, 3, 4 AMP
SIP12
Vertical &
Horizontal**



Selection Guide

Part Number	Input Range	Nominal Output Voltage	Vout Adjust Range	Output Current	Efficiency (%)		
					Min. Vin	12V	Max. Vin
SIP12	(V)	(V)	(V)	(A)			
R-723.3x	4.5 – 28	3.3	2.5 – 5.5	2	95	93	89
R-725.0x	6.5 – 28	5.0	3.0 – 6.0	2	96	95	91
R-726.5x	8.5 – 28	6.5	5.0 – 8.0	2	97	96	93
R-729.0x	12 – 28	9.0	7.0 – 11	2	96	-	93
R-7212x	15 – 28	12	10 – 14	2	97	-	95
R-7215x	19 – 28	15	13 – 17	2	97	-	96
R-733.3x	4.5 – 28	3.3	2.5 – 5.5	3	94	93	89
R-735.0x	6.5 – 28	5.0	3.0 – 6.0	3	95	95	92
R-736.5x	8.5 – 28	6.5	5.0 – 8.0	3	97	96	93
R-739.0x	12 – 28	9.0	7.0 – 11	3	96	-	94
R-7312x	15 – 28	12	10 – 14	3	97	-	96
R-7315x	19 – 28	15	13 – 17	3	97	-	96
R-743.3x	4.5 – 28	3.3	2.5 – 5.5	4	93	92	88
R-745.0x	6.5 – 28	5.0	3.0 – 6.0	4	95	94	91
R-746.5x	8.5 – 28	6.5	5.0 – 7.5	4	96	96	93

Note: Vin-Vout ≥ 1.5V~4.0V depending on Vout if adjust function is used!

Suffix x: (see mechanical drawing for details)
x = P pins vertical through hole
x = D pins bent for horizontal through hole mounting

Description

The R-7XXX series is a high performance 2.5V to 15V , 2Amp to 4Amp,12-Pin SIP (single in-line package).Integrated switching regulator (ISR), Synchronous - rectified design yields excellent efficiencies up to 97%. Short circuit protection with crowbar function to reduce the short circuit current to under 50mA of input current.


Specifications (refer to the standard application circuit, Ta: 25°C)

Characteristics	Conditions	Min.	Typ.	Max.
Output Voltage Range	All Series	2.5		17V
Output Current	R-72xxP/D R-73xxP/D R-74xxP/D	0.2 0.3 0.4		2.0A 3.0A 4.0A
Output Current Limit	R-72xxP/D R-73xxP/D R-74xxP/D		2.5 3.75 5.0	3.0A 4.25A 5.5A
Short Circuit Input Current	All Series		50	100mA
Output Voltage Accuracy (At 100% Load)	All Series		±1%	±2%
Line Voltage Regulation (Vin = min. to max. at full load)	All Series		0.5	1.0%
Load Regulation (10 to 100% full load)	All Series		0.5	1.0%
Ripple & Noise	All Series		40mVp-p	70mVp-p
Transient Response (see note 1)	50% Load Change – Vout Over / Undershoot		100µS	200µs 100mV
Remote ON / OFF (see note 2)	Open or High (Power ON) Low (Power OFF)	4.5		28V 0.8V
Switching Frequency		270	300	330kHz
Shutdown current	ON / OFF Pin pulled low			100µA
Quiescent Current	Vin = min. to max. at 0% load			30mA
Operating Temperature Range		-40°C		+85°C
Operating Case Temperature				+110°C
Storage Temperature Range		-40°C		+125°C
Thermal Impedance	Natural Convection			25°C/W
Internal Power Dissipation	Ta < 60°C			1.4W
MTBF (Nominal Vout, 100% load)	Tamb. = +25°C Tamb. = +85°C			749kHrs 150kHrs

Notes:

- 1. Requires a 100µF electrolytic or tantalum output capacitor for proper operation in all applications (the capacitor to be placed as close as possible to the output pins).
- 2. ON / OFF pin driven by TTL (logic gate), open-collector bipolar transistor or open-drain MOSFET.

Standard Application Circuit

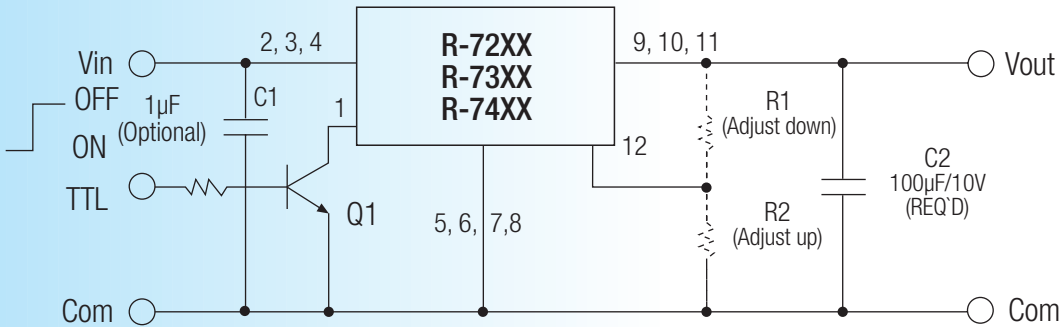

Output Current vs Input Voltage

How to calculating the max output current

The internal power dissipation(P_D)follows the equation:

$$P_D = I_o \times V_o \times (1-\eta)$$

$$I_o = P_D / V_o \times (1-\eta)$$

Where P_D = Internal power dissipation

I_o = Output current

V_o = Output voltage

η = Efficiency

Example: R-745.OP , at $V_{in} = 28V_{dc}$, $V_o = 5V_{dc}$, $\eta=91\%$ (see table 1)

(a) When $T_a = 60^{\circ}C$, $P_D = 1.4$ Watt (see fig-1)

$$I_o = 1.4(W) / 5(V) \times (1-0.91) = 3.11(A)$$


(b) When $T_a = 85^{\circ}C$, $P_D = 1$ Watt (see fig-1)

$$I_o = 1(W) / 5(V) \times (1-0.91) = 2.222(A)$$

(c) At $V_{in} = 12V_{dc}$ efficiency = 94% (see table 1)


When $T_a = 85^{\circ}C$, $P_D = 1$ Watt (see fig-1)

$$I_o = 1(W) / 5(V) \times (1-0.94) = 3.33(A)$$

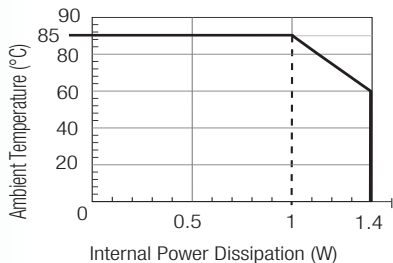


Characteristics


R-72xx / R-73xx
Ripple VS Vin

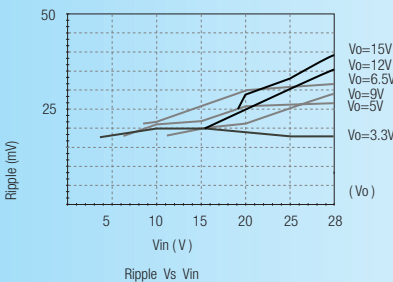


R-74xx
Ripple VS Vin

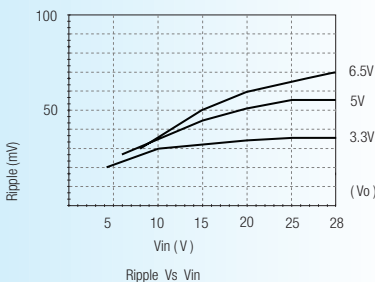


R-72xx / R-73xx
Efficiency VS Vin

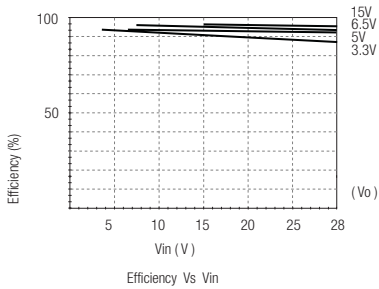


R-74xx
Efficiency VS Vin

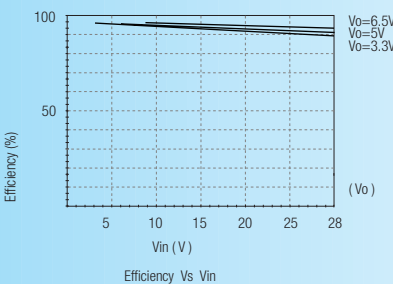

R-72xx / R-73xx / R-74xx
Efficiency / Load Vin=Min

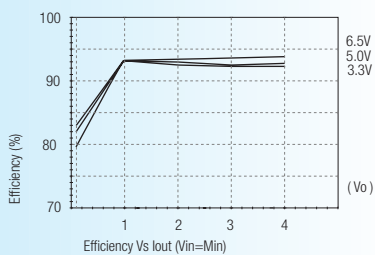


R-72xx / R-73xx / R-74xx
Efficiency / Load Vin=Max

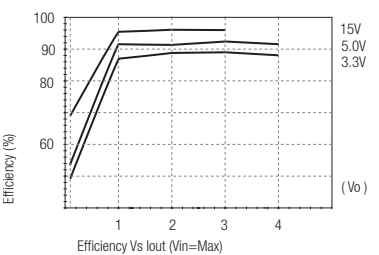

Package Style and Pinning (mm)

SIP12 PIN Package

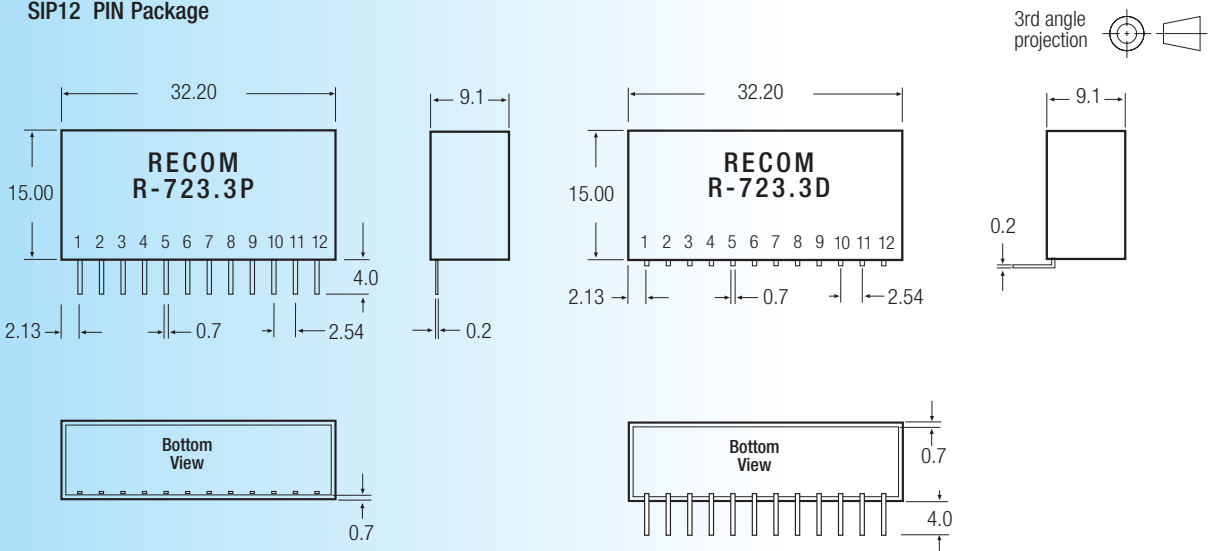

Pin Connections		
Pin #	Name	Description
1	ON / OFF	Input pin : Active low (less than 0.8V) to disable the device
2, 3, 4	Vin	Power input
5, 6, 7, 8	GND	Input and output ground (common)
9, 10, 11	Vout	Power output
12	Vout-Adj	With external resistors R1,R2 to selected output voltage

Tolerance: ± 0.25 mm

Table 1: Adjustment Resistor Values

2A DC	R-723.3P/D		R-725.0P/D		R-726.5P/D		R-729.0P/D		R-7212P/D		R-7215P/D	
3A DC	R-733.3P/D		R-735.0P/D		R-736.5P/D		R-739.0P/D		R-7312P/D		R-7315P/D	
4A DC	R-743.3P/D		R-745.0P/D		R-746.5P/D		-		-		-	
Vout (nominal)	3.3VDC		5.0VDC		6.5VDC		9.0VDC		12VDC		15VDC	
Vout (adj)	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2
2.5	8.5KΩ											
3.0	33KΩ		470Ω									
3.2	110KΩ		1.6KΩ									
3.3			2.2KΩ									
3.4		36KΩ	3.0KΩ									
3.6		11KΩ	4.7KΩ									
3.9		4.7KΩ	8.5KΩ									
4.5		1.6KΩ	30KΩ									
4.9		820Ω	220KΩ									
5.0		680Ω			11KΩ							
5.1		560Ω		28KΩ	12KΩ							
5.5		190Ω		2.6KΩ	20KΩ							
6.0					47KΩ							
6.5												
7.0					560Ω	13KΩ						
8.0					330Ω	31KΩ						
9.0												
10							2.2KΩ	20KΩ				
11							390Ω	47KΩ				
12												
13									2.4KΩ	36KΩ		
14									390Ω	76KΩ		
15												
16											2.6KΩ	
17											860Ω	
18												