

SANYO

No.3582

2SA1768/2SC4612

PNP/NPN Epitaxial Planar Silicon Transistors

High-Voltage Switching Applications

Applications

- Color TV sound output, converter, inverter

Features

- Adoption of MBIT process
- High breakdown voltage, large current capacity
- Fast switching speed

(): 2SA1768

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$


			unit
Collector to Base Voltage	V_{CB0}	(-)180	V
Collector to Emitter Voltage	V_{CEO}	(-)160	V
Emitter to Base Voltage	V_{EBO}	(-)6	V
Collector Current	I_C	(-)0.7	A
Collector Current(Pulse)	I_{CP}	(-)1.5	A
Collector Dissipation	P_C	1	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics at $T_a = 25^\circ\text{C}$


			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = (-)120\text{V}, I_E = 0$			(-)0.1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = (-)4\text{V}, I_C = 0$			(-)0.1	μA
DC Current Gain	$h_{FE}(1)$	$V_{CE} = (-)5\text{V}, I_C = (-)100\text{mA}$	100*		400*	
	$h_{FE}(2)$	$V_{CE} = (-)5\text{V}, I_C = (-)10\text{mA}$	90			
Gain-Bandwidth Product	f_T	$V_{CE} = (-)10\text{V}, I_C = (-)50\text{mA}$		120		MHz
Output Capacitance	c_{ob}	$V_{CB} = (-)10\text{V}, f = 1\text{MHz}$		(11)8		pF
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = 250\text{mA}, I_B = (-)25\text{mA}$	(-0.2)0.12	(-0.5)0.4		V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = 250\text{mA}, I_B = (-)25\text{mA}$	(-)0.85	(-)1.2		V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 10\mu\text{A}, I_E = 0$	(-)180			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1\text{mA}, R_{BE} = \infty$	(-)160			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	6			V
Turn-ON Time	t_{on}	See specified Test Circuit.		(60)50		ns
Storage Time	t_{stg}	"		(900)1000		ns
Fall Time	t_f	"		(60)60		ns

*: The 2SA1768/2SC4612 are classified by 100mA h_{FE} as follows :

100	R	200	140	S	280	200	T	400
-----	---	-----	-----	---	-----	-----	---	-----








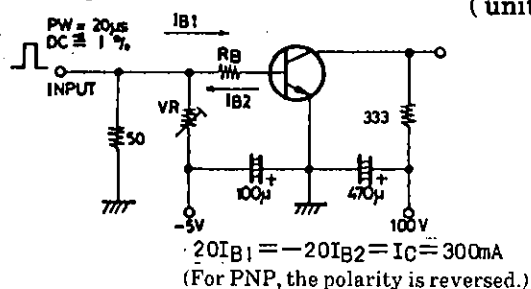
Switching Time Test Circuit









$20I_{B1} = -20I_{B2} = I_C = 300\text{mA}$
 (For PNP, the polarity is reversed.)

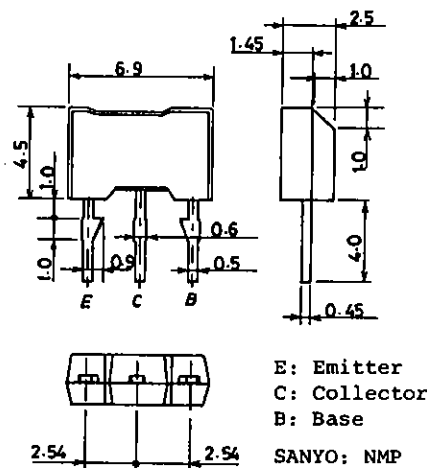
Unit(Resistance : Ω , Capacitance : F)**Package Dimensions 2064**
(unit: mm)

E: Emitter
 C: Collector
 B: Base
 SANYO: NMP

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
 TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

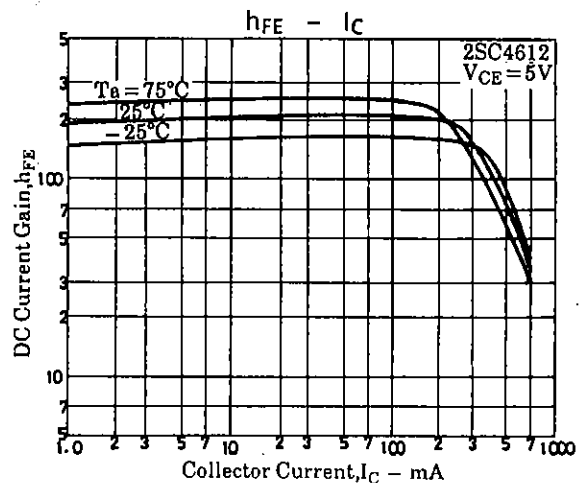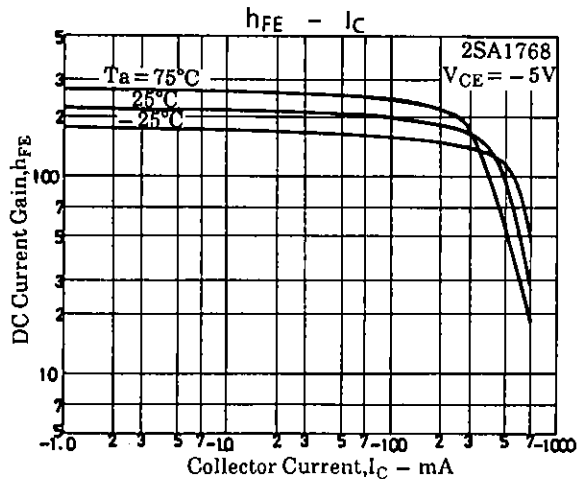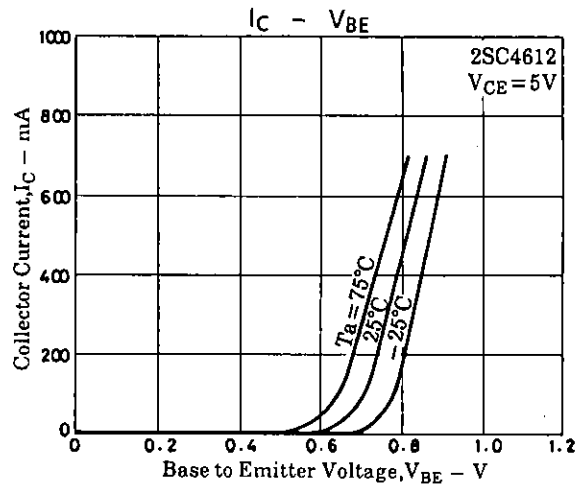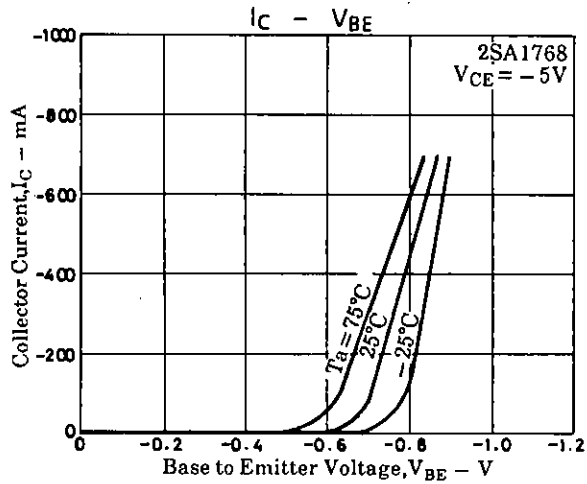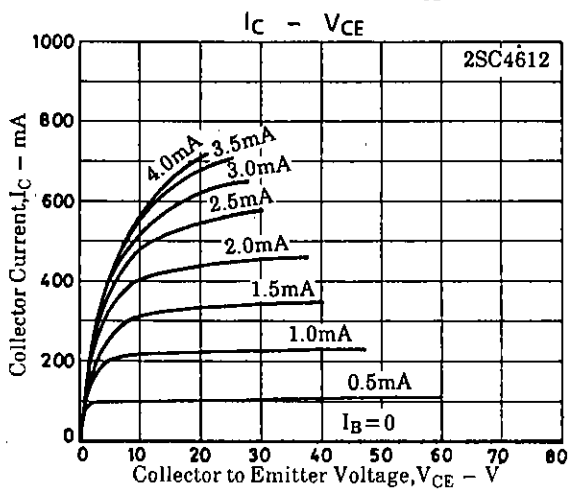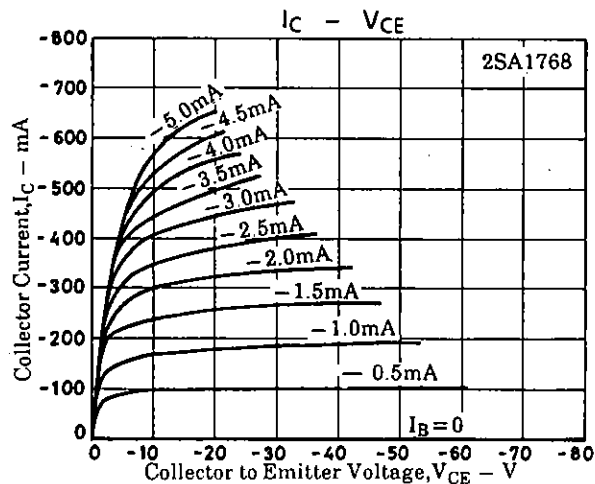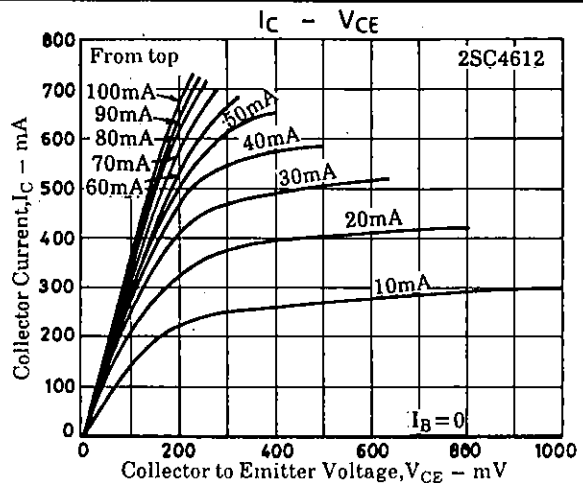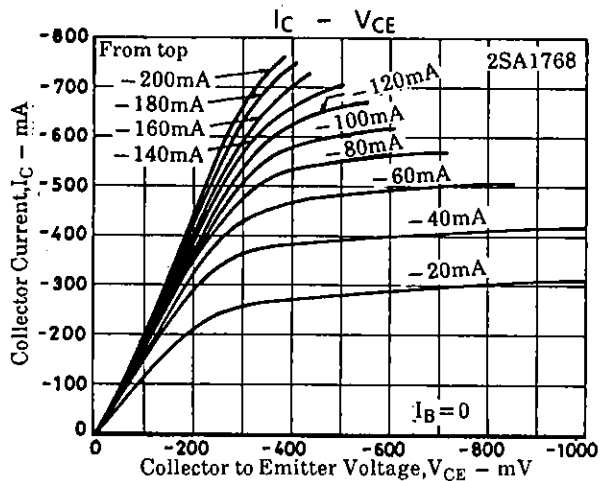

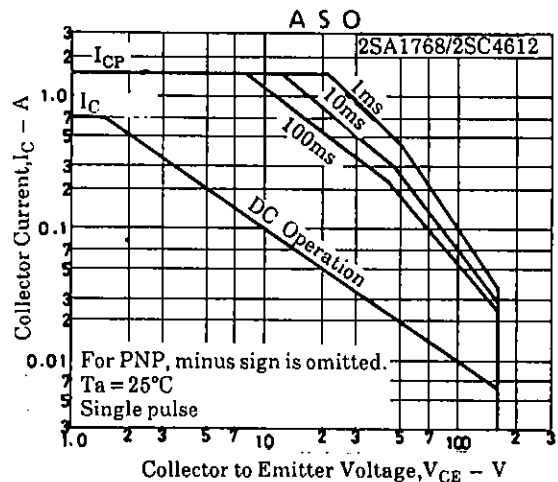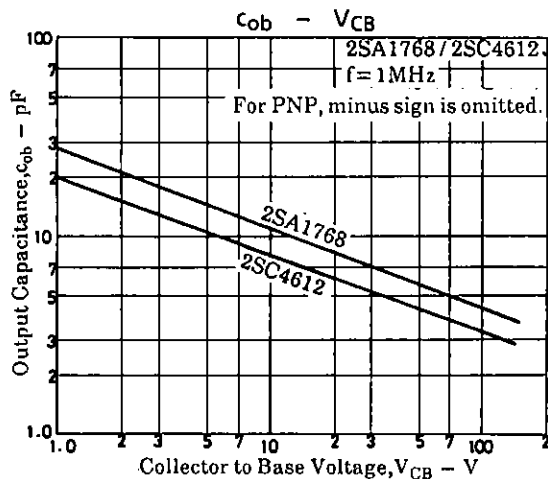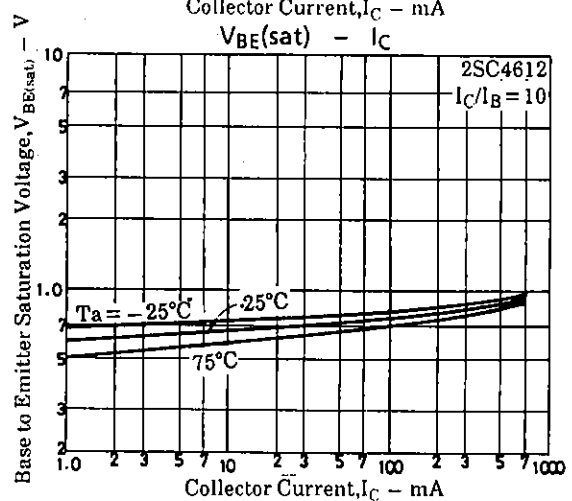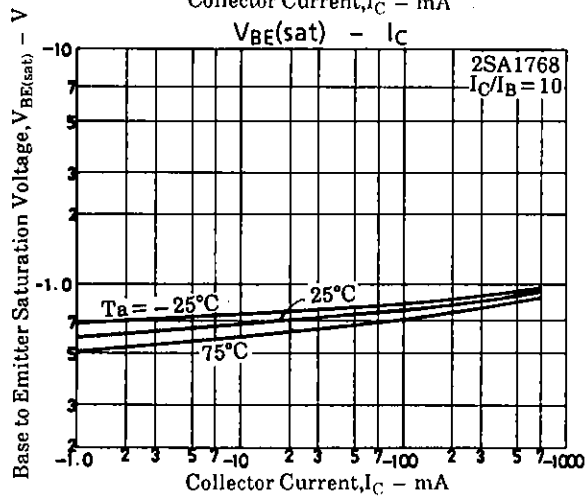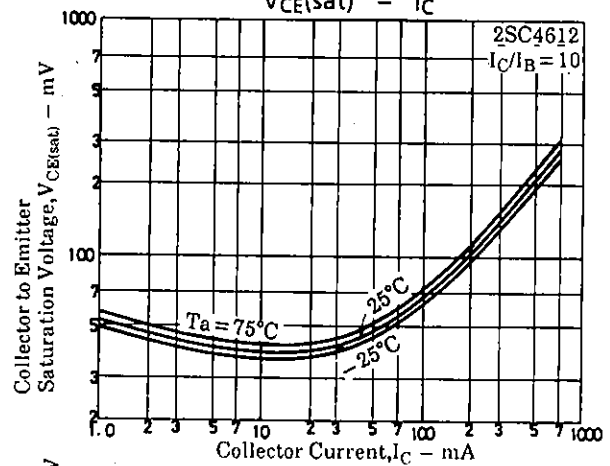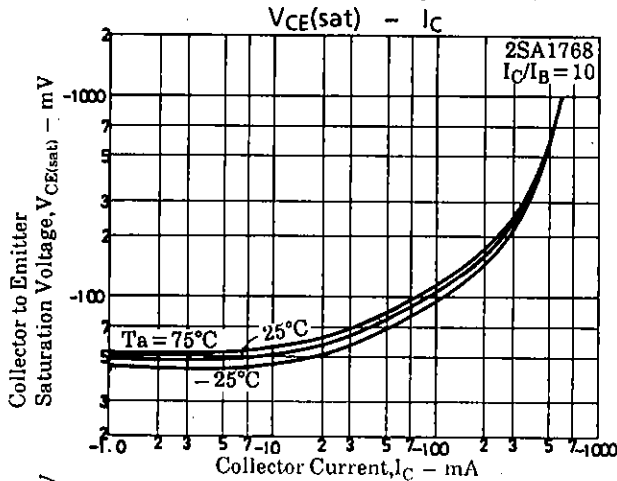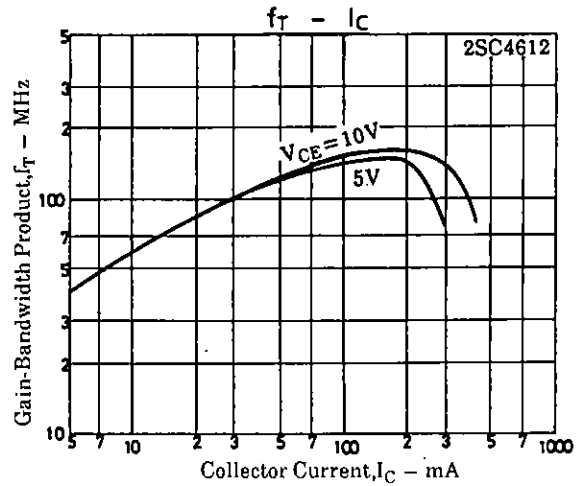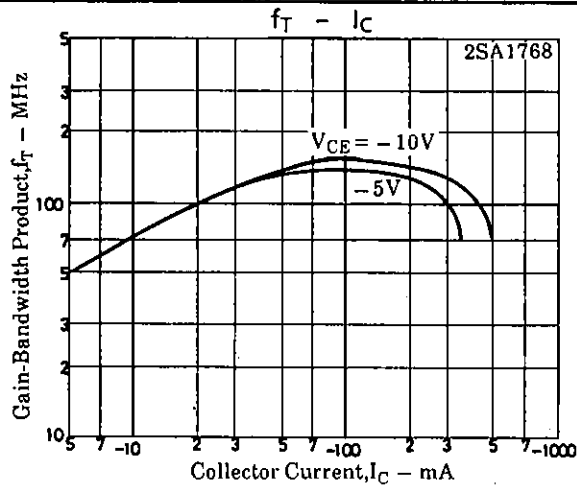

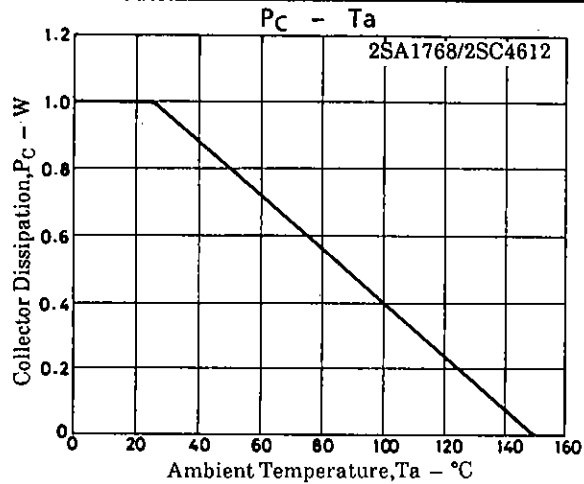

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.