

**SANYO**

No.2837A

**LA7629**

Monolithic Linear IC

Color TV/Video, Chroma, Deflection Circuit

The LA7629 is a small-sized multifunctional IC containing the "video, chroma, deflection" circuit of NTSC color TV in a DIP30S (equivalent to the DIP22 package heretofore in use) of shrink type. Besides being small-sized, it has such features as greatly reduced number of parts and fewer adjustments required. The LA7629 can be used in conjunction with the LA7520N,7555 for "VIP-SIF" use or the LA7830,7831,7835,7836 for "vertical output" use to perform all color TV signal processing functions.

The polarity of the quadratic differentiation circuit input of the LA7629 is inverted to facilitate easy connection of a Tr,L,C,R-used circuit for higher picture quality to the quadratic differentiation circuit input of the video circuit. The LA7629 containing a wide-band video circuit (10MHz) is suited for use in AV sets or large-sized sets.

**Features**

- Wide-band video circuit (10MHz)
- Small-sized package
- Minimum number of parts required
- Fewer adjustments required (non-adjusting of functions shown below)
  - Chroma VCO (APC)
  - Horizontal OSC H-Hold
  - Vertical OSC H-Hold
- Multifunction

**Maximum Ratings at  $T_a = 25^\circ\text{C}$** 


			unit
Maximum Supply Voltage	$V_{16 \text{ max}}$	14.0	V
Maximum Supply Current	$I_{22 \text{ max}}$	15.0	mA
Allowable Power Dissipation	$P_d \text{ max}$	1100	mW
Operating Temperature	$T_{opg}$	-20 to +85	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-55 to +125	$^\circ\text{C}$

**Operating Conditions at  $T_a = 25^\circ\text{C}$** 

			unit
Recommended Supply Voltage	$V_{16}$	12.0	V
Recommended Supply Current	$I_{22}$	10.0	mA
Operating Voltage Range	$V_{16 \text{ op}}$	9.0 to 14.0	V
Operating Current Range	$I_{22 \text{ op}}$	8.5 to 15.0	mA

The application circuit diagrams and circuit constants herein are included as an example and provide no guarantee for designing equipment to be mass-produced.

The information herein is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

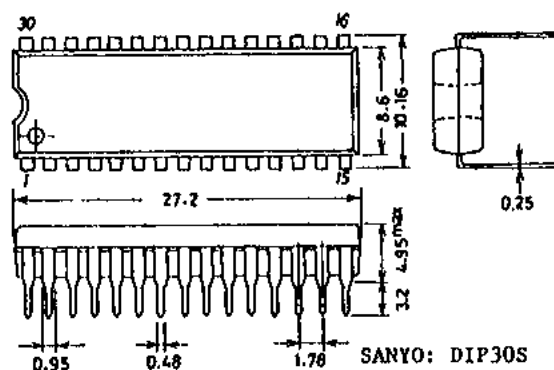**Case Outline 3061-D30SIC**  
(unit: mm)

SANYO: DIP30S

Specifications and information herein are subject to change without notice.

**SANYO Electric Co., Ltd. Semiconductor Overseas Marketing Div.**  
 Natsume Bldg., 18-6, 2-chome, Yushima, Bunkyo-ku, TOKYO 113 JAPAN

8098YT/6097TA, TS No.2837-1/4

## LA7629

Operating Characteristics at  $T_a = 25^\circ\text{C}$ ,  $V_{CC} = V_{16} = 12\text{V}$ ,  $I_{CC} = I_{22} = 10\text{mA}$ 


			min 40	typ 53	max 75	unit
Circuit Current	$I_{16}$	Quiescent				mA
[Deflection Block]						
Horizontal Supply Voltage	$V_{Z22}$		8.2	8.7	9.2	V
Sync Separation Input DC Level	$V_{S.S}$		9.0	9.3	9.6	V
Vertical Free-Running Frequency1	$f_{V1}$			$fH/296.5$		Hz
Vertical Free-Running Frequency2	$f_{V2}$			$fH/224.5$		Hz
Vertical Blanking Pulse Width	PW V.blk			$19.25/fH$		sec
Vertical Output Pulse Width	PW V.out			$10.25/fH$		sec
Vertical Drive Stage Voltage Gain	Gv		13	16.2	19	dB
Vertical Output Pulse Start Voltage	Vcds				4.0	V
Vertical Pull-in Start Voltage	$V_{yps}$				4.0	V
Vertical Blanking Pulse Peak Value	VV.blk			10		V
Horizontal Free-Running Frequency	fH	Diff. bet. 15.734kHz and hor. output freq.	-70	30	130	Hz
Horizontal OSC Frequency	$\Delta fH(V)$	$fH(8V) - fH(7V)$	-10	0	10	Hz
Change with Line Regulation						
Horizontal OSC Frequency	$\Delta fH/\Delta T$	$T_a = -10 \text{ to } 60^\circ\text{C}$	-1.5		1.5	Hz/°C
Change with Ambient Temperature						
Horizontal Output Pulse Width	PW H.out		23.5	24.5	25.5	$\mu\text{s}$
Horizontal Sync Pull-in Range	fH pull	Deviation from 15.734kHz	$\pm 400$			Hz
Horizontal Output Pulse Start Voltage	$V_{Hpos}$				5.5	V
Horizontal Free-Running Frequency Secular Drift	$\Delta f_{HT}$	5sec to 30min after power ON	-50	-10	30	Hz
Horizontal Blanking Threshold Level	$V_{Hblk}$		11			V
Horizontal Output Drive Current	$I_{H.O}$		2.0		4.5	mA
Horizontal OSC Control Sensitivity	BfH	Reference value		236		Hz/ $\mu\text{s}$
Hold-down Start Input Voltage	$V_{HD}$		0.55	0.65	0.75	V
[Video Block]						
Video Tone Voltage Gain	Gtone	$f = 2\text{MHz}$ , video tone VR:12V	7	9.6	12	dB
Video Voltage Gain	AV	$f = 100\text{kHz}$ , video tone VR:12V	12	15	18	dB
Contrast Control Center	eo	$f = 100\text{kHz}$ , input: 100mVp-p	0.2	0.3	0.4	Vp-p
Contrast Variable Range	$\Delta eo$	$f = 100\text{kHz}$	16	18	20	dB
Bright Control Characteristic 1	BR1	Quiescent, bright VR:3V	8			V
Bright Control Characteristic 2	BR2	Quiescent, bright VR:6V	5.8	6.3	6.8	V
Bright Control Characteristic 3	BR3	Quiescent, bright VR:9V			4.5	V
Frequency Characteristic	f			10		MHz
DC Transmission	$R_{DC}$	Stair step signal		100		%

Continued on next page.

Continued from preceding page.

			min	typ	max	unit
[Chroma Block]						
ACC Amplitude Characteristic 1	ACC1	Input: +6dB	-3	0	+3	dB
ACC Amplitude Characteristic 2	ACC2	Input: -20dB	-7		+2	dB
ACC Phase Characteristic 1	ACC $\phi$ 1	Input: +6dB	-3		+3	deg
ACC Phase Characteristic 2	ACC $\phi$ 2	Input: -20dB	-7		+2	deg
Killer Operation Point	EK			-40		dB
Color Control Center	B-Y cen	Output B-Y: color VR 6V	2.9	4.3	5.5	Vp-p
Maximum Demodulation Output	B-Y max	Output B-Y: color VR 12V	5.5	6.5		Vp-p
Color Contrast Variable Range	$\Delta G$ cont	Output B-Y	15.7	17.0	18.5	dB
Tint Center	T cen	Output B-Y: tint VR	-17	-5	+7	deg
Tint Variable Range	$\Delta T$	Output B-Y	-45			deg
APC Pull-in Range	$\Delta f$ APC		$\pm 300$			Hz
Demodulation Output Ratio 1	R-Y/B-Y		0.81	0.90	0.98	
Demodulation Output Ratio 2	G-Y/B-Y		0.24	0.30	0.38	
Demodulation Angle 1	$\angle$ R-Y/B-Y Tint VR 6V		96	104	112	deg
Demodulation Angle 2	$\angle$ G-Y/B-Y Tint VR 6V		-132	-122	-112	deg
Color Difference Output	V9, 10, 11		6.7	7.2	7.7	V
DC Voltage						
Color Difference Output	$\Delta V9, 10, 11$		-200		+200	mV
DC Difference Voltage						

Equivalent Circuit Block Diagram and Sample Peripheral Circuit

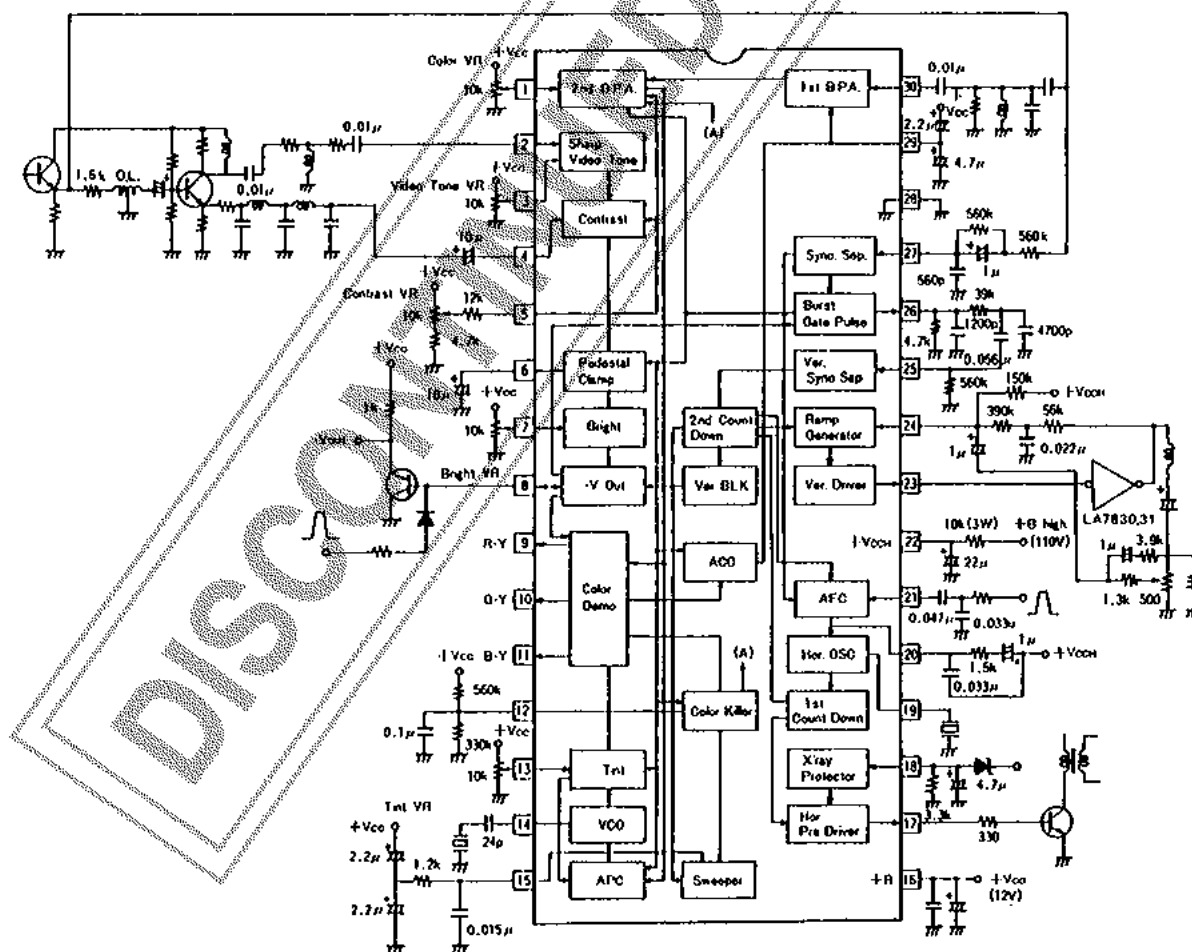


## LA7629

### Sample Application


where the LA7629 is used in conjunction with a vertical output IC (LA7830, 7831)

#### With vertical stabilization circuit

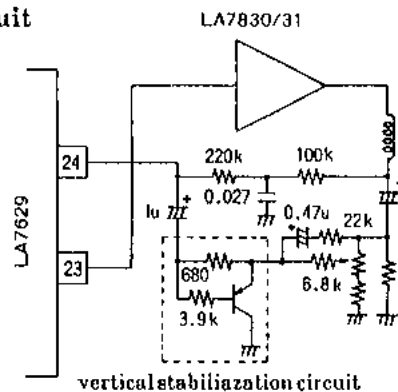

### Sample Application

where the LA7629 is used in conjunction with a vertical output IC (LA7835, 7836)

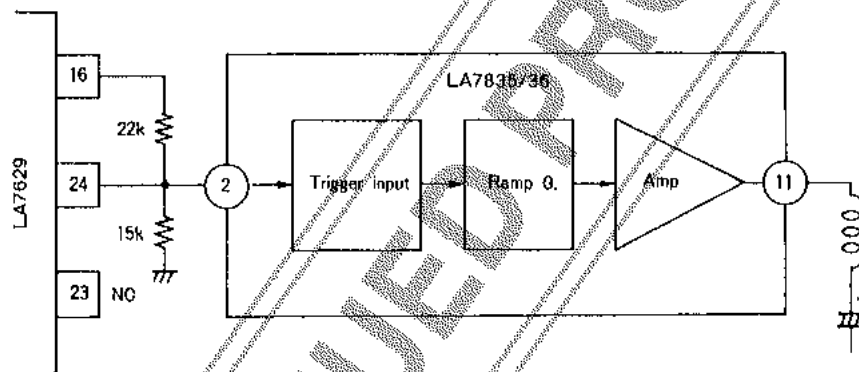

For "Y.Chroma.Def." ICs for CTV NTSC use, the following types are available.  
Select the IC most suited for your intended CTV set.

Type No.	Peak clip	DC restoration	Quadratic differentiation circuit input polarity	Video tone		Remarks
				Soft	Sharp	
LA7620	○	70%	Positive	○	○	
LA7621	×	70%	Positive	○	○	
LA7625	○	100%	Positive	○	○	
LA7626	×	100%	Positive	○	○	
LA7629	×	100%	*Negative	×	○	Video band 10MHz

\* Inverting amp required