


MICRO (MGB27TA)

ELECTRONICS

ULTRA HIGH
BRIGHTNESS
GREEN LED LAMP

DESCRIPTION

MGB27TA-X is high efficiency green GaP LED lamp encapsulated in a 2.78mm diameter clear transparent lens. 3 brightness grouping is provided for customer's selection.

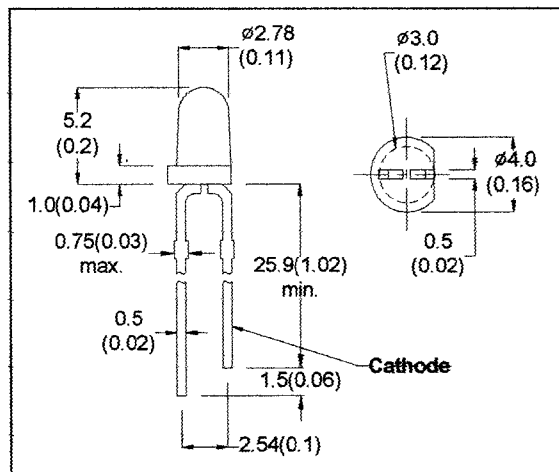

● All Dimension in mm (inch)

● NO Scale

● Tol : + / - 0.3mm

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @Ta=25°C	90mW
Forward Current, DC (IF)	30mA
Reverse Voltage	5V
Operating & Storage Temperature Range	-55 to +100°C
Lead Soldering Temperature (1/16" from body)	260°C for 5 sec.

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF		2.2	3.0	V	IF=20mA
Reverse Breakdown Voltage	BVR	5			V	IR=100 μ A
Luminous Intensity	IV				mcd	IF=20mA
MGB27TA & -1		200	500		mcd	IF=20mA
-2		350	650		mcd	IF=20mA
-3		500	800		mcd	IF=20mA
Peak Wavelength	λ_p		570		nm	IF=20mA
Spectral Line Half Width	$\Delta\lambda$		30		nm	IF=20mA
Viewing Angle	2 θ 1/2		12		degree	IF=20mA

MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex: 43510 Micro Hx. Tel: 2343 0181-5

Aug-99