

**IMST**

TENTATIVE

Thick Film Hybrid IC

**STK417-000series**

2-channel High Efficiency AF Power Amplifier  
50W × 2 ~ 100W × 2 (THD=0.4%)

■ Function . . . . .  
2-channel High Efficiency AF Power Amplifier

■ Application . . . . .  
Audio use

■ Feature . . . . .

- Low Power consumption
- Built-in switch circuit of Power Supply Voltage
- Built-in thermal detection
- Built-in anti AM noise circuit
- Pin Compatible STK407-000series and STK427-000series

\* STK407-000series is Normal AF Power Amplifier

\* STK427-000series is Other System High Efficiency AF Power Amplifier

■ Schedule . . . . .

ES 1996.12

MP 1997.6


■ The composition of compatible series

$T_a = 25^{\circ}\text{C}$ ,  $R_g = 600\Omega$ ,  $V_G = 40\text{dB}$ ,  $R_L$  (Non-inductive Load)

Item	Condition	Type			
		STH 417-09C	SLH 417-10C	STV 417-12C	STV 417-13C
Max.Voltage VH1	$R_L=6\Omega, 8\Omega$	$\pm 50.0\text{V}$	$\pm 53.0\text{V}$	$\pm 61.0\text{V}$	$\pm 67.0\text{V}$
Max.Voltage VH2	$R_L=4\Omega$	$\pm 40.0\text{V}$	$\pm 42.0\text{V}$	$\pm 46.0\text{V}$	$\pm 48.0\text{V}$
Max.Voltage VL1	$R_L=6\Omega, 8\Omega$	$\pm 27.5\text{V}$	$\pm 29.0\text{V}$	$\pm 33.5\text{V}$	$\pm 37.0\text{V}$
Max.Voltage VL2	$R_L=4\Omega$	$\pm 19.0\text{V}$	$\pm 20.5\text{V}$	$\pm 23.5\text{V}$	$\pm 26.0\text{V}$
Output Power 1 [min.]	$R_L=6\Omega$ $f=20\sim 20\text{kHz}$ $\text{THD}=0.4\%$	$P_O=50\text{W}$ ( $V_H=\pm 34.0\text{V}$ )	$P_O=60\text{W}$ ( $V_H=\pm 36.0\text{V}$ )	$P_O=80\text{W}$ ( $V_H=\pm 42.0\text{V}$ )	$P_O=100\text{W}$ ( $V_H=\pm 46.0\text{V}$ )
Output Power 2 [typ.]	$R_L=6\Omega$ $f=1\text{kHz}$ $\text{THD}=10\%$	$P_O=75\text{W}$ ( $V_H=\pm 31.0\text{V}$ )	$P_O=90\text{W}$ ( $V_H=\pm 33.0\text{V}$ )	$P_O=120\text{W}$ ( $V_H=\pm 38.0\text{V}$ )	$P_O=150\text{W}$ ( $V_H=\pm 42.0\text{V}$ )
Output Power 3 [typ.]	$R_L=8\Omega$ $f=1\text{kHz}$ $\text{THD}=10\%$	$P_O=70\text{W}$ ( $V_H=\pm 33.0\text{V}$ )	$P_O=80\text{W}$ ( $V_H=\pm 35.0\text{V}$ )	$P_O=100\text{W}$ ( $V_H=\pm 40.0\text{V}$ )	$P_O=130\text{W}$ ( $V_H=\pm 44.0\text{V}$ )
Output Power 4 [typ.]	$R_L=4\Omega$ $f=1\text{kHz}$ $\text{THD}=10\%$	$P_O=70\text{W}$ ( $V_H=\pm 25.0\text{V}$ )	$P_O=80\text{W}$ ( $V_H=\pm 26.5\text{V}$ )	$P_O=100\text{W}$ ( $V_H=\pm 30.0\text{V}$ )	$P_O=120\text{W}$ ( $V_H=\pm 32.0\text{V}$ )
THD 1 [max.]	$R_L=6\Omega$ $f=20\sim 20\text{kHz}$ $P_O=1.0\text{W}$	$\text{THD}=0.4\%$ ( $V_H=\pm 34.0\text{V}$ )	$\text{THD}=0.4\%$ ( $V_H=\pm 36.0\text{V}$ )	$\text{THD}=0.4\%$ ( $V_H=\pm 42.0\text{V}$ )	$\text{THD}=0.4\%$ ( $V_H=\pm 46.0\text{V}$ )
THD 2 [typ.]	$R_L=6, 8\Omega$ $f=1\text{kHz}$	$\text{THD}=0.01\%$ ( $P_O=5\text{W}$ )	$\text{THD}=0.01\%$ ( $P_O=6\text{W}$ )	$\text{THD}=0.01\%$ ( $P_O=8\text{W}$ )	$\text{THD}=0.01\%$ ( $P_O=10\text{W}$ )
THD 3 [typ.]	$R_L=4\Omega$ $f=1\text{kHz}$	$\text{THD}=0.04\%$ ( $P_O=5\text{W}$ )	$\text{THD}=0.04\%$ ( $P_O=6\text{W}$ )	$\text{THD}=0.04\%$ ( $P_O=8\text{W}$ )	$\text{THD}=0.04\%$ ( $P_O=10\text{W}$ )

※ Specifications and information herein are subject to change without notice.

## ■Equivalent Block Diagram

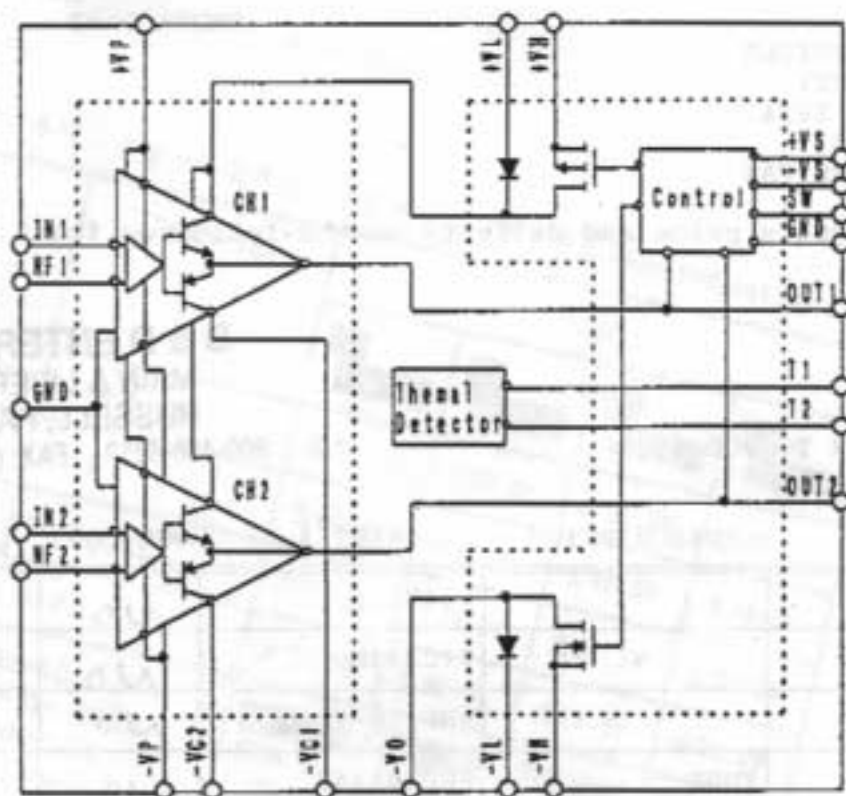

## ■Case Outline

STK417-090 to STK417-130

