

DESCRIPTION


MOB51 Series are orange LED lamp with 5mm diameter epoxy package.

MOB51C is orange chip with orange transparent lens.

MOB51D is orange chip with orange diffused lens.

MOB51T is orange chip with clear transparent lens.

MOB51W is orange chip with clear diffused lens.

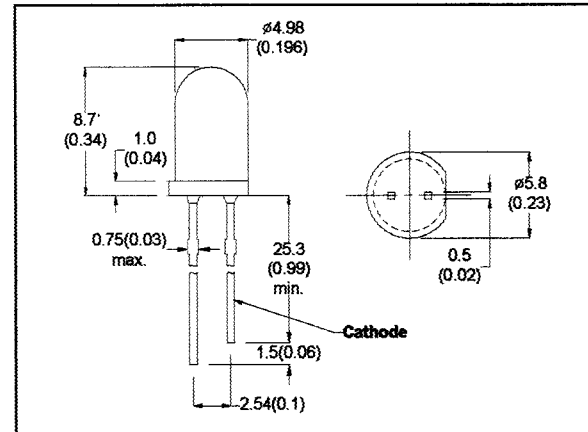

- All Dimension in mm (inch)
- No Scale
- Tol : + / - 0.3mm

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @ Ta=25°C	90mW
Forward Current, DC (IF)	30mA
Reverse Voltage	5V
Operating & Storage Temperature Range	-55 to +100°C
Lead Soldering Temperature (1/16" from body)	260°C for 5 sec.

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MOB51C	MOB51D	MOB51T	MOB51W	UNIT	CONDITIONS
Forward Voltage	MAX	VF	3.0	3.0	3.0	V	IF=20mA
Reverse Breakdown Voltage	MIN	BVR	5	5	5	V	IR=100 μA
Luminous Intensity	MIN	IV	80	35	80	mcd	IF=20mA
	TYP		150	60	150	mcd	
Peak Wavelength	TYP	λp	630	630	630	nm	IF=20mA
Spectral Line Half Width	TYP	Δλ	40	40	40	nm	IF=20mA