

DESCRIPTION

MOB81 Series are GaAsP/GaP orange LED lamp with 2.37x4.88mm round rectangular bars.

MOB81CA is orange chip with orange transparent lens.


MOB81CRA is orange chip with red transparent lens.

MOB81D is orange chip with orange diffused lens.

MOB81DR is orange chip with red diffused lens.

MOB81TA is orange chip with clear transparent lens.

MOB81W is orange chip with clear diffused lens.

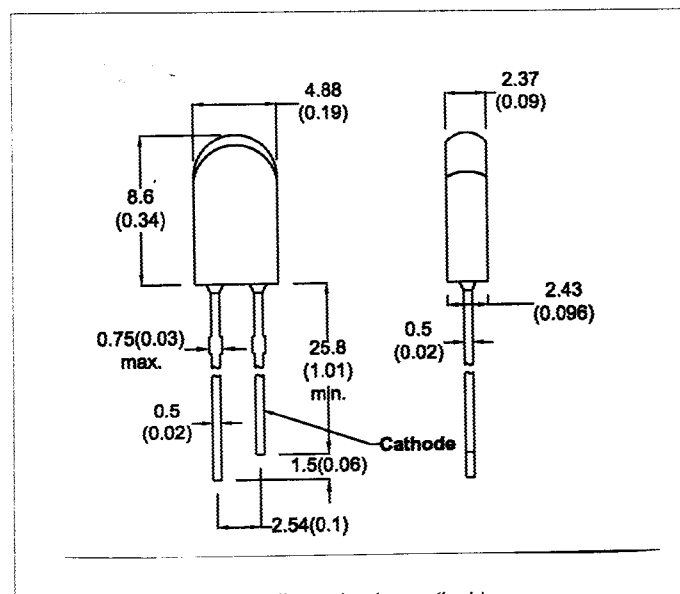

- All dimension in mm(inch)
- No Scale
- Tol. : +/-0.3mm

ABSOLUTE MAXIMUM RATINGS

Power Dissipation ($T_a=25^\circ\text{C}$)

Forward Current, DC (I_F)

Reverse Voltage

Operating & Storage Temperature Range

Lead Temperature

90mW

30mA

5V

-55 to +100°C

260°C

ELECTRO-OPTICAL CHARACTERISTICS

($T_a=25^\circ\text{C}$)

PARAMETER	SYMBOL		MOB81CA	MOB81D	MOB81TA	MOB81W	UNIT	CONDITIONS
			MOB81CRA	MOB81DR				
Forward Voltage	MAX	VF	3.0	3.0	3.0	3.0	V	$I_F=20\text{mA}$
Reverse Breakdown Voltage	MIN	BVR	5	5	5	5	V	$I_R=100\mu\text{A}$
Luminous Intensity	MIN	IV	100	25	100	25	mcd	$I_F=20\text{mA}$
	TYP		180	40	180	40	mcd	$I_F=20\text{mA}$
Peak Wavelength	TYP	λ_p	630	630	630	630	nm	$I_F=20\text{mA}$
Spectral Line Half Width	TYP	$\Delta\lambda$	35	35	35	35	nm	$I_F=20\text{mA}$
Viewing Angle	TYP	2θ 1/2	16	124	16	124	degree	$I_F=20\text{mA}$



MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5