

MICRO ELECTRONICS MOG2158TC

**THREE COLOR
EMITTED LED DOT
MATRIX DISPLAY**

FEATURES :

Three emitted color : High efficiency red, green, orange
(The mixture of high efficiency red and green)
Anode column, Cathode row (MOG2158TA);
Cathode column, Anode row (MOG2158TC)
High contrast
Dot clear transparent lens
5 x 8 matrix array with row-column select
Regged encapsulation (Filled reflector construction)
End & side stackable

ABSOLUTE MAXIMUM RATINGS

Power Dissipation / Dot	75mW
Peak Forward Current / Dot*	100mA
Continuous Forward Current / Dot	25mA
Reverse Voltage / Dot	5V
Operating Temperature Range	-20 to +75°C
Storage Temperature Range	-25 to +80°C
Lead Temperature (Soldering 5 sec., 1/16" from body)	260°C

* Note : Pulse Width = 1mS, Duty Ratio = 1/10.

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER		SYMBOL	Hi-Eff. Red	Green	UNIT	CONDITIONS
Forward Voltage	MAX	VF	3.0	3.0	V	IF=20mA
Luminous Intensity	MIN	IV	3.5	5.0	mcd	IF=10mA
	TYP		6.0	9.0	mcd	IF=10mA
Dot to Dot Luminous Intensity Ratio	MAX		2:1	2:1		IF=10mA
Reverse Current Any Bar	MAX	IR	100	100	μ A	VR=5V
Peak Wavelength	TYP	λ_p	630	570	nm	IF=20mA
Spectral Line Half Width	TYP	$\Delta\lambda$	40	30	nm	IF=20mA

Page 1 of 2


MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Buiding, Kwun Tong, Kowloon, Hong Kong.
Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

Aug-99

MOG2158TA / MOG2158TC

MECHANICAL OUTLINE

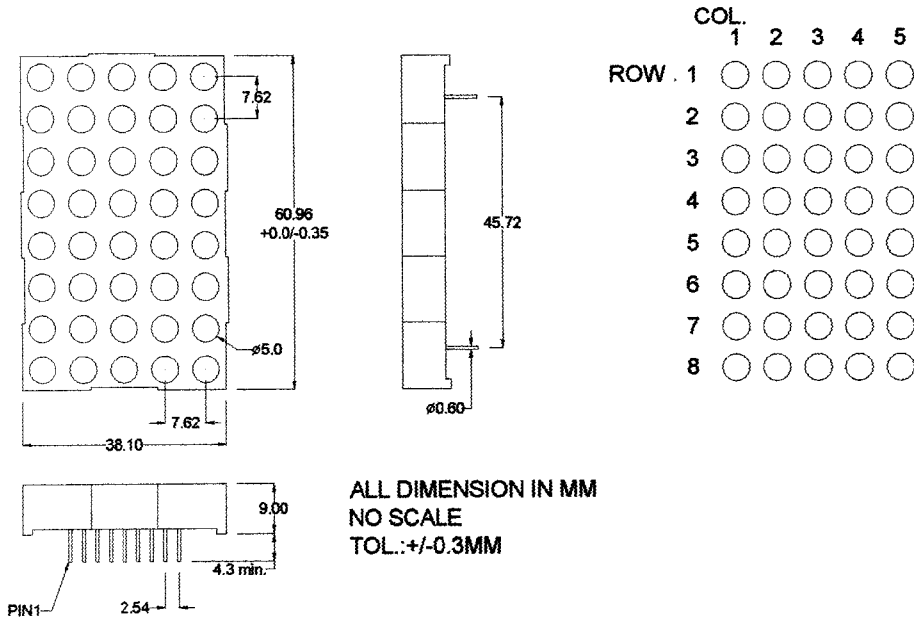

CIRCUIT DIAGRAM

