



# LDO\_518

## IP Library: Low Noise, High PSRR 100mA Low Dropout Voltage Regulator

PRODUCT PREVIEW

- ULTRA LOW POWER REGULATOR
- ULTRA LOW CONSUMPTION : 45µA FULL LOAD
- VERY LOW NOISE : 30µV
- VERY LOW DROPOUT VOLTAGE : 50mV
- HIGH PSRR : 60dB
- SMALL DECOUPLING CERAMIC CAPACITOR
- NO CURRENT IN POWER DOWN MODE
- SHORT CIRCUIT PROTECTION

### TYPICAL APPLICATIONS

- Cellular and Cordless phones supplied by 1 cell Lithium-ion battery / 3 cells Ni-MH or Ni-Cd battery
- PDA (Personal Digital Assistant)
- Smart phone
- Portable equipment
- Supply for RF devices for cellular phone

### APPLICATION NOTE

An external capacitor ( $C_{OUT} = 2.2\mu F$ ) with an equivalent serial resistance (ESR) in the range of 0.02 to 0.6Ω is used for regulator stability.

Figure 1 : Block Diagram


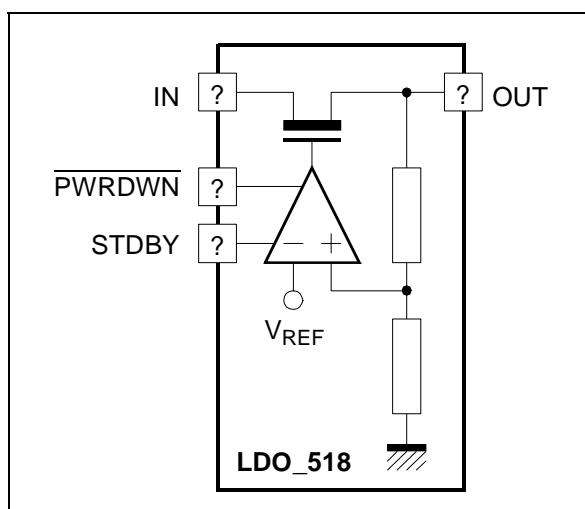


Figure 2 : Typical Application Circuit

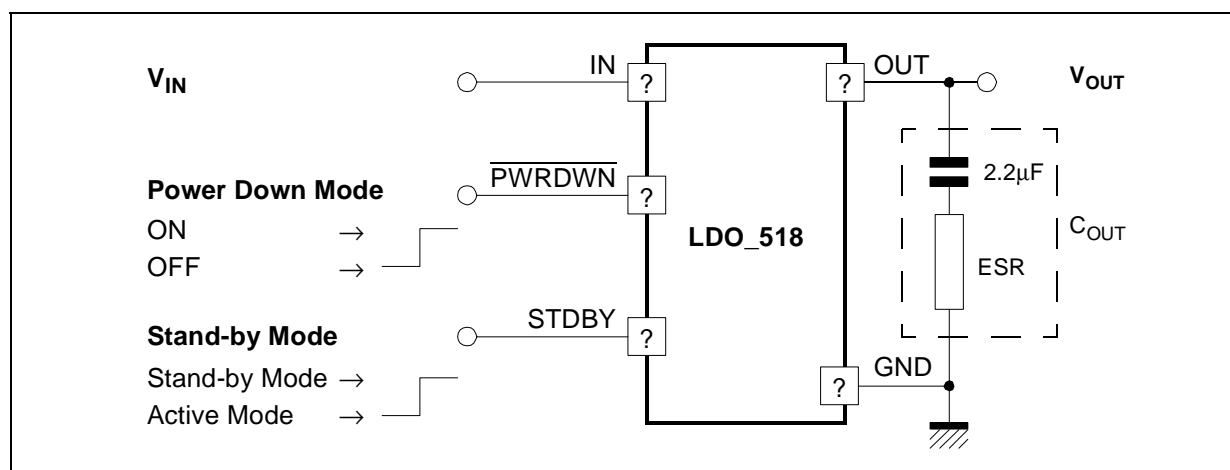

**ELECTRICAL CHARACTERISTICS**

$2V < V_{IN} < 5V$ ,  $-55^{\circ}C < T_A < +125^{\circ}C$ ,  $C_{OUT} = 2.2\mu F \pm 20\%$ ,  $20\ m\Omega < ESR < 0.6\Omega$ ,  $I_{LOAD} = 100mA$ .

Typical case :  $V_{IN} = 4V$ ,  $T = 25^{\circ}C$ ,  $C_{OUT} = 2.2\mu F$ .

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage Range (Note 1)	$V_{IN}$		2		5	V
Output Voltage	$V_{OUT}$			1.8		V
Output Voltage Accuracy				3		%
Output current	$I_{OUT}$				100	mA
Dropout Voltage	$\Delta V_{DO}$	$\Delta V_{OUT} = 50mV$ , $I_{LOAD} = 100mA$			50	mV
		(Note 2)	170			
Quiescent current	$I_Q$	$I_{LOAD} = 100\mu A$		25		$\mu A$
		$I_{LOAD} = 1mA$		25		
		$I_{LOAD} = 10mA$		30		
		$I_{LOAD} = 50mA$		35		
		$I_{LOAD} = 100mA$		45	50	
Power down mode quiescent current	$I_{QPDM}$	Power down active		100		nA
Power Supply Rejection Ratio	PSRR	$\Delta V_{DO} = 170mV$ ; $f < 1KHz$	45	50		dB
		$f < 10KHz$	35	40		
		$\Delta V_{DO} = 500mV$ ; $f < 100Hz$	60	65		
		$f < 1KHz$	55	60		
		$f < 10KHz$	40	45		
Line Regulation	$L_{IR}$	$I_{LOAD} = 100mA$ , $V_{IN} = 2V$ to $5V$		0.5	1	mV
Load Regulation	$L_{DR}$	$I_{LOAD} = 100\mu A - 100mA$		15	20	mV
Line Transient	$L_{IRT}$	$\Delta V_{IN} = 300mV$ $t_{RISE} = t_{FALL} = 10\mu s$		6	10	mV
Load Transient	$L_{DTR}$	$I_{LOAD} = 100\mu A - 100mA$ in $10\mu s$		7	50	mV
Output Noise Voltage	en	100Hz		140		$\frac{nV}{\sqrt{Hz}}$
		1KHz		75		
		10KHz		70		
	$en_{RMS}$	BW : 100Hz to 100KHz		40		$\mu V_{RMS}$
Settling time		$I_{LOAD} = 100mA$		35		$\mu s$

Notes: 1. Above characteristics are given for 3V minimum input operating range voltage, but regulator is operational with 2.5V minimum input voltage.

2. All parameters are guaranteed with 170mV min Dropout voltage.

**ELECTRICAL CHARACTERISTICS**


$2V < V_{IN} < 5V$ ,  $-55^{\circ}C < T_A < +125^{\circ}C$ ,  $C_{OUT} = 2.2\mu F \pm 20\%$ ,  $0.02\Omega < ESR < 0.6\Omega$ ,  $I_{LOAD} = 100mA$ .

Typical case :  $V_{IN} = 4V$ , Ambient temperature,  $I_{LOAD} = 100mA$ .

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output decoupling Capacitor	$C_{OUT}$			2.2		$\mu F$
Cout equivalent serial resistor	ESR		0.02		0.6	$\Omega$
Short Circuit Current Limit	$I_{SHORT}$		200	400	800	mA
Settling Time	$t_S$			35	60	$\mu s$

**TYPICAL CHARACTERISTICS**

**Figure 3 : PSRR vs Frequency for Various Dropout ( $V_{OUT} = 1.8V$ , Full Load)**

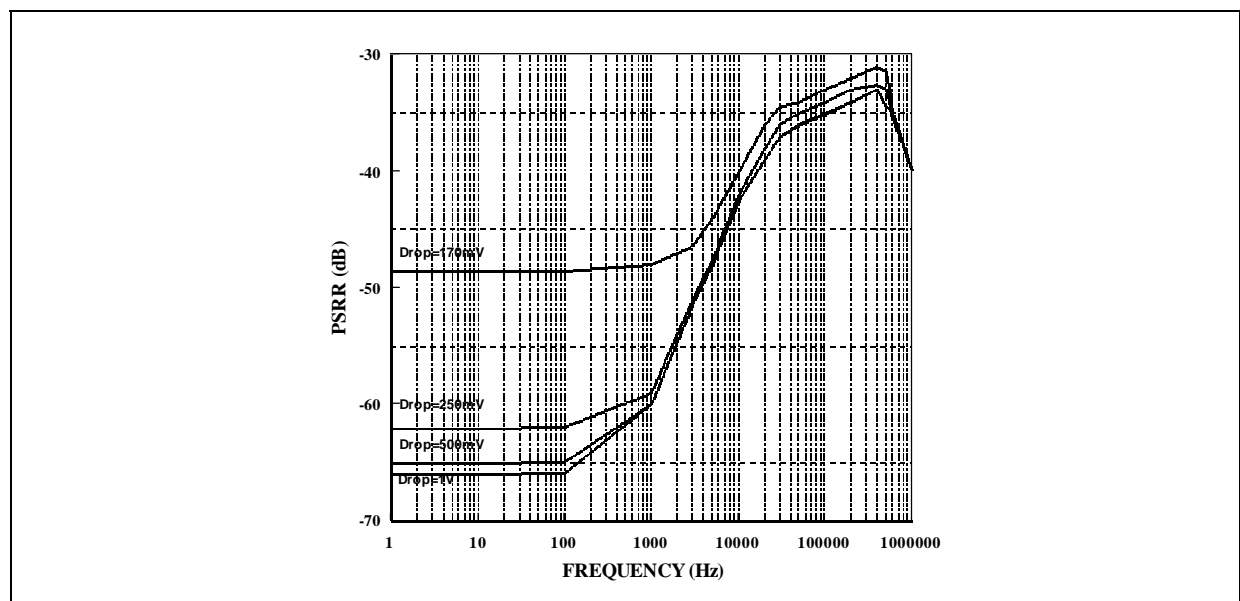

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

<http://www.st.com>