

***ME* DISPLAYS**

SPECIFICATIONS

FOR

LCD MODULE

SG12232B

MICRO ELECTRONICS CORPORATION

3375 Scott Blvd. Suite 222 Santa Clara CA 95054

Tel: 408-988-1101 Fax: 408-988-7626

Email: micro@microelect.com

[Http://www.microelect.com](http://www.microelect.com)

• FEATURES

Number of Dots	122 x 32
Built-in Controller IC	S6B1713 or equivalent
Duty Cycle	1/32 Duty
LED Forward Voltage	4.2V
Options	EL/LED Backlight, STN

• MECHANICAL PARAMETERS

Module Size	74.0W x 28.0H x 6.5T mm
Viewing Area Size	58.9W x 18.4H mm
Active Area Size	54.87W x 14.37H mm
Dot Size	0.41 x 0.41 mm
Dot Pitch	0.45 x 0.45 mm

• ABSOLUTE MAXIMUM

Item	Symbol	Min.	Max	Unit
Supply Voltage for Logic	$V_{DD} - V_{SS}$	0	7.0	V
Supply Voltage for LCD Drive	$V_{DD} - V_O$	0	17	V
Input Voltage	V_i	V_{SS}	V_{DD}	V
Operating Temperature	T_a	0	+50	C
Storage Temperature	T_{stg}	-10	+60	C

• ELECTRICAL CHARACTERISTICS

Item	Symbol	Condition	Min	Typ	Max	U
Power Supply Voltage for Logic	$V_{DD} - V_{SS}$	--	2.4	3.0	3.6	V
Power Supply Voltage for LCD	$V_{DD} - V_O$	$V_{DD}=5V$ $T_a=25C$	4.4	4.8	5.2	V
Input "High" Voltage(1)	V_{ih}	--	2.2	--	V_{DD}	V
Input "Low" Voltage(1)	V_{il}	--	--	--	0.6	V
Output "High" Voltage(1)	V_{oh}	--	2.4	--	--	V
Output "Low" Voltage(1)	V_{ol}	--	--	--	0.4	V
Power Supply Current	I_{DD}	$V_{DD} = 5.0V$	--	2.5	4.5	mA


(1) Applied to terminals CS1, CS2, DB0~DB7, R/W, D/I, E RST

- PIN ASSIGNMENT**


No.	Symbol
1	V _{SS}
2	V _{DD}
3	V _O
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3

No.	Symbol
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	/RES
18	V _{EE}
19	A
20	K

- BLOCK DIAGRAM**

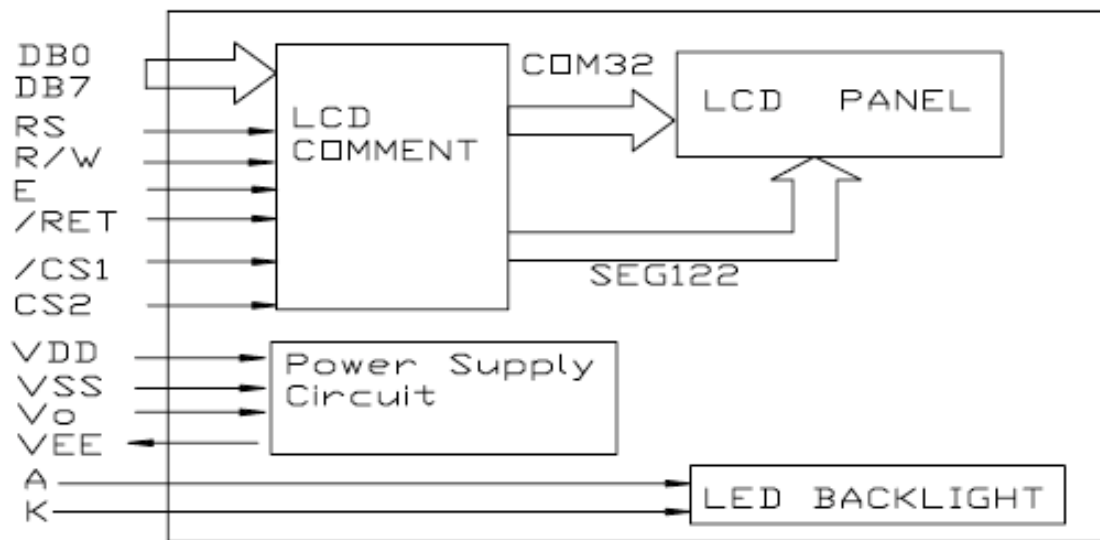

- DIAGRAM SG12232B

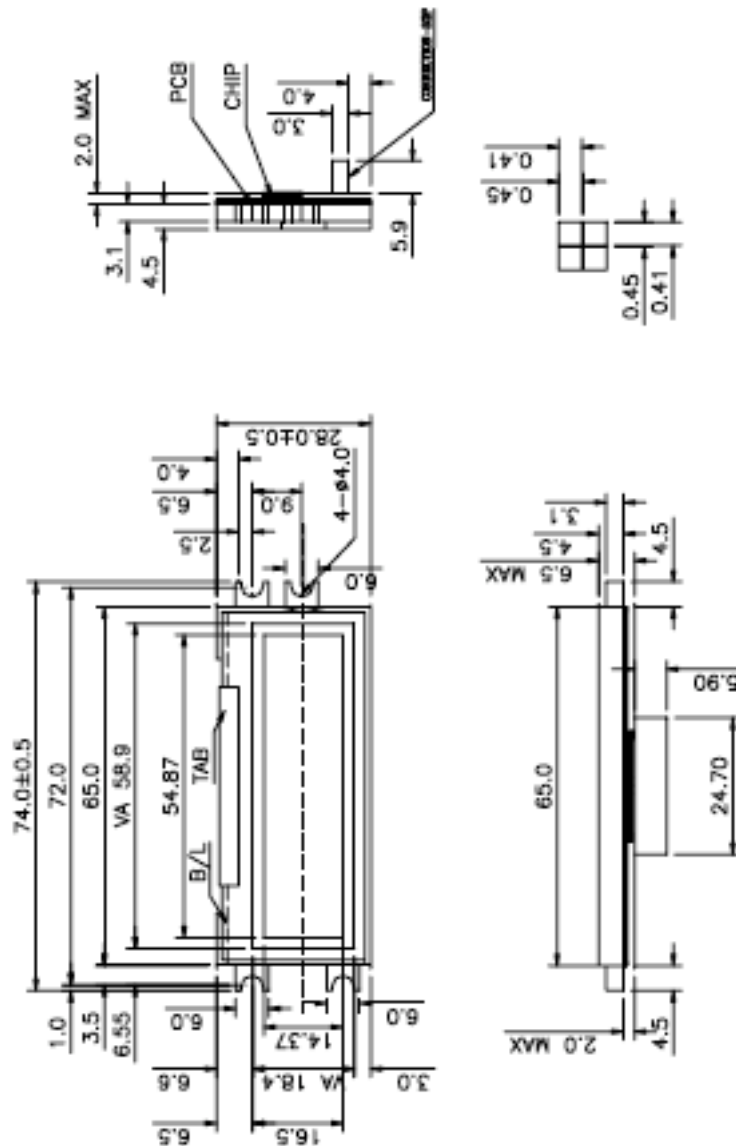

• TIMING CHARACTERISTICS

Item	Symbol	Min	Max	Unit
System Cycle Time	t_{CYC6}	1000	--	ns
Address Set-up time	t_{AW6}	20	--	ns
Address Hold Time	t_{AH6}	10	--	ns
Data Set-up Time	t_{DS6}	80	--	ns
Data Hold Time	t_{DH6}	10	--	ns
Output Disable Time	t_{OH6}	10	60	ns
Access Time	t_{AAC6}	--	90	ns
Enable Pulse Width (Read)	t_{EW}	100	--	ns
Enable Pulse Width (Write)	t_{EW}	80	--	ns

• TIMING DIAGRAMS

