


Schottky Powermod CPT30230

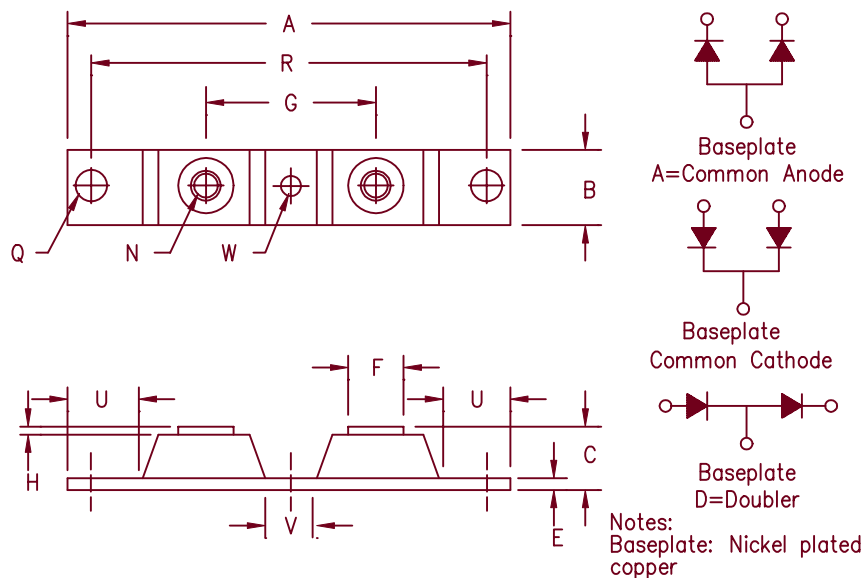

Dim. Inches		Millimeters		Notes
Min.	Max.	Min.	Max.	
A	---	3.630	---	92.20
B	0.700	0.800	17.78	20.32
C	---	0.630	---	16.00
E	0.120	0.130	3.05	3.30
F	0.490	0.510	12.45	12.95
G	1.375 BSC		34.92 BSC	
H	0.010	---	0.25	---
N	---	---	---	1/4-20
Q	0.275	0.290	6.99	7.37 Dia.
R	3.150 BSC		80.01 BSC	
U	0.600	---	15.24	---
V	0.312	0.340	7.92	8.64
W	0.180	0.195	4.57	4.95 Dia.

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
CPT30230	30V	30V

*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Power Loss
- 150°C Junction Temperature
- 300 Amperes/30 Volts
- Reverse Energy Tested

Electrical Characteristics

Average forward current per package
Average forward current per leg
Maximum surge current per leg
Maximum repetitive reverse current per leg
Max peak forward voltage per leg
Max peak reverse current per leg
Max peak reverse current per leg
Typical junction capacitance per leg

$I_F(AV)$ 300 Amps
 $I_F(AV)$ 150 Amps
 I_{FSM} 2500 Amps
 $I_R(OV)$ 2 Amps
 V_{FM} .55 Volts
 I_{RM} 1.5 Amps
 I_{RM} 10 mA
 C_J 4900 pF

$T_C = 103^\circ C$, square wave, $R_{\theta JC} = 0.2^\circ C/W$
 $T_C = 103^\circ C$, square wave, $R_{\theta JC} = 0.4^\circ C/W$
8.3ms, half sine, $T_J = 150^\circ C$
 $f = 1$ KHz, 1 μsec square wave, $T_J = 25^\circ C$
 $I_{FM} = 150A; T_J = 25^\circ C^*$
 $V_{RRM}, T_J = 125^\circ C$
 $V_{RRM}, T_J = 25^\circ C$
 $V_R = 5V, T_J = 25^\circ C, f = 1MHz$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operation junction temp range
Max thermal resistance per leg
Max thermal resistance per pkg
Typical thermal resistance (greased)
Terminal Torque
Mounting Base Torque (outside holes)
Mounting Base Torque (center hole)
center bolt must be torqued first
Weight

T_{STG}
 T_J
 $R_{\theta JC}$
 $R_{\theta JC}$
 $R_{\theta CS}$

$-55^\circ C$ to $175^\circ C$
 $-55^\circ C$ to $150^\circ C$
 $0.4^\circ C/W$ Junction to case
 $0.2^\circ C/W$ Junction to case
 $0.08^\circ C/W$ Case to sink
35-50 inch pounds
30-40 inch pounds
8-10 inch pounds

2.8 ounces (75 grams) typical

CPT30230

Figure 1
Typical Forward Characteristics – Per Leg

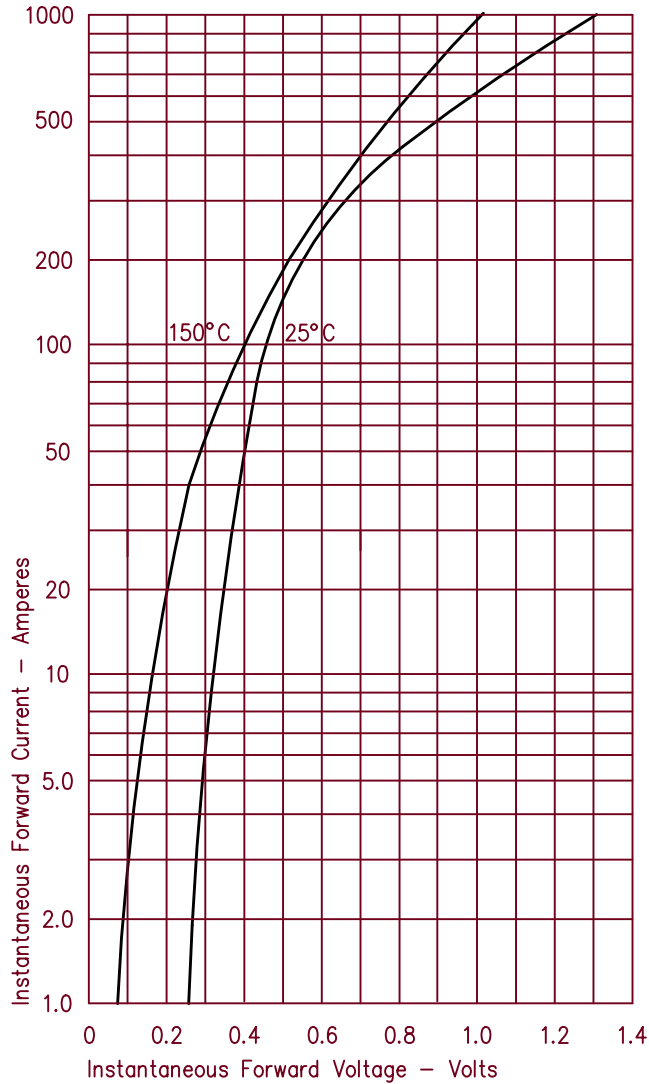


Figure 3
Typical Junction Capacitance – Per Leg

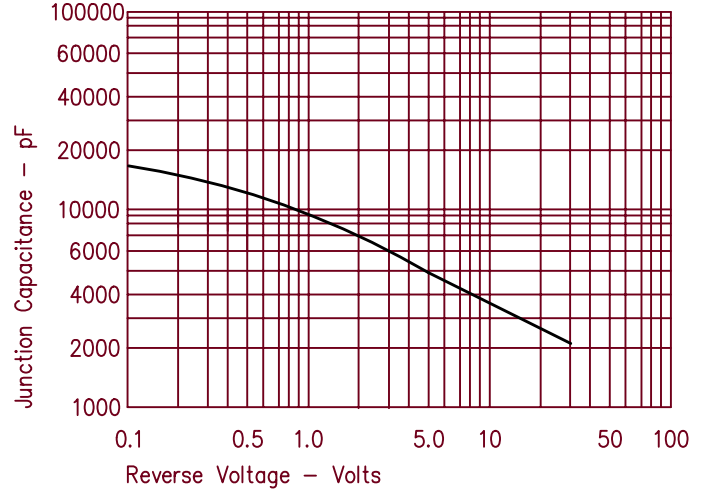


Figure 4
Forward Current Derating – Per Leg

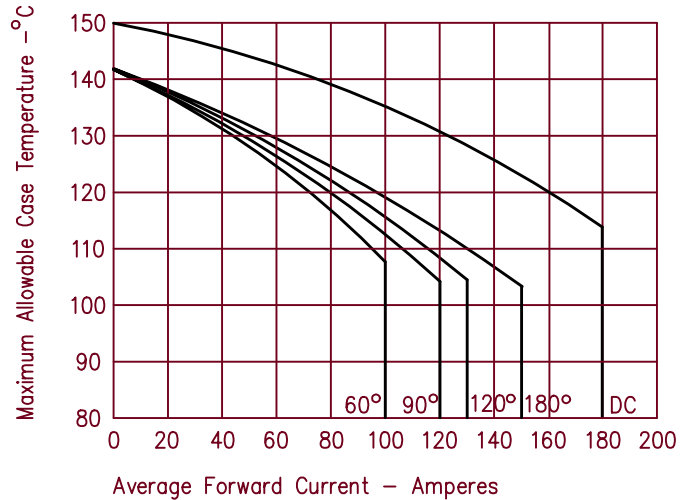


Figure 2
Typical Reverse Characteristics – Per Leg

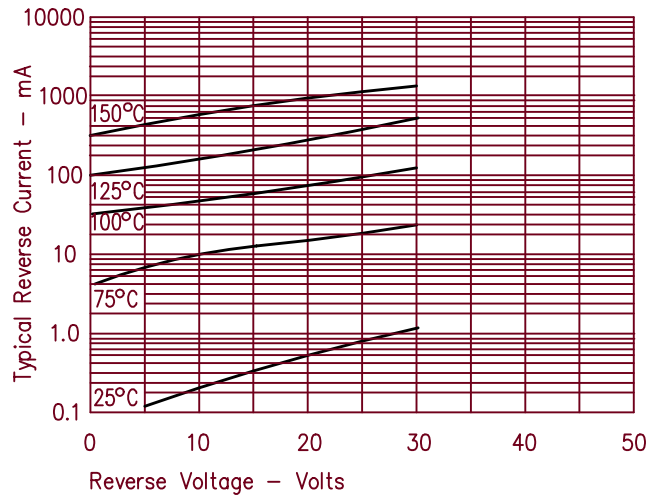


Figure 5
Maximum Forward Power Dissipation – Per Leg

