



# 2 X 160A Schottky Barrier Rectifier

## SPB16015

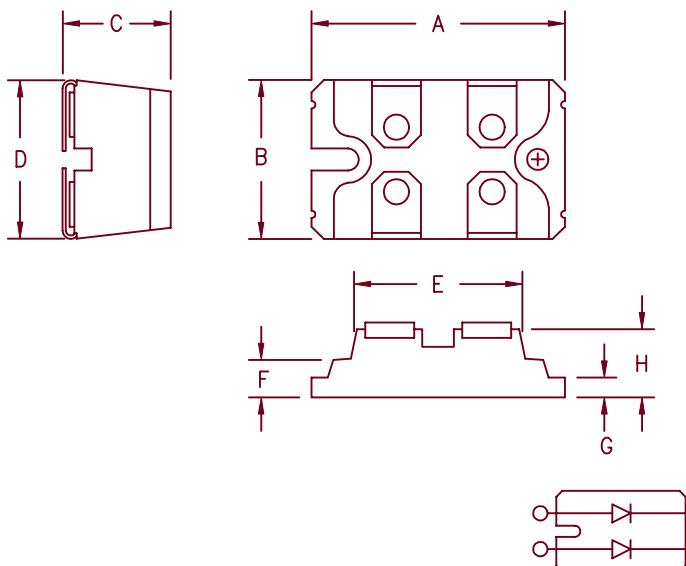

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	1.494	1.504	37.95	38.20	
B	0.976	0.986	24.79	25.04	
C	0.472	0.480	12.00	12.24	
D	0.990	1.000	25.15	25.40	
E	1.049	1.059	26.67	26.90	
F	0.164	0.174	4.16	4.42	
G	0.080	0.084	2.03	2.13	
H	0.372	0.378	9.45	9.60	

SOT-227



Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SPB16015		15V		15V

- 2500V isolation – Terminals to Base
- Low Forward Voltage Drop
- 2 Schottky Rectifiers in one pkg.
- 15V @ 160A/leg
- Low Switching losses

### Electrical Characteristics

Average forward current per leg	$I_{F(AV)}$ 160 Amps	$T_C = 102^\circ C$
Average forward current per package	$I_{F(AV)}$ 320 Amps	$T_C = 102^\circ C$
Maximum surge current per leg	$I_{FSM}$ 2500 Amps	8.3ms, half sine, $T_J = 175^\circ C$
Maximum repetitive reverse current per leg	$I_{R(OV)}$ 2 Amps	$f = 1\text{ KHz}, 25^\circ C, 1\text{ } \mu\text{sec square wave}$
Max peak forward voltage per leg	$V_{FM}$ 0.48 Volts	$I_{FM} = 160\text{A}; T_J = 25^\circ C^*$
Max peak reverse current per leg	$I_{RM}$ 40 mA	$V_{RRM}, T_J = 25^\circ C^*$
Max peak reverse current per leg	$V_{ISOL}$ 2500 VDC	any terminal to base
Typical junction capacitance per leg	$C_J$ 14000 pF	$V_R = 5.0\text{V}, T_J = 25^\circ C$

\*Pulse test: Pulse width 300  $\mu$ sec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	$T_{STG}$	-55°C to 175°C
Operating junction temp range	$T_J$	-55°C to 125°C
Max thermal resistance per leg	$R_{\theta JC}$	0.35°C/W
Max thermal resistance per pkg	$R_{\theta JC}$	0.18°C/W
Mounting Torque		9–13 inch pounds
Weight		1.1 ounces (30 grams) typical

# SPB16015

Figure 1  
Typical Forward Characteristics – Per Leg

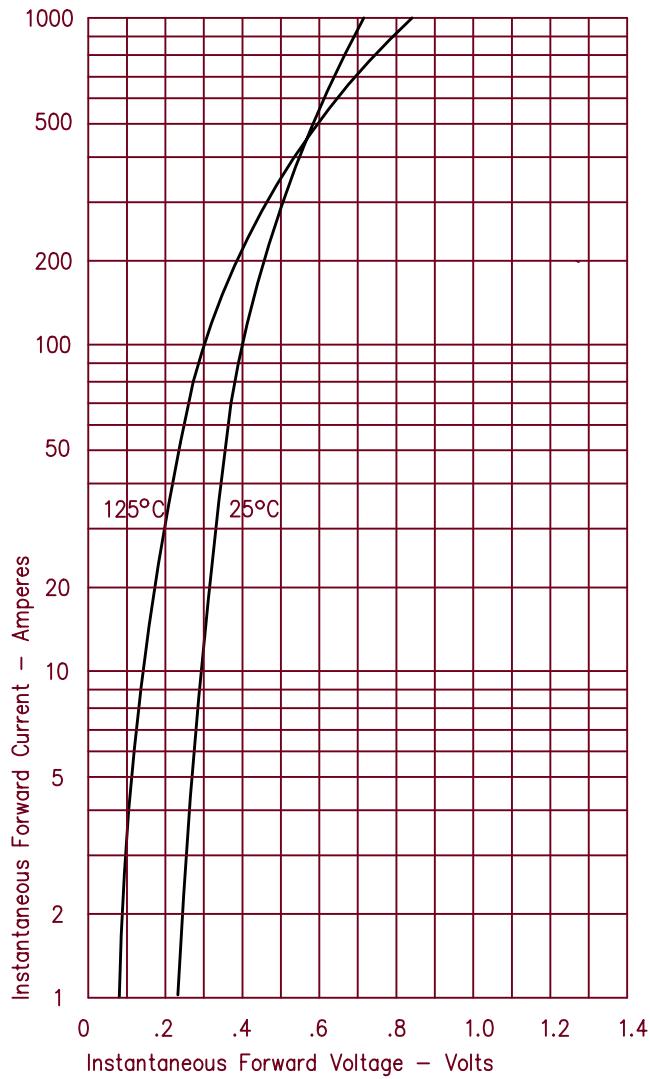


Figure 3  
Typical Junction Capacitance – Per Leg

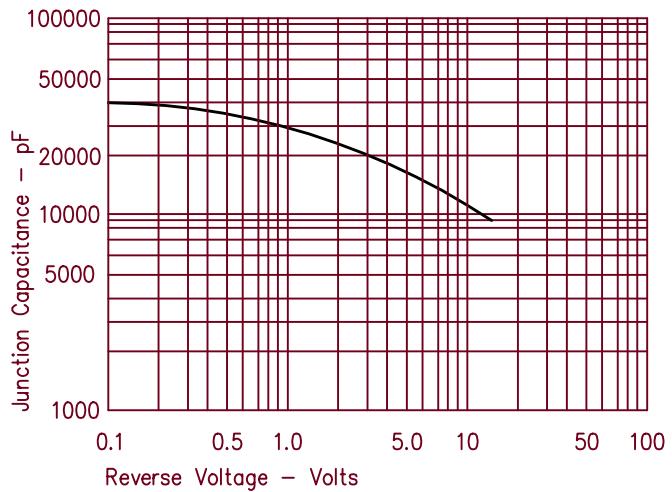


Figure 4  
Forward Current Derating – Per Leg

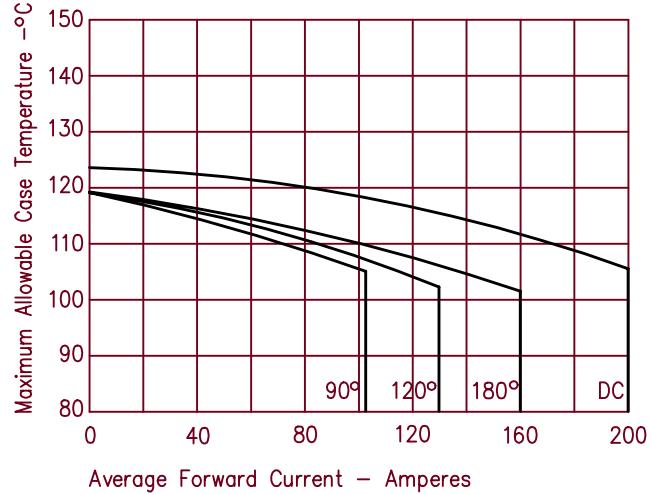


Figure 2  
Typical Reverse Characteristics – Per Leg

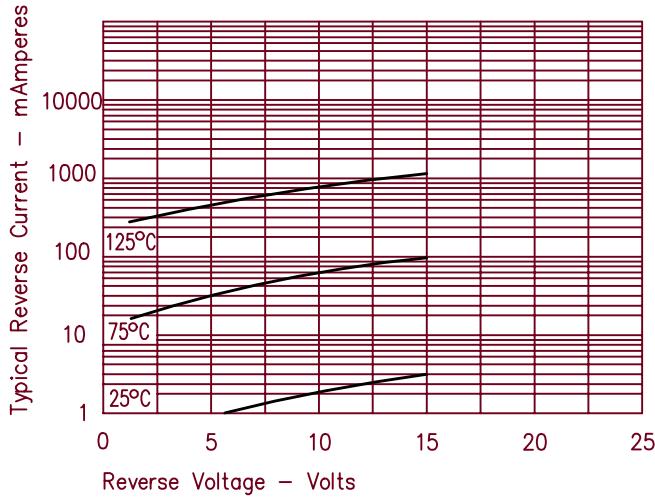


Figure 5  
Maximum Forward Power Dissipation – Per Leg

