


POWER SPLITTERS/COMBINERS

50&75Ω

12 Way-0° 1 to 1700 MHz

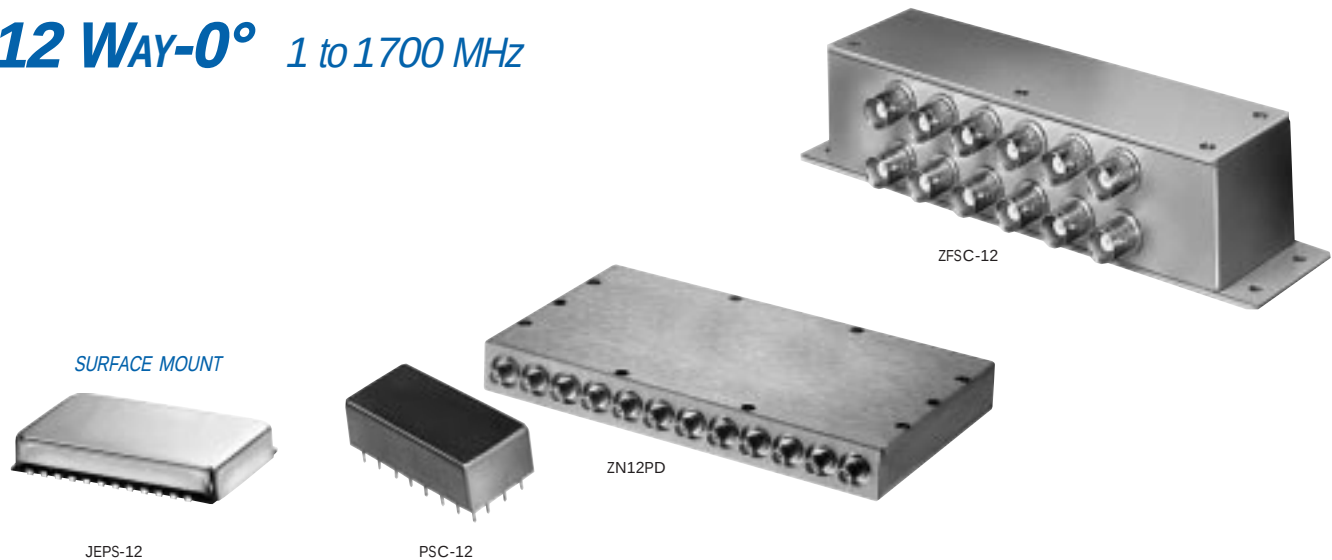

MODEL NO.	FREQ. RANGE MHz f_L - f_U	ISOLATION dB						INSERTION LOSS, dB Above 10.8dB						PHASE UNBALANCE Degrees			AMPLITUDE UNBALANCE dB			CASE STYLE Note B	CONNECTION	PRICE \$ Qty. (1-9)
		L		M		U		L		M		U		L	M	U	L	M	U			
		Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.			
◆ JEPS-12-10	50-1000	25	16	—	—	23	14	1.6	2.5	—	—	2.2	4.0	10	—	23	0.7	—	1.4	BL372	ix	109.95
■ PSC-12-1	1-200	35	30	27	20	21	18	0.5	0.8	0.8	1.2	1.0	1.4	4	8	16	0.2	0.4	0.7	E10	bu	88.95
ZN12PD-17	800-1700			30	18					0.45	1.2				14			0.7		UU589	—	249.00
ZFSC-12-1	1-200	30	25	35	20	28	20	0.8	1.2	1.1	1.4	1.3	1.6	4	8	16	0.3	0.2	0.3	R67	—	174.95
■ ZFSC-12-1W-75	5-860	33	22	30	20	26	18	0.5	1.2	0.8	2.5	1.6	4.2	2	8	20	0.7	0.8	1.5	R67	—	199.95
ZFSC-12-11	10-300	28	20	33	25	28	20	1.1	1.3	1.1	1.5	1.5	1.8	2	4	6	0.2	0.3	0.4	R67	—	174.95
■ ZFSC-12-1-75	10-200	35	27	—	—	27	20	0.5	0.8	—	—	0.8	1.3	—	—	—	0.25	—	0.4	R67	—	179.95
■ ZFSC-12-175	10-500	23	20	24	20	22	18	0.9	1.2	1.0	1.3	1.2	2.0	—	—	—	0.4	0.5	0.8	R67	—	197.95

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

NOTES:

- ◆ Aqueous washable
- Non-hermetic
- Denotes 75 Ohm model, for coax connector models 75 Ohm BNC connectors are standard.
- ✱ When only specification for M range given, specification applies to entire frequency range.
- ✱ At low range frequency band (f_L to $10 f_L$), linearly derate maximum input power by 13 dB.
- A. General Quality Control Procedures, Environmental Specifications, Hi-Rel and MIL description are given in section 0, see "Mini-Circuits Guarantees Quality" article.
- B. Connector types and case mounted options, case finishes are given in section 0, see "Case styles & Outline Drawings".
- C. Prices and specifications subject to change without notice.
- 1. Absolute maximum power, voltage and current ratings:
 - 1a. Matched power rating,
 - Model ZC16PD 10 Watt
 - Model ZN12PD 5 Watt
 - Model ZC16PD-23 2 Watt
 - Model JEPS 0.5 Watt
 - All other models 1 Watt
 - 1b. Internal load dissipation,
 - Model ZC16PD, ZC16PD-24 2.4 Watt
 - Model ZN12PD, ZC16PD-23 2 Watt
 - Model ZC16PD-2185 1.75 Watt
 - Model ZFSC-12-1W-75 1.5 Watt
 - Model JEPS-16-1W-75 0.275 Watt
 - Model JEPS-16-1W 1.875 Watt
 - All other models 0.87 Watt

NSN GUIDE

MCL NO.
ZFSC-16-1(BNC)

NSN
5820-01-9321




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED

Surface Mount □, Plug-In & Coaxial

16 Way-0° 10 kHz to 2.6 GHz

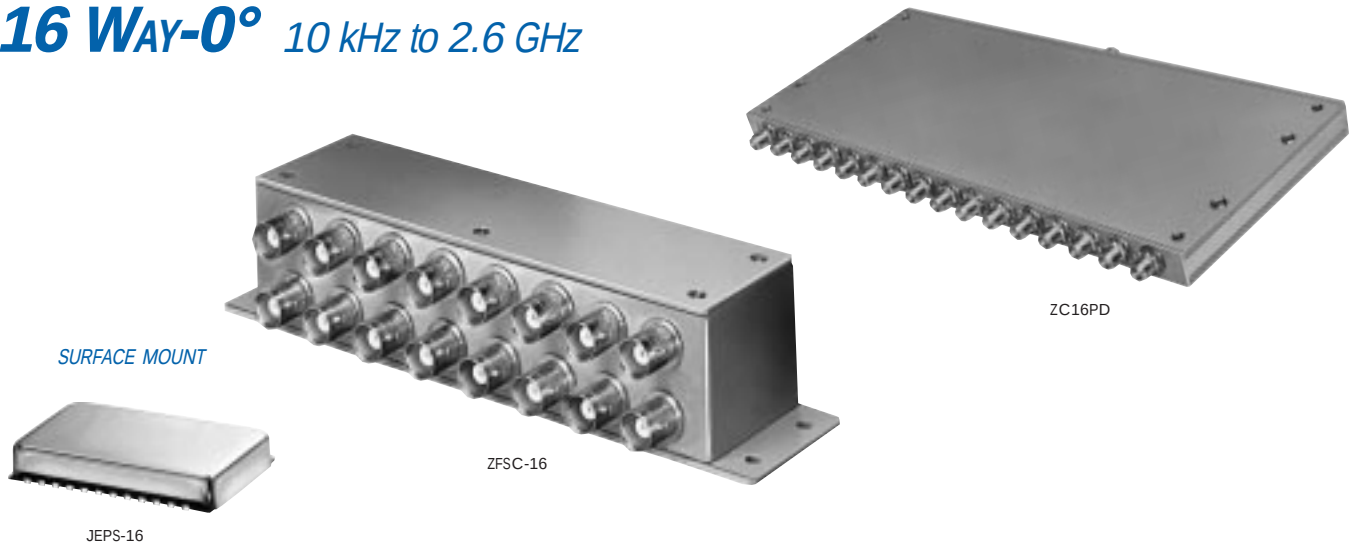

NEW ◆ ◆■	MODEL NO.	FREQ. RANGE MHz f _L -f _U	ISOLATION dB				INSERTION LOSS, dB Above 12dB						PHASE UNBAL. Degrees			AMPLITUDE UNBAL. dB			VSWR (:1)				CASE STYLE	CONNECTION	PRICE \$		
			L Typ.	M° Min.	U Typ.	Min.	L Typ.	M° Max.	U Typ.	Max.	L Max.	M° Max.	U Max.	L Max.	M° Max.	U Max.	S Typ.	OUT Max.	Typ.	Max.							
																					Max.	Max.				Max.	Max.
	JEPS-16-1W	5-1000	36	23	23	17	20	15	0.8	2.0	1.5	2.5	3.0	4.2	8	13	20	1.5	1.2	1.8	1.2	—	1.2	—	BL372	kf	79.95
	◆■ JEPS-16-1W-75	10-800	32	20	23	15	20	15	1.6	3.5	1.9	3.5	2.2	4.0	10	15	30	0.8	1.2	2.1	1.40	—	1.16	—	BL372	kf	139.95
	ZFSC-16-1	0.5-125	30	24	25	18	20	15	1.0	1.2	1.1	1.3	1.2	1.4	1	3	5	0.3	0.2	0.5	see Yoni for			R30	—	172.95	
	■ ZFSC-16-1-75	1-150	30	25	30	25	25	20	0.8	1.1	0.7	1.1	1.0	1.3	3	6	10	0.4	0.2	0.4	Performance			R30	—	182.95	
	ZFSC-16-3	1-30	—	—	45	28	—	—	0.5	0.9	0.5	0.9	0.5	0.9	1	2	3	0.1	0.1	0.1				R30	—	172.95	
	◆■ ZFSC-16-675	0.01-25	25	20	40	25	25	20	0.8	1.1	0.4	0.8	1.0	1.6	1	3	5	0.1	0.2	0.4	Data and			R30	—	189.95	
	ZFSC-16-12	0.1-200	33	20	27	20	26	20	0.6	1.5	0.7	1.0	0.9	1.5	2	6	9	0.4	0.2	0.4	curves			R30	—	189.95	
	ZC16PD-24	650-2400			25	14				0.8	2.25				14			0.9			1.20	1.90	1.10	1.50	UU640	—	349.00
	ZC16PD-900	800-900			30	20				0.5	1.0							0.5			1.06	1.20	1.06	1.20	UU179	—	295.00
	ZC16PD-960	890-960			28	20				0.5	1.0							0.5			1.06	1.30	1.06	1.20	UU179	—	295.00
	ZC16PD-960W	700-1000			26	15				0.5	1.3							0.6			1.10	1.60	1.06	1.30	UU179	—	265.00
	ZC16PD-1900	1700-1900			30	20				0.5	1.0							0.8			1.15	1.35	1.06	1.30	UU179	—	309.00
	ZC16PD-1900W	1500-2100			30	15				0.7	1.4							0.8			1.25	1.60	1.15	1.35	UU179	—	319.00
	ZC16PD-23	1500-2300			32	20				0.8	1.4				11			0.6			1.15	1.60	1.10	1.40	UU640	—	319.00
	ZC16PD-2185	1800-2600			30	16				0.5	1.4				6			0.7			1.15	1.60	1.05	1.30	UU179	—	319.00

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

see suggested PCB layout PL-090 for JEPS-16-1W model

pin connections

see case style outline drawings for pin locations

PORT	bu	kf	lx
SUM PORT	5	18	18
PORT 1	7	2	2
PORT 2	8	3	3
PORT 3	1	4	4
PORT 4	2	5	5
PORT 5	31	9	8
PORT 6	32	10	9
PORT 7	25	11	10
PORT 8	26	12	11
PORT 9	22	13	14
PORT 10	30	14	15
PORT 11	19	15	22
PORT 12	27	16	23
PORT 13	—	20	—
PORT 14	—	21	—
PORT 15	—	22	—
PORT 16	—	23	—
GND EXT.	4	all other pins	all other pins
CASE GND	all other pins	—	—
NOT USED	11,14,21	—	—
DEMO BOARD	—	TB-135	—



The Design Engineers Search Engine

Provides Actual Data Instantly
At: <http://www.minicircuits.com>

In Stock... Immediate Delivery

For Custom Versions Of Standard Models
Consult Our Applications Dept.

