

Surface Mount

Voltage Controlled Oscillator

ROS-4300-1PH19+

5V Tuning for PLL IC's 4150 to 4300 MHz

Features

- Linear tuning characteristics
- Low phase noise
- Low pushing
- Aqueous washable

Applications

- Wireless communications
- Radio altimetry
- Wireless microphones



CASE STYLE: CK605

PRICE: \$19.95 ea. QTY (5-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING VOLTAGE SENSITIVITY CAP MODULATION 3 dB RANGE (V) (MHz/V) (pF) BANDWIDTH (MHz)				NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
	Min	Max.		1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Vcc (volts)	Current (mA)
ROS-4300-1PH19+	4150	4300	+4.5	-65	-91	-112	-132	0.5	5	68 - 77	60	330	-90	-26 -18	9.5	2	5	34


Pin Connections

RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16


Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	6V
Absolute Max. Tuning Voltage (Vtune)	7V
All specifications	50 ohm system

Outline Drawing

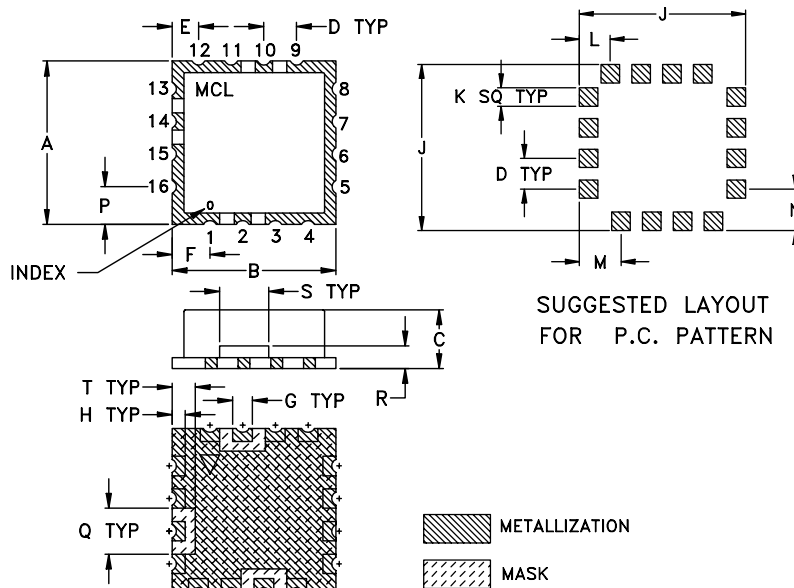

Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

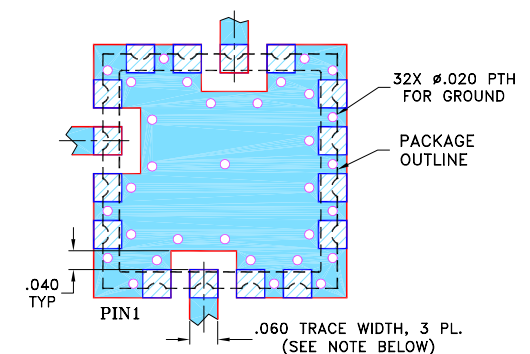

- NOTES:
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.100	.135	.135	.115	.140	.070	.150	.070		grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0

Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. OR
M105224
EDR-7416
ROS-4300-1PH19+
RAV
060611
page 1 of 2

Performance Data & Curves*

ROS-4300-1PH19+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 4225 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1KHz	10KHz	100KHz	1MHz		
0.00	101.58	4053.7	4031.7	4014.4	5.28	4.35	3.68	29.25	-24.7	-44.8	-55.3	2.14	6.97	-64.1	-90.3	-113.3	-134.1	1.0	-65.37
0.50	74.39	4100.2	4078.3	4059.0	5.23	4.44	3.62	29.24	-25.2	-44.8	-57.6	1.76	3.21	-64.2	-90.5	-113.9	-134.2	2.0	-72.19
0.75	75.29	4118.7	4096.9	4082.8	5.30	4.40	3.71	29.22	-25.6	-45.9	-57.5	1.75	5.38	-63.3	-90.4	-113.7	-133.7	3.5	-78.54
1.00	82.76	4137.4	4115.7	4099.8	5.34	4.42	3.63	29.19	-25.0	-44.4	-56.6	1.85	8.78	-65.7	-91.2	-112.8	-133.2	6.0	-83.94
1.25	69.77	4157.4	4136.4	4117.4	5.33	4.41	3.62	29.18	-26.1	-44.6	-55.8	1.86	8.08	-65.1	-91.0	-113.4	-133.8	8.5	-87.10
1.50	68.19	4176.4	4153.8	4136.9	5.33	4.41	3.60	29.20	-26.1	-50.2	-54.8	1.61	5.14	-64.7	-90.9	-113.2	-133.6	10.0	-89.24
1.75	75.82	4193.7	4170.9	4155.6	5.38	4.42	3.62	29.18	-25.3	-47.8	-54.5	1.70	4.28	-66.2	-91.3	-113.5	-131.3	20.8	-96.01
2.00	73.19	4212.5	4189.8	4172.4	5.37	4.38	3.61	29.14	-25.5	-51.3	-55.4	1.95	9.27	-65.0	-90.9	-113.3	-134.3	35.5	-102.24
2.25	67.82	4231.4	4208.1	4191.8	5.31	4.44	3.60	29.16	-25.6	-45.5	-56.1	1.62	8.61	-65.9	-91.0	-112.6	-133.2	60.7	-106.60
2.50	74.65	4249.2	4225.1	4209.4	5.35	4.46	3.63	29.15	-25.5	-45.5	-58.0	1.69	7.05	-65.2	-89.6	-111.3	-131.5	86.7	-110.11
2.75	74.21	4267.6	4243.8	4226.1	5.46	4.40	3.65	29.14	-25.6	-47.3	-58.0	1.79	2.27	-64.0	-91.9	-112.8	-133.4	100.0	-111.16
3.00	76.30	4288.4	4262.3	4244.4	5.39	4.35	3.64	29.12	-25.8	-45.0	-59.3	1.82	6.99	-67.6	-92.4	-113.1	-133.5	148.1	-114.78
3.25	70.71	4306.5	4281.4	4265.0	5.35	4.49	3.53	29.13	-26.5	-45.3	-59.3	1.70	8.26	-66.4	-91.5	-112.8	-133.0	177.0	-116.08
3.50	76.88	4324.9	4299.1	4283.1	5.42	4.51	3.67	29.12	-26.1	-43.9	-58.5	1.81	9.30	-64.3	-90.1	-112.5	-132.8	211.6	-117.77
3.75	72.10	4343.8	4318.3	4300.1	5.48	4.40	3.69	29.11	-25.8	-42.7	-58.4	1.87	6.50	-63.3	-90.6	-112.2	-132.7	302.4	-120.77
4.00	80.26	4364.9	4336.3	4318.9	5.43	4.33	3.61	29.10	-26.1	-44.1	-56.8	1.84	2.80	-62.5	-89.9	-111.1	-131.4	361.5	-122.41
4.25	73.09	4384.2	4356.4	4337.6	5.35	4.41	3.50	29.08	-27.1	-44.0	-54.3	2.08	8.61	-63.3	-91.5	-112.6	-133.4	507.5	-125.44
4.50	70.60	4401.7	4374.6	4358.2	5.45	4.44	3.57	29.08	-26.5	-44.7	-53.3	2.01	11.39	-66.1	-90.3	-112.3	-132.9	606.7	-127.12
4.75	64.82	4419.3	4392.3	4374.8	5.47	4.35	3.61	29.08	-26.4	-44.7	-53.6	1.92	8.04	-67.5	-91.0	-113.4	-133.6	851.6	-129.90
5.00	72.28	4437.8	4408.5	4392.4	5.44	4.30	3.52	29.05	-27.5	-45.6	-52.2	1.97	2.75	-64.8	-91.1	-113.1	-133.5	1000.0	-131.47

*at 25°C unless mentioned otherwise

