

Ultra-Small Ceramic

3 Way-0°

50Ω

950 to 1600 MHz

Maximum Ratings



Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

* Derate linearly to 6W at 100°C ambient.


Pin Connections

SUMPORT	2
PORT 1	6
PORT 2	5
PORT 3	4
GROUND	1,3
PORT 1-2, 2-3	resistor external 124 OHMS
PORT 1-3	resistor external 127 OHMS

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within $\pm .002$

Outline Dimensions (inch)

A	B	C	D	E	F
.126	.063	.037	.024	.022	.012
3.20	1.60	0.94	0.61	0.56	0.30

G	H	J	K	wt
.039	.042	.024	.123	grams
0.99	1.07	0.61	3.12	.020

Demo Board MCL P/N: TB-303
Suggested PCB Layout (PL-171)

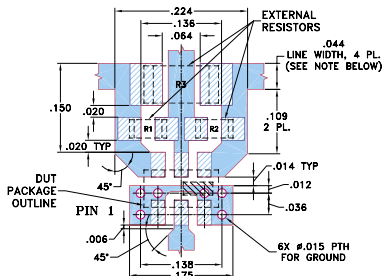

RESISTORS: R1-R2: 124 Ohm, 0603 SIZE; R3: 127 Ohm, 1206 SIZE.

NOTE:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS: .020 ± .0015; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. RESISTOR LAND PATTERNS ARE SHOWN AS PER IPC-SM-782A.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- isolation resistors, external
- low insertion loss, 0.6 dB typ.
- excellent amplitude unbalance, 0.2 dB typ.
- very good phase unbalance, 3 deg. typ.
- high isolation, 15 dB typ.
- excellent power handling, 15W as splitter
- small size, 0.12"X0.06"X0.035"
- ESD non-sensitive
- temperature stable LTCC technology
- wrap around, terminations for excellent solderability
- low cost

Applications




- DSS
- WLAN
- satellite communication
- line of sight communications
- GSM, GPS
- ISM applications
- defense applications

Splitter Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 4.8 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		RETURN LOSS (dB)	
$f_c - f_u$	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	INPUT Typ.	OUTPUT Typ.
950-1600	0.6	1.2	15	11	3	5	0.2	0.5	14	20
1200-1400	0.3	0.8	20	14	2	5	0.2	0.4	17	19

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	Return Loss (dB)		
	S-1	S-2	S-3		1-2	1-3	2-3		S	1	2
950.00	5.42	5.34	5.42	0.08	1.94	14.93	13.32	15.30	11.10	21.04	19.70
1000.00	5.37	5.29	5.37	0.08	2.02	15.99	13.99	16.38	11.91	21.04	20.18
1050.00	5.32	5.24	5.32	0.08	2.12	17.23	14.75	17.66	12.81	20.79	20.41
1100.00	5.28	5.19	5.28	0.09	2.21	18.74	15.64	19.23	13.90	20.24	20.37
1150.00	5.24	5.15	5.24	0.09	2.32	20.65	16.70	21.23	15.20	19.62	19.96
1200.00	5.21	5.12	5.22	0.09	2.42	23.15	17.95	23.86	16.68	19.07	19.59
1250.00	5.19	5.11	5.20	0.10	2.53	26.68	19.50	27.55	18.37	18.56	19.14
1300.00	5.19	5.10	5.20	0.10	2.61	31.40	21.43	31.87	19.89	18.26	18.75
1350.00	5.20	5.11	5.22	0.11	2.66	31.35	23.85	30.21	20.36	18.11	18.57
1400.00	5.23	5.14	5.25	0.11	2.77	26.27	26.57	25.45	19.18	18.14	18.49
1450.00	5.29	5.19	5.31	0.11	2.89	22.42	27.77	21.90	17.07	18.44	18.78
1500.00	5.37	5.28	5.40	0.12	2.91	19.61	25.76	19.26	14.81	19.03	19.18
1550.00	5.48	5.40	5.52	0.12	2.94	17.45	22.72	17.20	12.80	20.12	20.07
1600.00	5.64	5.56	5.68	0.12	2.99	15.72	20.10	15.54	11.01	21.67	21.69

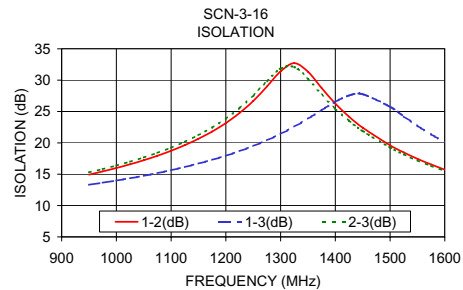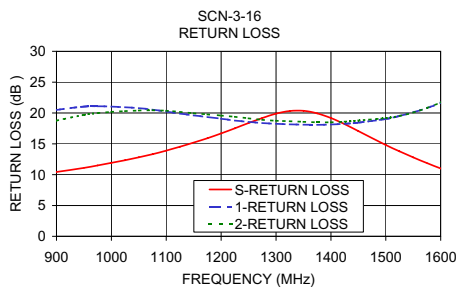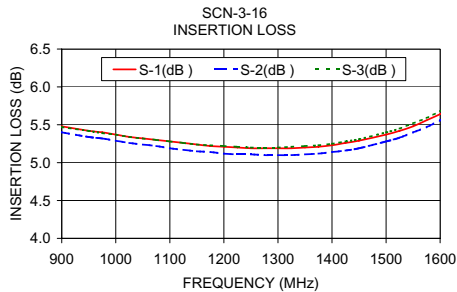

electrical schematic



CASE STYLE: FV1206-1

PRICE: \$3.95 ea. QTY. (10-49)

\$3.25 ea. QTY. (100)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.